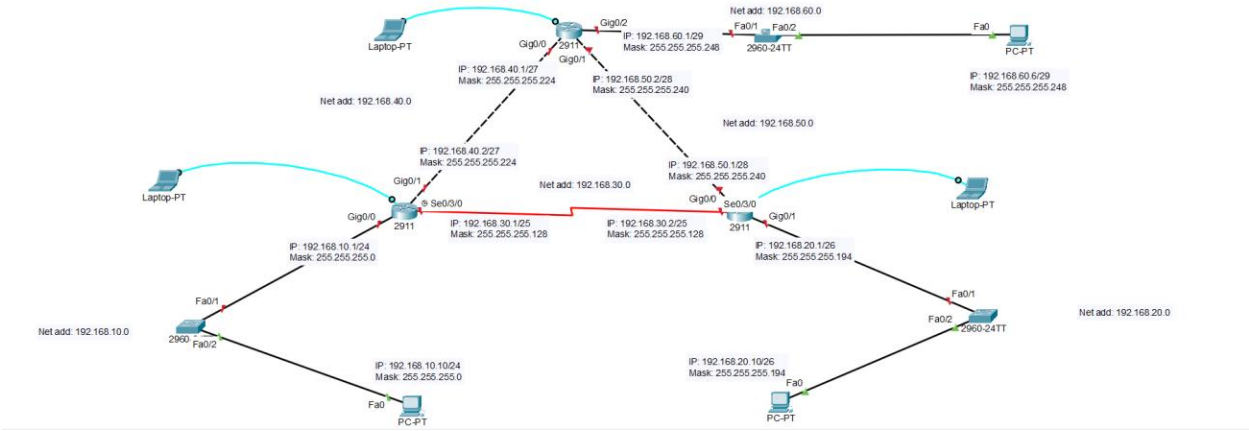


Fig: Topology for the Dynamic routing

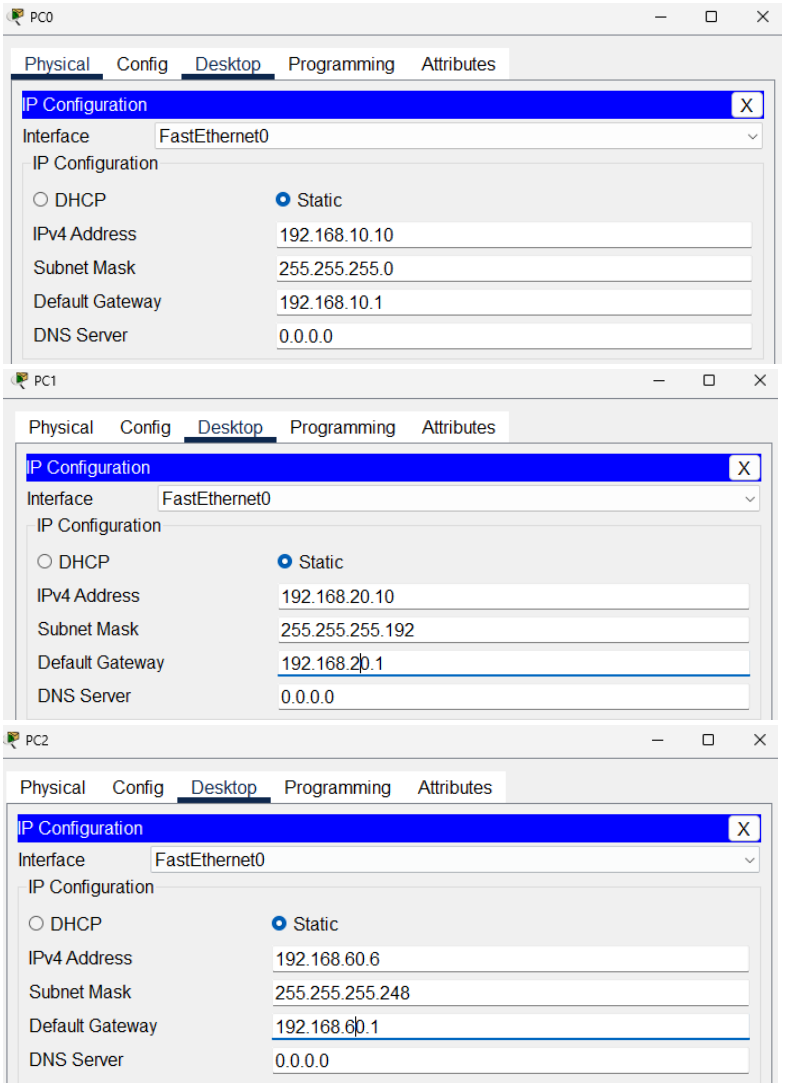


Fig: PC0, PC1, PC2 assigning ip, subnet mask. G/W

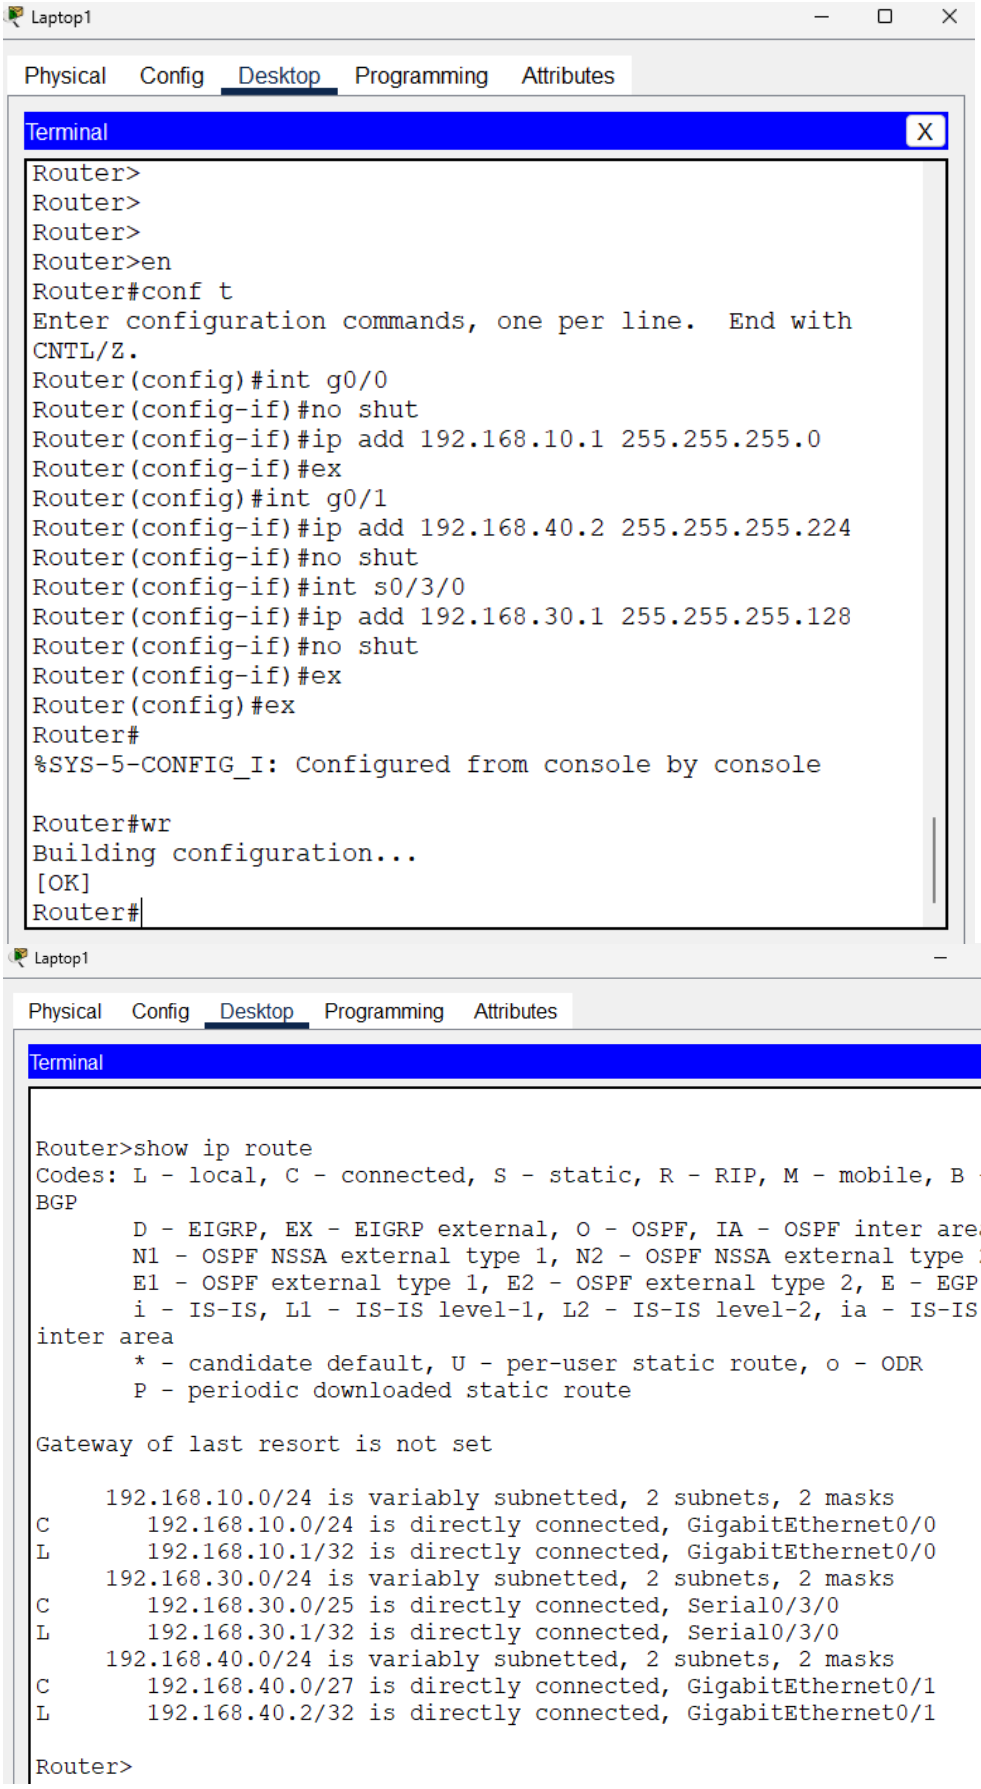


Fig: Assigning G/W in router1 & verification

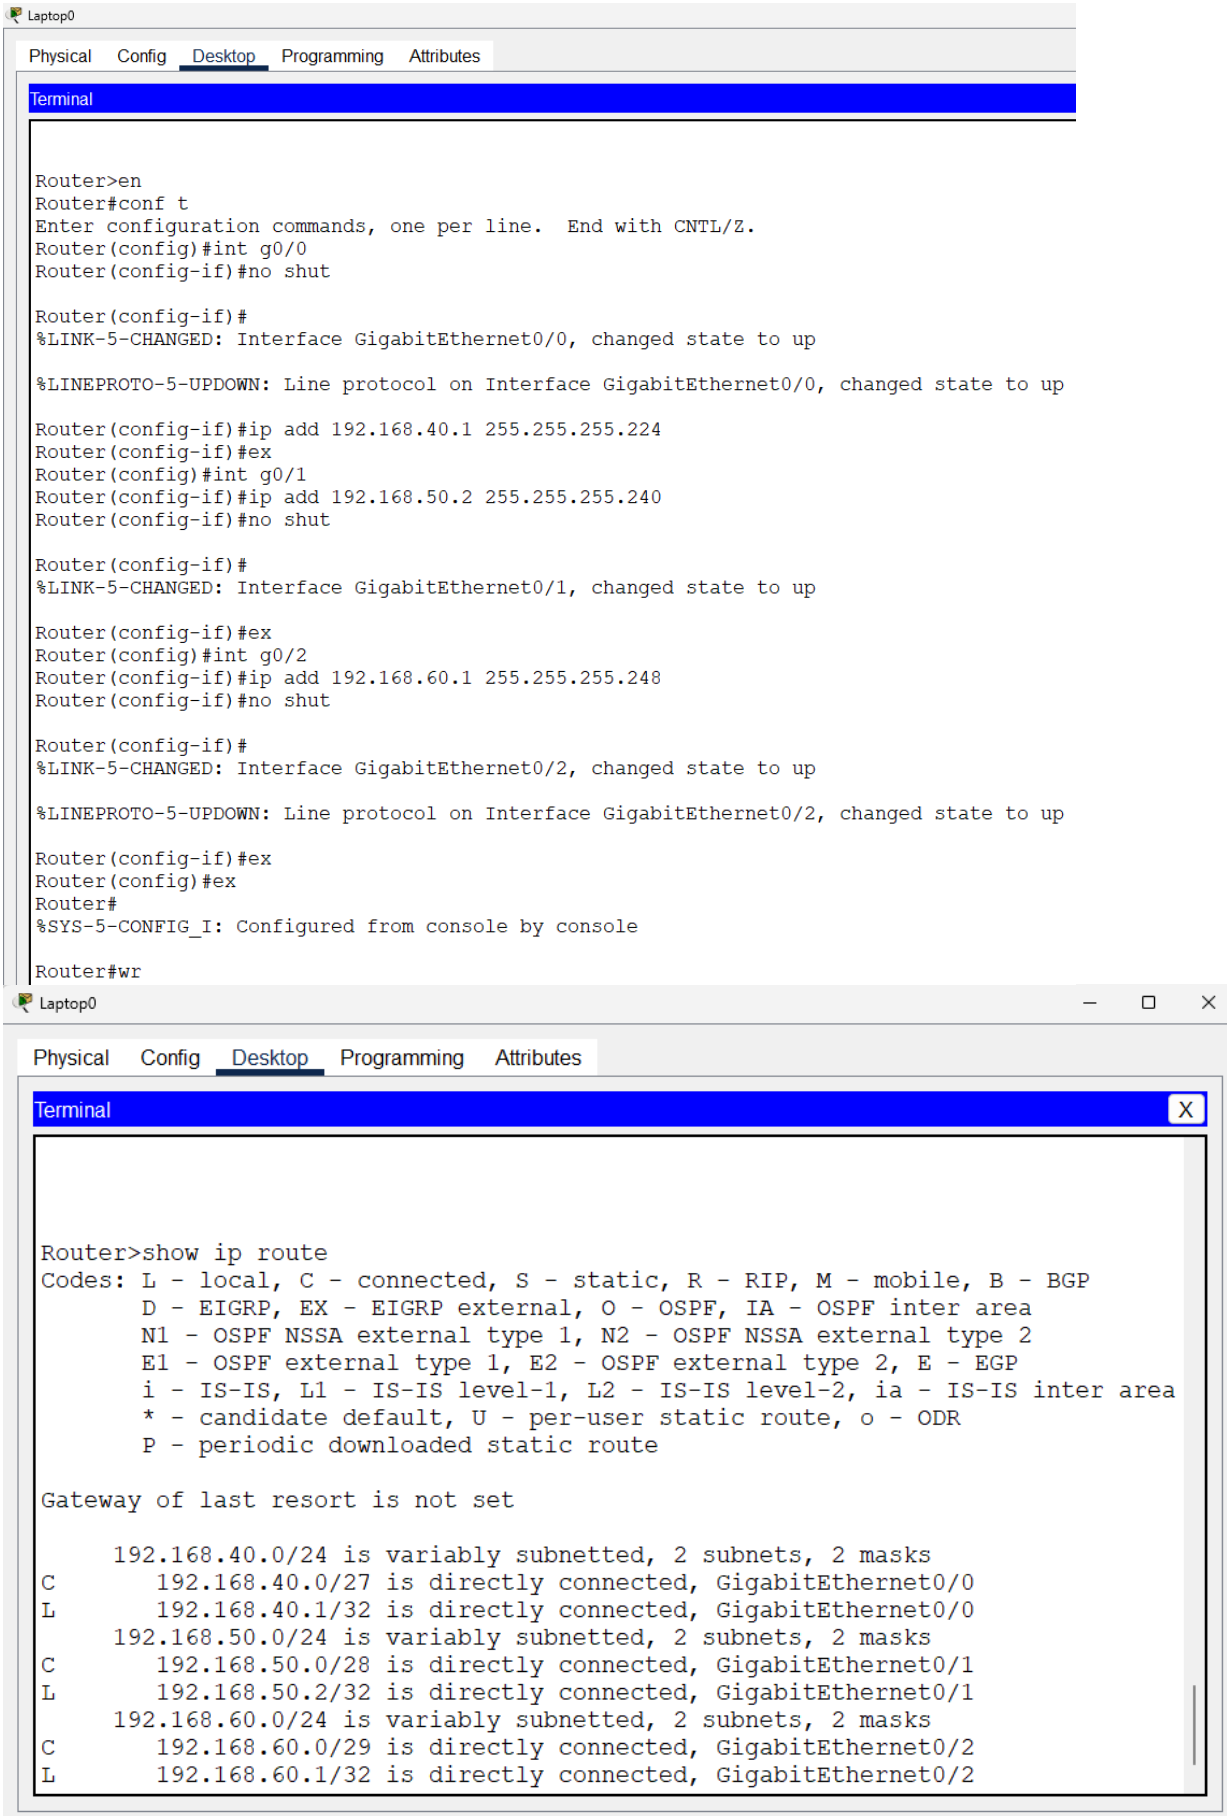
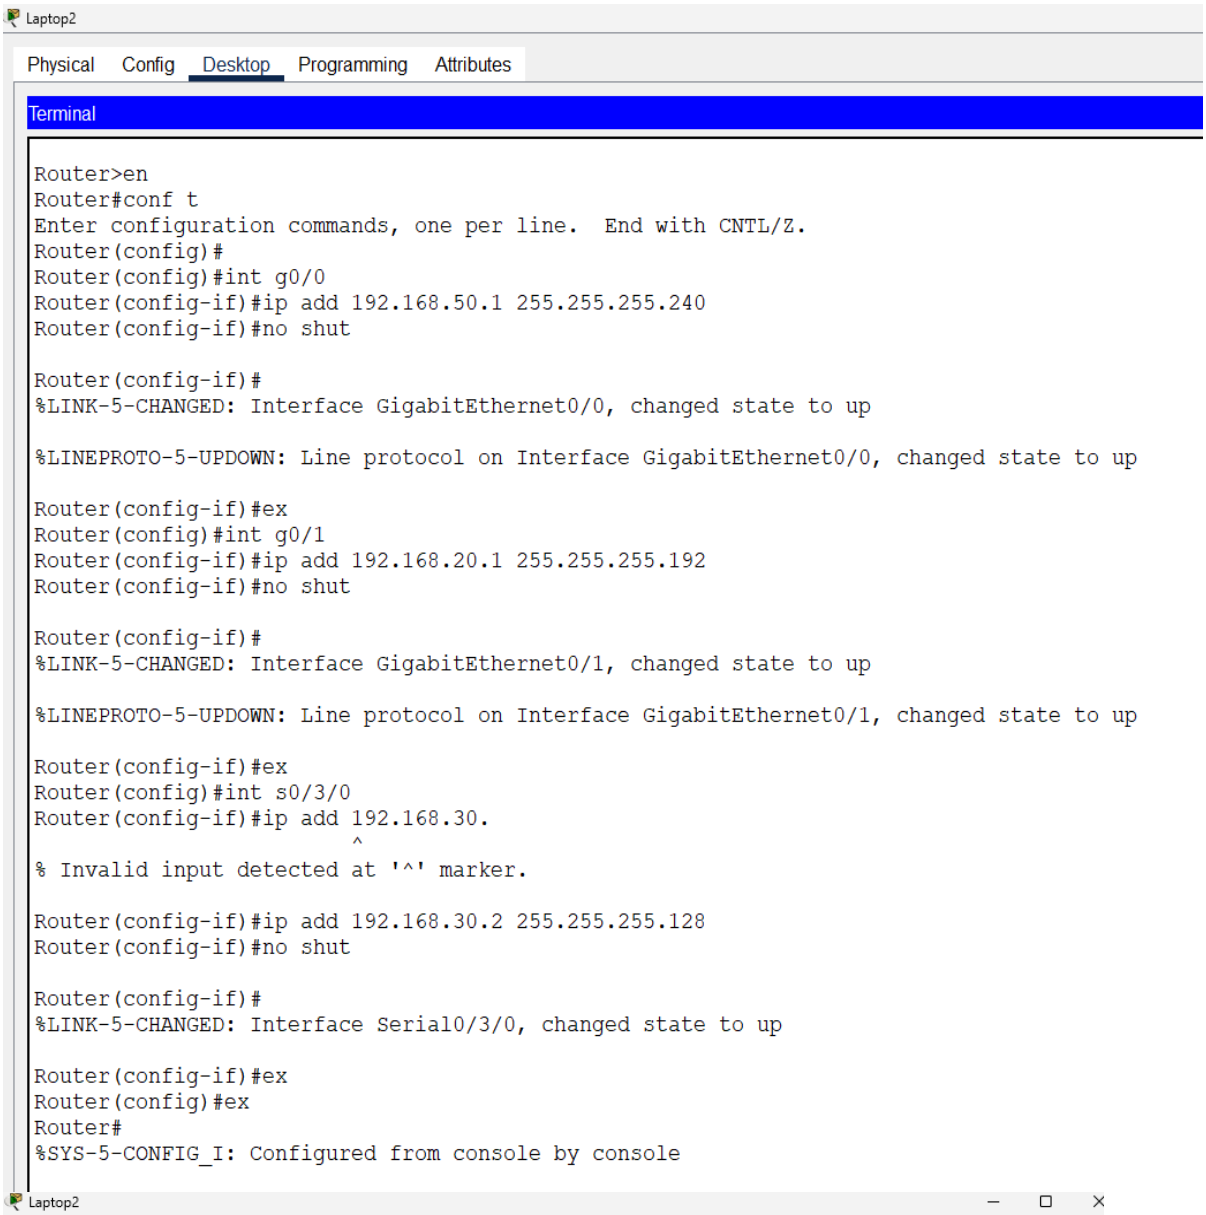


Fig: Assigning G/W in router0 & verification



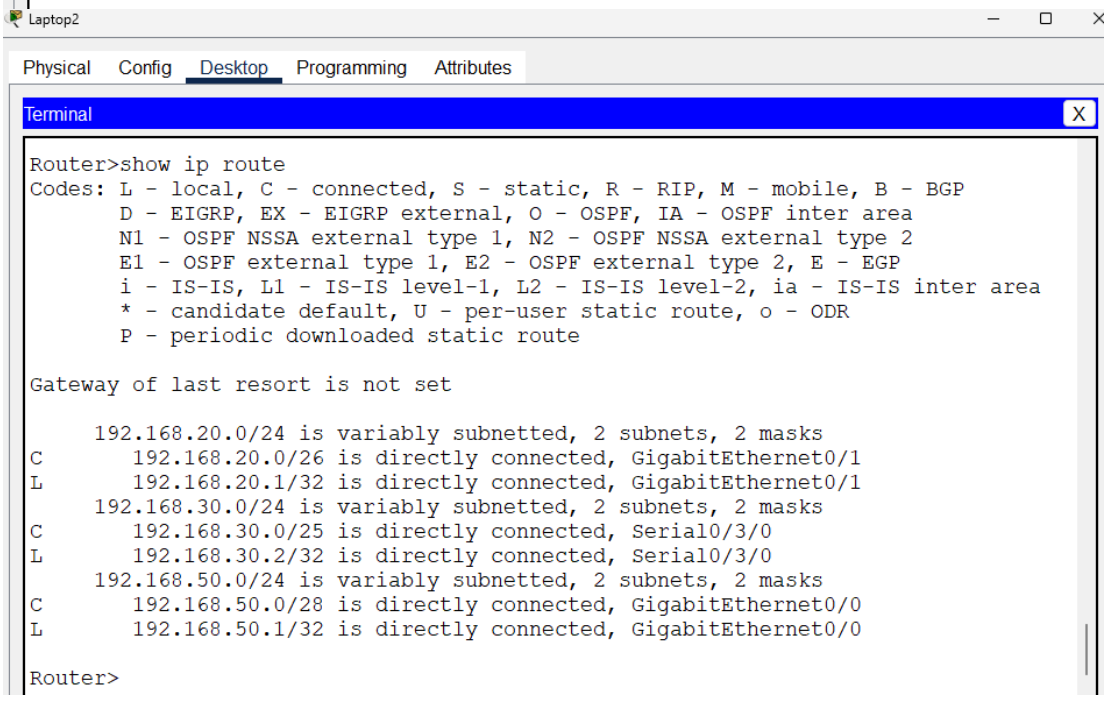


Fig: Assigning G/W in router2 & verification

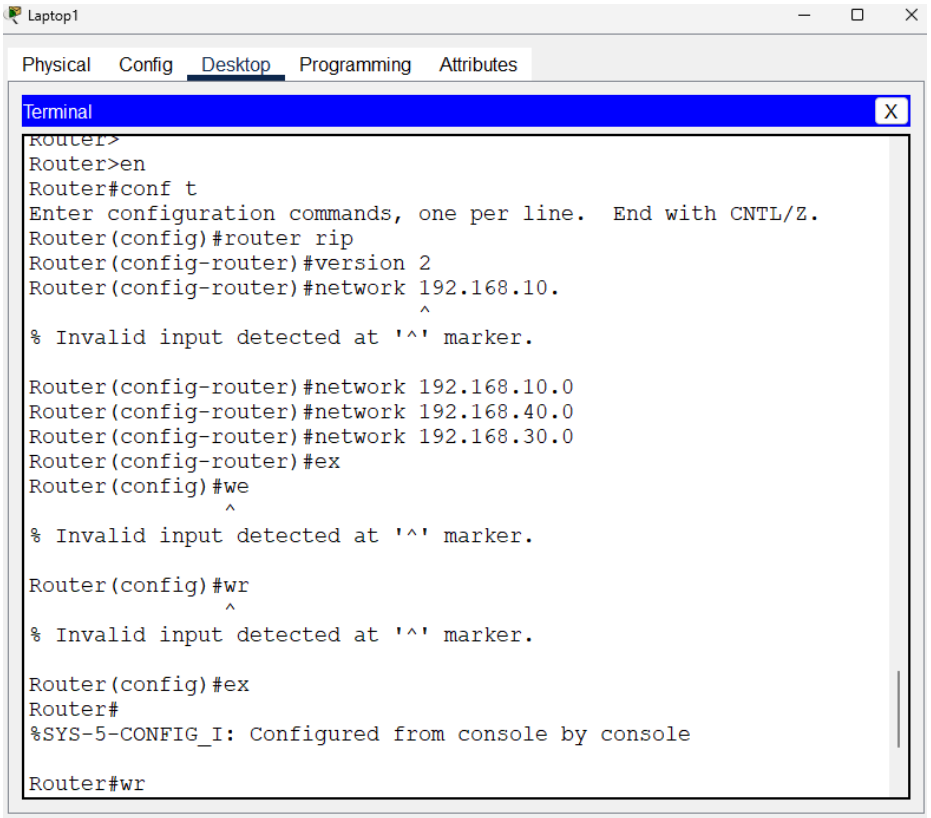




Fig: Cmnd for dynamic routing & verification in router 1

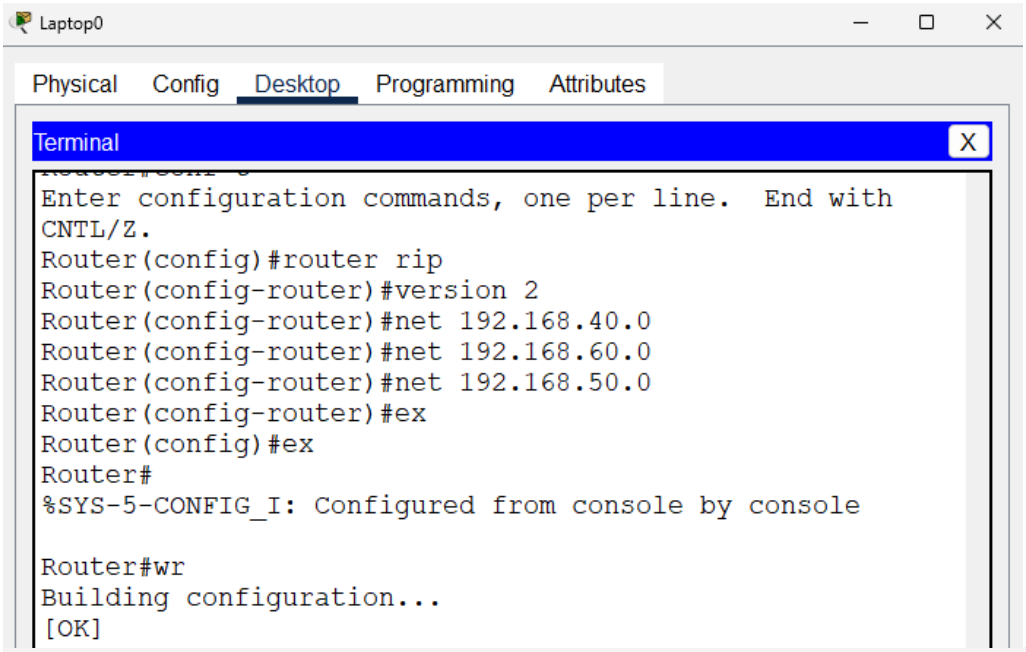
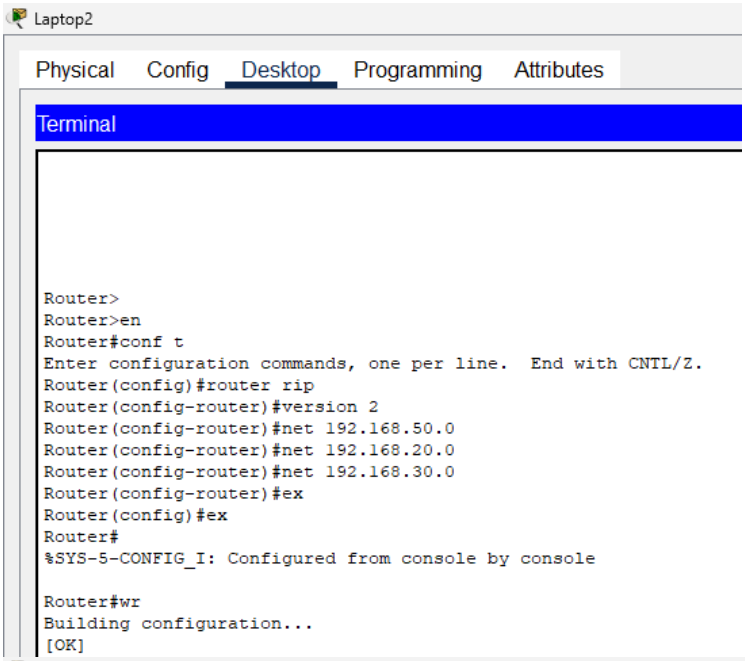




Fig: Cmnd for dynamic routing & verification in router0



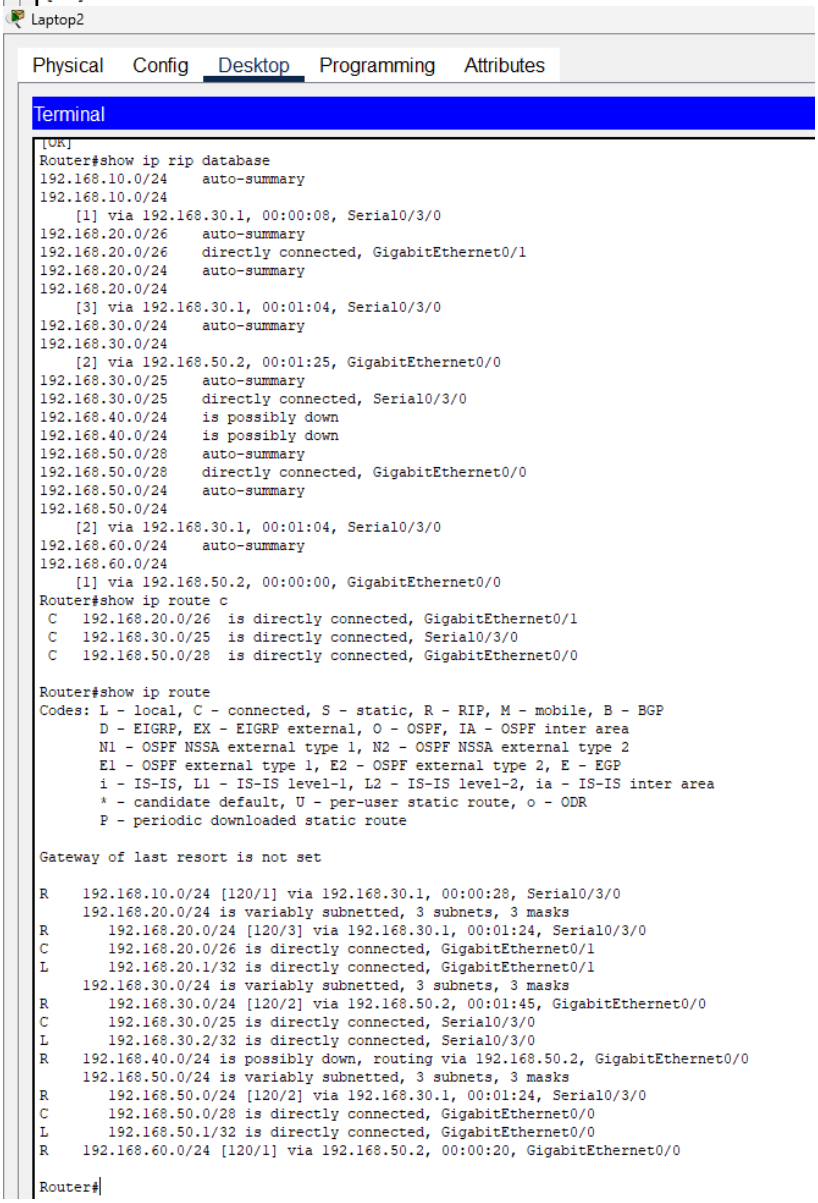


Fig: Cmnd for dynamic routing & verification in router2

PC0

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
C:\>
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time=17ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Reply from 192.168.20.10: bytes=32 time=1ms TTL=126
Reply from 192.168.20.10: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 17ms, Average = 5ms

C:\>ping 192.168.60.6

Pinging 192.168.60.6 with 32 bytes of data:

Reply from 192.168.60.6: bytes=32 time=18ms TTL=126
Reply from 192.168.60.6: bytes=32 time<1ms TTL=126
Reply from 192.168.60.6: bytes=32 time=1ms TTL=126
Reply from 192.168.60.6: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.60.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 18ms, Average = 4ms

C:\>tracert 192.168.20.10

Tracing route to 192.168.20.10 over a maximum of 30 hops:

  1    0 ms      0 ms      0 ms      192.168.10.1
  2    0 ms      0 ms      0 ms      192.168.30.2
  3    0 ms      0 ms      8 ms      192.168.20.10

Trace complete.

C:\>tracert 192.168.60.6

Tracing route to 192.168.60.6 over a maximum of 30 hops:

  1    0 ms      0 ms      0 ms      192.168.10.1
  2    0 ms      0 ms      0 ms      192.168.40.1
  3    0 ms      0 ms      0 ms      192.168.60.6

Trace complete.
```


PC0

Physical | Config | Desktop | Programming | Attribu

Command Prompt

```
Reply from 192.168.20.10: bytes=32 time=1ms TTL=126
Reply from 192.168.20.10: bytes=32 time=23ms TTL=126
Reply from 192.168.20.10: bytes=32 time=1ms TTL=126
Reply from 192.168.20.10: bytes=32 time=127ms TTL=126
Reply from 192.168.20.10: bytes=32 time=22ms TTL=126
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Request timed out.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Request timed out.
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
Reply from 192.168.20.10: bytes=32 time<1ms TTL=125
```

Fig: Verification From PC0 to PC1(with serial cable & without serial cable) & PC2

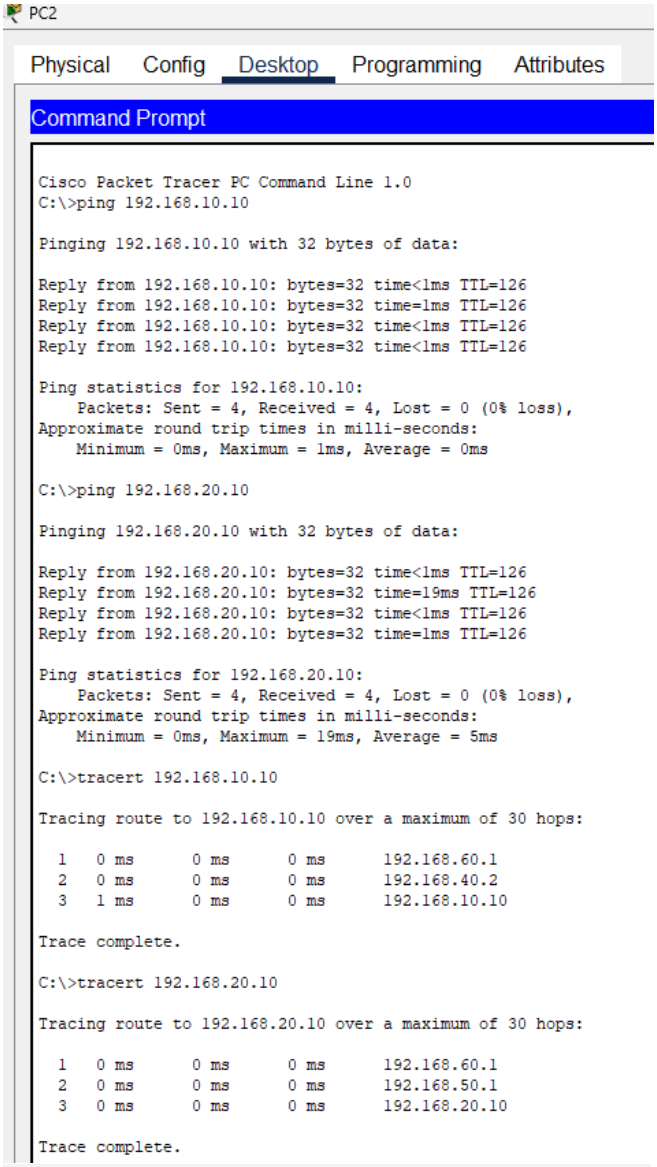

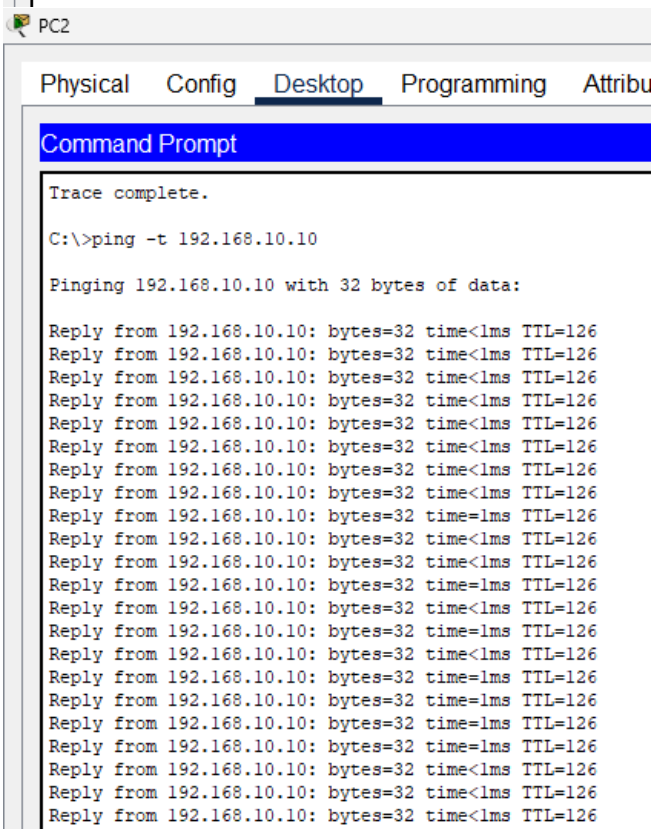
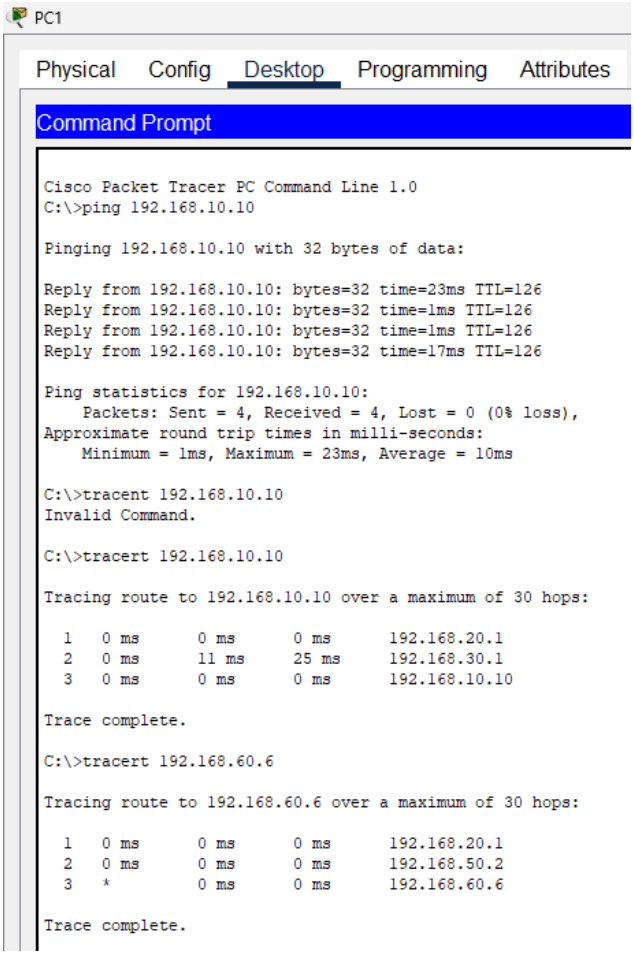


Fig: Verification From PC2 to PC0& PC1



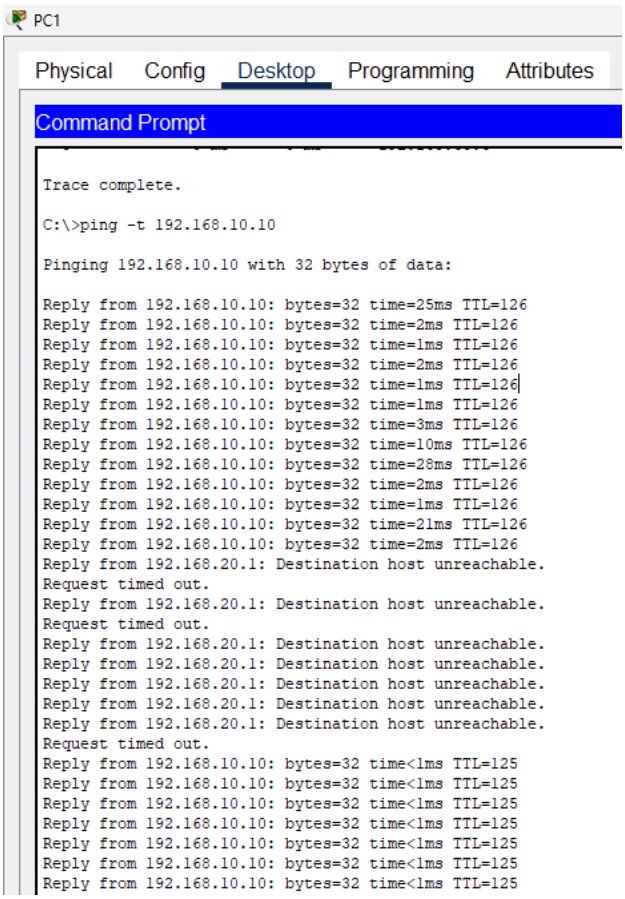


Fig: Verification From PC1 to PC0(with serial cable & without serial cable) & PC2