



UNIVERSITÀ
DEGLI STUDI
DI PADOVA

UNIVERSIDADE DE LISBOA
INSTITUTO SUPERIOR TÉCNICO

Università degli Studi di Padova

Tokamak Magnetic Control Simulation: Applications for JT60-SA and ISTTOK Operation.

Doménica Corona Rivera

Supervisor: Prof. Horácio Fernandes

Co-Supervisor: Prof. Nuno Cruz

External supervisor: Prof. Alfredo Pironti

Thesis specifically prepared to obtain the PhD Degree in
Technological Physics Engineering

Month 2020

ABSTRACT

Abstract en ingles

Keywords:Real-time control, plasma current, centroid position, state-space

RESUMO

Abstract em tuga

Palavras-chave:

SOMMARIO

Abstract em italiano

Parole chiave:

ACKNOWLEDGEMENTS

This work was supported by Fundação para a Ciência e a Tecnologia (FCT) under the grant No.**PD/BD/114306/2016** carried out as part of the training in the framework of the Advanced Program in Plasma Science and Engineering (APPLAuSE, sponsored by FCT under grant No. PD/00505/2012).

CONTENTS

1	INTRODUCTION	3
1.1	Tokamak plasma control	3
1.2	Behind the plasma current	3
1.3	Thesis outline	3
2	PLASMA CONTROL SYSTEMS	5
2.1	Overview of control systems	5
2.1.1	DIII-D Plasma Control System	5
2.1.2	Système de Contrôle Distribué	5
2.2	MARTe framework	7
2.2.1	MARTe architecture	7
2.2.2	Hardware containers	7
2.2.3	MARTe 2.0	7
2.3	Equilibrium and control algorithms	7
2.3.1	PID control	7
2.3.2	Multiple-Input Multiple-Output control	7
3	JT60-SA CONTROL DESIGN	9
3.1	Machine description	9
3.2	CREATE tools	9
3.3	Controller designs	9
3.4	QST tools implementation	9
3.5	Simulation results	9
4	ISTTOK	11
4.1	Machine description	11
4.2	Diagnostics and Actuators	11
4.3	ATCA-MIMO-ISOL boards	11
4.3.1	Hardware layout	11
4.3.2	Real-time integration software	11
4.4	Plasma current magnetic field	11
4.5	Plasma centroid position determination	11
5	ISTTOK RESULTS	13
5.1	Implementation of the General Application Modules	13
5.1.1	PID control implementation	13

Contents

5.1.2	Multiple-Input Multiple-Output control implementation	13
5.2	Results	13
5.2.1	PID control and LQR control results	13
6	CONCLUSIONS	15
	Bibliography	17
A	DEMONSTRATIONS	19

LIST OF FIGURES

- Figure 2.1 DIII-D digital PCS in 1991 [1]. 6
- Figure 2.2 TCV SCD. Real-time network nodes connection. The nodes configurations are shown together with the typical diagnostic and actuator systems to which they are connected [3]. 6

LIST OF TABLES

LIST OF ABBREVIATIONS

@TODO: Review variable lists as writing the thesis

- AC - Alternating Current
- ADC - Analog to Digital Converter
- ATCA - Advanced Telecommunications Computing Architecture
- CREATE - Consorzio di Ricerca per l'Energia, l'Automazione e le Tecnologie dell'Elettromagnetismo
- DAC - Digital to Analog Converter
- EO - Electronic Offset
- IST - Istituto Superior T cnico
- LQR - Linear Quadratic Regulator
- MARTe - Multi-threaded Application Real-Time executor
- MIMO - Multiple-Input Multiple-Output
- PCS - Plasma Control System
- PF - Poloidal Field
- PID - Proportional - Integrative - Derivative
- SCD - Syst me de Contr le Distribu 
- XSC - eXtreme Shape Controller
- WO - Wiring Offset

LIST OF VARIABLES

@TODO: Review variable lists as writing the thesis

VARIABLES:

- I_p - Plasma current
- B_p - Poloidal magnetic field
- μ_0 - Vacuum permeability

INTRODUCTION

1.1 TOKAMAK PLASMA CONTROL

1.2 BEHIND THE PLASMA CURRENT

1.3 THESIS OUTLINE

PLASMA CONTROL SYSTEMS

2.1 OVERVIEW OF CONTROL SYSTEMS

The control of plasma position, shape and current among other parameters is one of the crucial engineering problems for present and future magnetic confinement devices. The Plasma Control Systems (PCS) lead with the overall control of fusion devices being responsible also for the plasma configuration and scenarios algorithms [2, Chapter 8]. Currently different PCS's are use in the tokamaks around the world. In this chapter the "DIII-D-like" PCS, the *Système de Contrôle Distribué* (SCD) and the Multi-threaded Application Real-Time executor (MARTE) will be approach, this last one being of special interest due to its extensive utilization in this work.

2.1.1 *DIII-D Plasma Control System*

Early documentation regarding the PCS in DIII-D¹ reefers to digitalization of analog signals transmitted to a high speed processor executing a shape control algorithm and then writing the result to a digital to analog converter for driving the controlled systems . The real-time computer used allowed to performed operations with vectors and matrices required for the plasma shape control algorithm [1]. Figure 2.1 shows the block diagram of the DIII-D PCS 30 years ago.

Blablabla

2.1.2 *Système de Contrôle Distribué*

The TCV distributed control system uses a modular network of real time PC nodes liken by a real time network to provide feedback control over all of the actuator systems. Each node consists of a Linux PC either embedded on a Compact-PCI module or as a desktop computer with Intel CPU. A real time CPU-only node is dedicated to the real time equilibrium reconstruction and fast Fourier transforms for MHD detection. [3]

¹ DIII-D is a D-shape tokamak operated by General Atomics in San Diego, California.

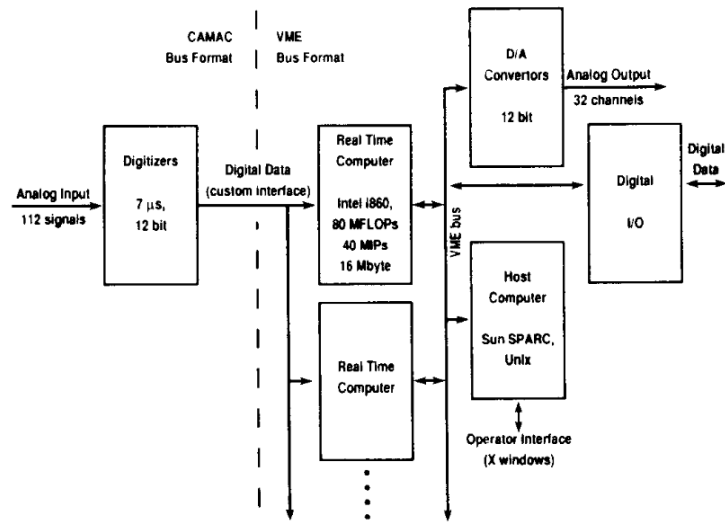


Figure 2.1.: DIII-D digital PCS in 1991 [1].

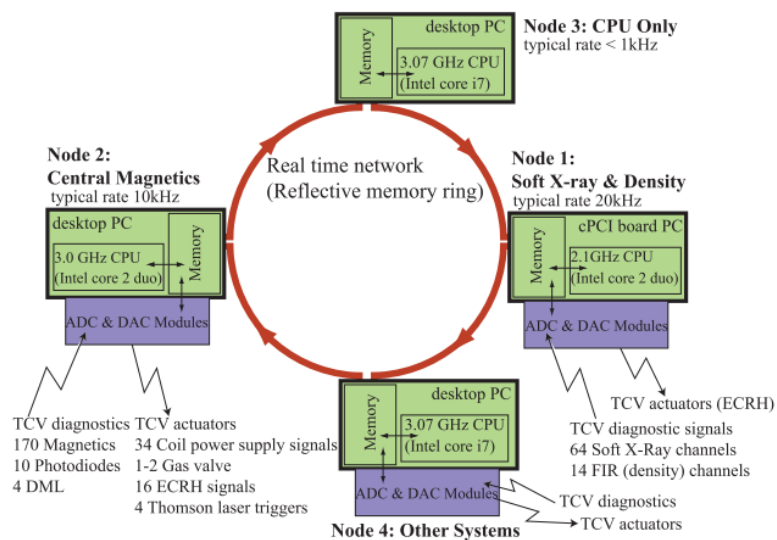


Figure 2.2.: TCV SCD. Real-time network nodes connection. The nodes configurations are shown together with the typical diagnostic and actuator systems to which they are connected [3].

2.2 MARTE FRAMEWORK

MARTE was developed in order to standardize general real-time control systems for the execution of control algorithms. MARTE framework is based on a multiplatform C⁺⁺ library. [4]

2.2.1 *MARTE architecture*

2.2.2 *Hardware containers*

2.2.3 *MARTE 2.0*

2.3 EQUILIBRIUM AND CONTROL ALGORITHMS

2.3.1 *PID control*

2.3.2 *Multiple-Input Multiple-Output control*

JT60-SA CONTROL DESIGN

3.1 MACHINE DESCRIPTION

3.2 CREATE TOOLS

3.3 CONTROLLER DESIGNS

3.4 QST TOOLS IMPLEMENTATION

3.5 SIMULATION RESULTS

ISTTOK

4.1 MACHINE DESCRIPTION

4.2 DIAGNOSTICS AND ACTUATORS

4.3 ATCA-MIMO-ISOL BOARDS

4.3.1 *Hardware layout*

4.3.2 *Real-time integration software*

4.4 PLASMA CURRENT MAGNETIC FIELD

Retrieving the contribution of the plasma current in tokamaks ...

The methods of correction of the magnetic error fields due to inaccuracies of tokamak manufacturing and assembly are considered. The problems of the plasma position and shape reconstruction based on magnetic field measurements are discussed.

4.5 PLASMA CENTROID POSITION DETERMINATION

ISTTOK RESULTS

5.1 IMPLEMENTATION OF THE GENERAL APPLICATION MODULES

5.1.1 *PID control implementation*

5.1.2 *Multiple-Input Multiple-Output control implementation*

5.2 RESULTS

5.2.1 *PID control and LQR control results*

CONCLUSIONS

bla bla bla

BIBLIOGRAPHY

- [1] J. R. Ferron, A. Kellman, E. McKee, T. Osborne, P. Petrach, T. S. Taylor, J. Wight, and E. Lazarus, "An advanced plasma control system for the diiii-d tokamak," in *[Proceedings] The 14th IEEE/NPSS Symposium Fusion Engineering*, pp. 761–764 vol.2, Sep. 1991.
- [2] A. A. K. Valerij A. Belyakov, *Fundamentals of Magnetic Thermonuclear Reactor Design*. Elsevier, 2018.
- [3] J. I. Paley, S. Coda, B. Duval, F. Felici, and J. M. Moret, "Architecture and commissioning of the TCV distributed feedback control system," *Conference Record - 2010 17th IEEE-NPSS Real Time Conference, RT10*, pp. 1–6, 2010.
- [4] A. C. Neto, D. Alves, L. Boncagni, P. J. Carvalho, D. F. Valcárcel, A. Barbalace, G. De Tommasi, H. Fernandes, F. Sartori, E. Vitale, R. Vitelli, and L. Zabeo, "A survey of recent MARTe based systems," in *IEEE Transactions on Nuclear Science*, vol. 58, pp. 1482–1489, 2011.

A

DEMONSTRATIONS
