ROADSENSE | Infrastructure Intelligence

DATE: November 08, 2026
STANDARD: ASTM D6433 / IRI

ASTM D6433 CONDITION	ROUGHNESS INDEX (IRI)	MATERIAL REQUIRED	ESTIMATED REPAIR BUDGET
100.0 / 100 **Good**	**1.2** m/km ASTM E1926	**0.0 kg** Cold-Mix Bitumen	**Rs. 0** ($0.0)

Hazard Classification & Severity Breakdown

Hazard Category	Impact Severity	Count	Recommended Municipal Action
Pothole	Severe (Z >= 3.0)	0	Immediate Cold Patching / Asphalt Mill & Infill (<48h)
Pothole	Moderate (Z 2.0-3.0)	0	Scheduled Maintenance (<14 days)
Pothole	Minor / Anomaly (Z < 2.0)	0	Surface Seal Coating / Monitor
Speedbreaker	Standard Deflection	0	Verify Regulatory Height & Signage Painting

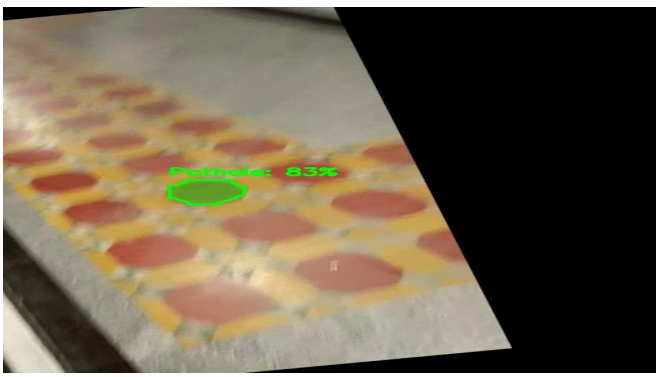
Priority Maintenance Dispatch Table (Top Critical Hazards)

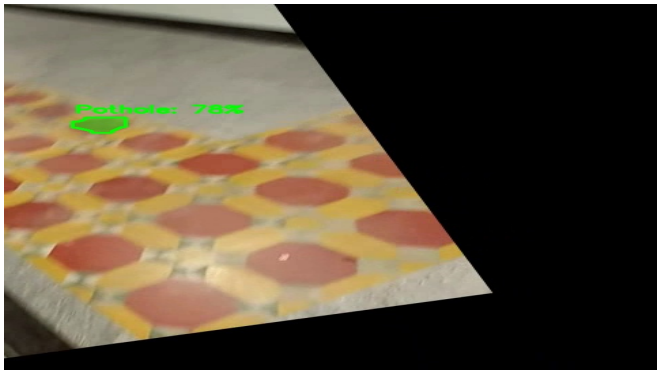
ID	Type	Severity	Latitude	Longitude	Dimensions	Bitumen Mass	Est. Budget	Action
—	None	—	—	—	—	—	—	No critical defects logged

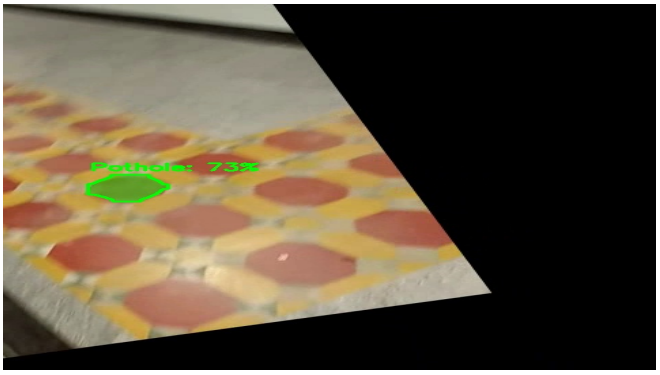
Camera Ground-Truth Evidence (AI Detection Bounding Boxes)

Visual verification frames captured by vehicle optical sensors at timestamp of impact.






Pothole: 78%


Pothole: 73%