


SAKSHI SUNIL HANAMSHETTI

LAB 6

PROGRAM 5

How to configure three routers using RIP protocol.

Topology:

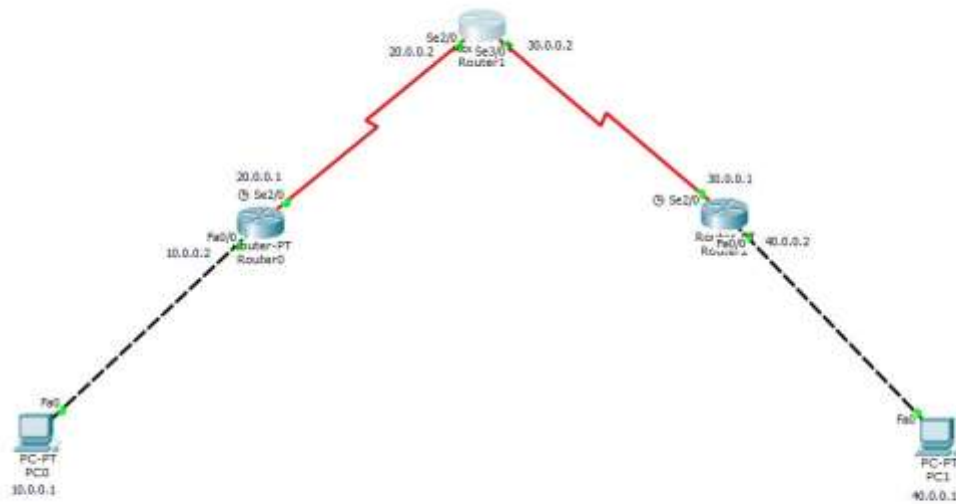

Result:

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.2

Pinging 40.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: Destination host unreachable.
Reply from 10.0.0.2: Destination host unreachable.
Reply from 10.0.0.2: Destination host unreachable.
Reply from 10.0.0.2: Destination host unreachable.

Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>ping 40.0.0.2

Pinging 40.0.0.2 with 32 bytes of data:

Reply from 40.0.0.2: bytes=32 time=12ms TTL=253
Reply from 40.0.0.2: bytes=32 time=11ms TTL=253
Reply from 40.0.0.2: bytes=32 time=8ms TTL=253
Reply from 40.0.0.2: bytes=32 time=13ms TTL=253

Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 13ms, Average = 11ms

PC>|
```