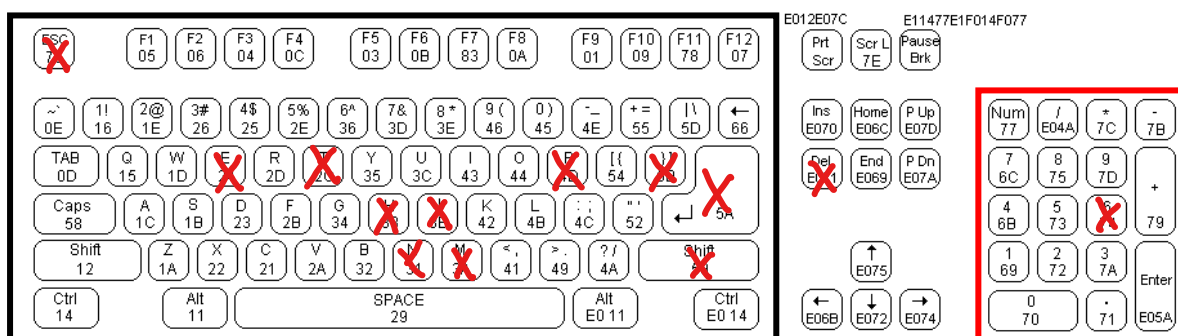# Lab 8: Keyboard (Calculator)

Objective

✓ Implement the keyboard function

Prerequisite

✓ Fundamentals of logic gates.
✓ Logic modeling in Verilog HDL.
✓ Keyboard control procedure

Experiments

[手寫註記: 放開 叙字 keep on the SSD]

1. Implement key board using the left-hand-side keyboard (inside the black blocks).
    1.1 Press 0/1/2/3/4/5/6/7/8/9 and show them in the seven-segment display. When a new number is pressed, the previous number is refreshed and overwritten.
    1.2 Press a/s/m (addition/subtraction/multiplication) and show them in the seven-segment display as your own defined A/S/M pattern. When you press "Enter", refresh (turn off) the seven-segment display. *[手寫註記: 其他不顯示]*

2. Implement a single digit decimal adder using the keyboard as the input and display the results on the 7-segment display (The first two digits are the addend/augend, and the last two digits are the sum). *[手寫註記: 按下第二個, 結果要馬上出來]*

3. Implement a two-digit decimal adder/subtractor/multiplier using the right-hand-side keyboard (inside the red block). You don't need to show all inputs and outputs at the same time in the 7-segment display. You just need to show inputs when they are pressed and show the results after "Enter" is pressed.

4. Implement the "Caps" control in the keyboard. When you press A-Z and a-z in the keyboard, the ASCII code of the pressed key (letter) is shown on 7-bit LEDs.

4.1 Press "Caps Lock" key to change the status of capital/lower case on the keyboard. Use a led to indicate the status of capital/lowercase in the keyboard and show the ASSCII code of the pressed key on 7-bit LEDs.

4.2 Implement the combinational keys. When you press "Shift" and the letter keys at the same time, 7-bit LEDs will show the ASCII code of the uppercase/lowercase of the pressed letter when the "Caps Lock" is at the lowercase/uppercase status.

Dec	Hx	Oct	Char		Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL	(null)	32	20	040	 	Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH	(start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX	(start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX	(end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT	(end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ	(enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK	(acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL	(bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS	(backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB	(horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF	(NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT	(vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF	(NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR	(carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO	(shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI	(shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE	(data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1	(device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2	(device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3	(device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4	(device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK	(negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN	(synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB	(end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN	(cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM	(end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	Y
26	1A	032	SUB	(substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC	(escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS	(file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174	|		
29	1D	035	GS	(group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS	(record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US	(unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com