



DRYWALL PROFILE

CATALOG

DETAILED INFORMATION

+237 6 90 12 11 35



www.batiprofiles.net



Catalog Content

1

Who Are We?

2

What Is a Drywall Profile?

3

UW Drywall Profile

4

CW Drywall Profile

5

L Drywall Profile

6

F Drywall Profile



BATI
PROFILS



BATI
PROFILS

WHO WE ARE ?

As Batı Profils, we are a brand that prioritizes quality and innovation in drywall production. Since our establishment, we have aimed to provide high-standard products to the construction industry, combining durability, aesthetics, and functionality.

In our modern production facilities, equipped with advanced technology and supported by our expert team, we develop tailored solutions to meet our customers' needs. We prioritize the use of eco-friendly and sustainable materials, ensuring the reliability and longevity of each product through rigorous quality control processes.

Our mission is to provide reliable and cost-effective solutions while delivering products that combine aesthetics and durability in the construction industry. We are here to build the structures of the future and take pride in being part of your success story.



BATI
PROFİLS

WHAT IS A DRYWALL PROFILE ?

Drywall profiles are widely used in the construction and decoration industries. Their primary applications include ventilation and air conditioning systems, thermal and sound insulation, as well as roof, facade, wall, and ceiling claddings.

In addition, they are commonly used in the construction of partition walls, cladding walls, and suspended ceiling systems, as well as in the production of support sheets for PVC profiles, prefabricated structural components, and prefabricated wall and ceiling claddings.

In reinforced concrete buildings, drywall profiles play a significant role not only in wall and ceiling claddings but also in providing decorative solutions, insulation applications, and interior designs for living and working spaces such as stores, offices, and hospitals.



BATI
PROFILS

UW (48 MM)


DRYWALL PROFILE

The UW-48 Wall Drywall Profile is one of the primary load-bearing elements used in interior partition walls, cladding walls, and shaft wall applications. This profile is positioned at the junction of the floor and ceiling within the system, forming the foundation of the wall framework. In partition wall applications, drywall panels are screwed onto both sides of the profiles, creating a double-sided cladding. In cladding wall applications, drywall is mounted on only one side of the profile. With its robust structure and easy installation, the UW-48 Wall Drywall Profile facilitates the creation of fast, practical, and durable wall systems.

DRYWALL PROFILE FEATURES (UW-48 DRYWALL PROFILE)

- Drywall partition walls are resistant to dynamic impacts due to their flexibility.
- They offer an easy solution for concealing installations. Their pH level matches that of the human body and they do not produce bacteria. They are economical.
- Load per m² for drywall partition walls: 35 kg/m²
- Load per m² for brick walls: 300 kg/m²
- Quick and easy assembly and disassembly save time and labor.
- Drywall partition walls do not cause space loss in buildings.
- Being 9 times lighter than brick walls, they increase the building's flexibility during earthquakes.
- Drywall partition walls provide excellent sound, heat, and fire insulation.
- Profiles can be manufactured in desired sizes according to project requirements.

Thickness (mm)	0,5 mm
Length (mm)	3000 mm
Dimensions	28 x 48 x 28 mm

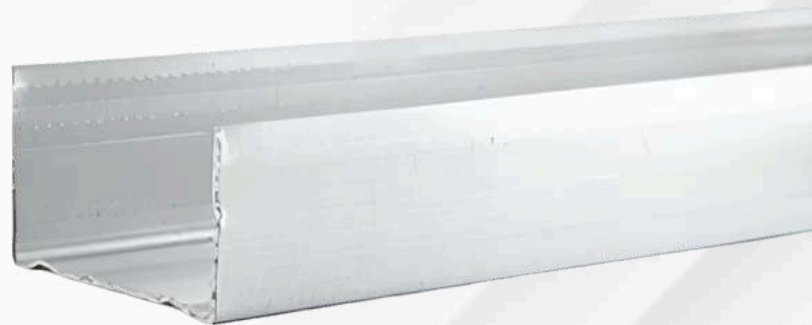

BATI
PROFILS

CW (46,5 MM)



DRYWALL PROFILE

The CW-46.5 Drywall Profile is a key structural element used in interior partition walls, cladding walls, and shaft wall applications. This profile is installed by fitting it into CW Wall Profiles, enhancing the durability of the wall framework. In partition wall applications, drywall panels are screwed onto both sides of the profiles, creating a double-sided cladding. With its sturdy structure and ease of installation, the CW-46.5 Drywall Profile enables the creation of durable, aesthetic, and practical wall systems in interior spaces.

DRYWALL PROFILE FEATURES (CW-46.5 WALL DRYWALL PROFILE)

- Drywall partition walls are resistant to dynamic impacts due to their flexibility.
- They offer an easy solution for concealing installations. Their pH level is identical to that of the human body and they do not produce bacteria. They are economical.
- Load per m² for drywall partition walls: 35 kg/m²
- Load per m² for brick walls: 300 kg/m²
- Quick and easy assembly and disassembly save time and labor.
- Drywall partition walls do not cause space loss in buildings.
- Being 9 times lighter than brick walls, they increase the building's flexibility during earthquakes.
- Drywall partition walls provide excellent sound, heat, and fire insulation.
- Profiles can be manufactured in desired sizes according to project requirements.

Thickness (mm)	0,5 mm
Length (mm)	3000 mm
Dimensions	34 x 46,5 x 34 mm

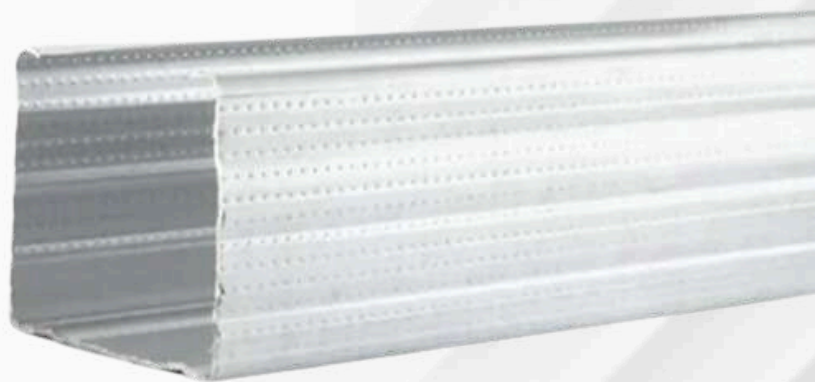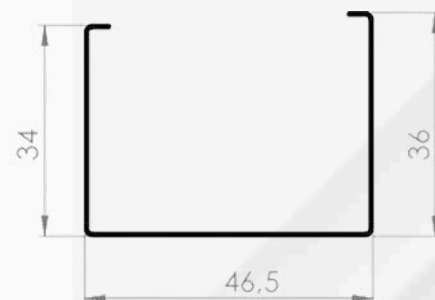

BATI
PROFILS

L (25 MM)


DRYWALL PROFILE

The Ceiling L Profile provides the metal support framework used in suspended ceiling applications in indoor spaces. During the installation of suspended drywall ceilings, this profile is mounted to the wall at the ceiling level, ensuring proper alignment and balance.

L DRYWALL PROFILE FEATURES (CEILING L DRYWALL PROFILE)

- It offers the ability to conceal installations, providing an aesthetic and organized appearance.
- Its pH level is compatible with the human body, ensuring safe use and preventing bacterial growth.
- It is an economical option, offering a cost-effective solution.
- Quick and easy assembly and disassembly save time and labor.
- Profiles can be produced in various sizes according to project requirements, offering flexibility.

Thickness (mm)	0,5 mm
Length (mm)	3000 mm
Dimensions	25 x 25 mm

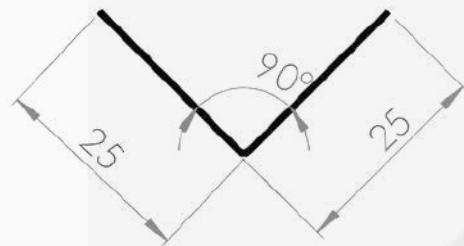

BATI
PROFILS


F (47 MM) DRYWALL PROFILE

This profile serves as the main load-bearing element for mounting drywall or cement boards to the ceiling. The F47 profile can also be used in the construction of wall claddings with bracket connections. These profiles contribute to the overall structural strength of buildings and are suitable for both indoor and outdoor applications.

F DRYWALL PROFILE FEATURES (F DRYWALL PROFILE)

F profiles are particularly preferred for additional partition walls, drywall systems, drywall supports, and continuous ceiling applications. These profiles not only ensure the flatness and rigidity of walls but also provide a support structure that prevents ceiling sagging. They play a critical role in ceiling systems, especially in securing covering materials such as omega profiles and drywall.

Thickness (mm)	0,5 mm
Length (mm)	3000 mm
Dimensions	47 x 17,5 x 6,2 x 2,5 mm

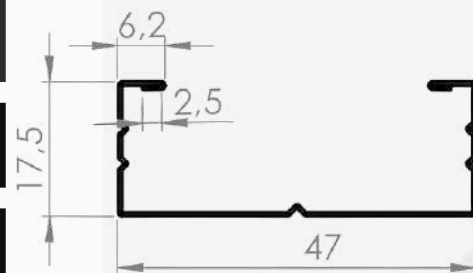

BATI
PROFILS



BATI
PROFILS



BATI
PROFILS



BATI
P R O F I L S

DETAILED INFORMATION



Rue prince de Galles Akwa-Douala-Cameroun



+237 6 90 12 11 35



info@batiprofils.net

