

Population Distributions of Footbridge Modal Properties: A PRISMA-Guided Review and Hierarchical Bayesian Analysis

Samadhi Loku Hetti Arachchilage^a, Colin Caprani^a, Stana Živanović^b

^a*Department of Civil Engineering, Monash University, Melbourne, Victoria, Australia*

^b*School of Engineering, University of Warwick, Coventry, United Kingdom*

Abstract

Keywords:

1. Introduction

The increasing adoption of light weight materials and slender structural forms has made modern footbridges more susceptible to human-induced vibrations. As a result, vibration serviceability under pedestrian loading has become an important design consideration to ensure acceptable structural performance and user comfort. Such assessment depends on several aspects of the bridge, including its structural form, material properties, and dynamic characteristics [1, 2, 3]. Therefore, prior knowledge or reliable estimation of key modal parameters is essential at the design stage, as these parameters provide an initial basis for assessing the feasibility of a proposed design [4, 5, 6, 7].

The current vibration serviceability codes and guidelines represent pedestrian loading through simplified load models to enable practical application at the design stage [8, 9, 10, 11, 12, 13, 14]. Since these load models are used to assess the vibration response of a wide range of footbridges, their adequacy should be evaluated in terms of the resulting structural response, rather than solely through how accurately they reproduce pedestrian loading.

The key limitation of many existing simplified load models is that pedestrians are represented as moving forces, with the corresponding load models calibrated without explicitly accounting for the dynamic interaction between the pedestrians and the supporting structure [15, 16, 17]. Human-structure interaction (HSI) alters the dynamic properties of the coupled pedestrian-structure system, and can lead to structural responses that differ substantially from those predicted by simplified load models. These effects can be

31 particularly important for lightweight structures and for cases with relatively
32 large pedestrian-to-structure mass ratios [18, 17]. Consequently, simplified
33 code models calibrated without accounting for HSI may exhibit systematic
34 response bias that varies with the dynamic characteristics of the bridge, mo-
35 tivating their reassessment and response-based recalibration.

36 Response-based calibration provides such a framework by comparing the
37 response predicted by the simplified design model with that obtained from ex-
38 perimental observations or a higher-fidelity reference model over a prescribed
39 range of structural properties. Previous studies have adopted this approach
40 by evaluating simplified pedestrian loading or vibration serviceability mod-
41 els over ranges of natural frequency, damping and other structural param-
42 eters [19, 3, 17, 18, 20]. However, these structural domains considered in
43 such studies have generally been defined using prescribed parameter ranges,
44 idealised structural configurations, or regularly sampled parameter combi-
45 nations rather than using the observed statistical distribution of dynamic
46 properties within the footbridge population. As a result, some structural
47 conditions may receive disproportionate importance in the calibration sim-
48 ply because of the adopted sampling scheme, rather than because they are
49 common in practice.

50 For code-model calibration, it is important to know not only the range
51 of structural properties that may occur, but also how common these proper-
52 ties are within the footbridge population. Several recent studies have made
53 valuable efforts to compile databases of footbridge characteristics and modal
54 properties. Oliveira et al. (2014) [21] reported fundamental frequencies
55 for 79 footbridges in Portugal, while Van Nimmen (2015) reviewed data
56 for more than 160 footbridges [22, 23]. Wei et al. (2019) [24] assembled
57 dynamic-property data for 138 footbridges, and Gong et al. (2024) [25]
58 more recently studied a collection of footbridges in China. These studies
59 provide a substantial starting point, but their datasets were assembled for
60 different purposes, report different properties, and include some of the same
61 bridges. Further observations are dispersed across many individual case stud-
62 ies [26, 6, 27, 20]. Consolidating these records, identifying duplicate bridges,
63 and recording which modal properties are available would provide a clearer
64 basis for estimating their observed distributions.

65 This study addresses the above gap in two stages. First, a systematic
66 literature search and screening procedure following the PRISMA framework
67 is used to identify relevant publications and compile bridge-level data on key
68 modal properties. Second, hierarchical Bayesian regression is used to proba-
69 bilistically characterise incompletely observed modal properties while retain-
70 ing the uncertainty associated with their estimation. The resulting database
71 provides a population-level description of key footbridge modal properties

and their relationships, allowing the prevalence of different combinations of natural frequency, damping ratio and modal mass to be quantified. Such information provides a statistical basis for distinguishing commonly occurring structural conditions from those that are comparatively rare. This, in turn, can support the selection and weighting of representative structural parameter combinations used in vibration-serviceability assessment and code-model calibration.

Accordingly, this study aims to characterise the modal properties of the footbridge population using a systematically assembled bridge-level database of approximately 250 structures. The principal contributions of the study are: (i) the systematic identification and consolidation of published footbridge dynamic-property data; (ii) the construction of a large, non-duplicated database of bridge-level modal properties; (iii) the probabilistic treatment of incompletely observed damping and modal-mass information using hierarchical Bayesian regression; and (iv) the population-level characterisation of modal properties relevant to vibration-serviceability assessment and code-model calibration.

2. Systematic database development

The footbridge database was developed through a systematic literature identification and screening process following the PRISMA framework [28]. The procedure includes publication identification, title and abstract screening, full text eligibility assessment, bridge level data extraction and consolidation of information into a single database. The following subsections describe the search and screening procedure, the data extraction process, and the resulting database.

2.1. Review scope and search strategy

The systematic review aimed to identify published investigations reporting structural and dynamic properties of full scale pedestrian bridges. The principal variables of interest were bridge span, deck width, fundamental vertical natural frequency, vertical damping ratio, Modal mass, structural form, cross section, and construction materials.

Scopus was selected as the literature database because of its broad coverage of peer-reviewed engineering research [29]. The candidate publications were identified using Elsevier Scopus search API through title, abstract, and keyword fields. The search used a broader combination of pedestrian-bridge terminology with terms relating to natural frequency, damping, and structural mass, experimental dynamic testing, ambient vibration testing, operational modal analysis, model updating and vibration serviceability.

110 The search returned 727 bibliographic records before deduplication. Dub-
111 plicate records were identified using DOI, Scopus EID. Following deduplica-
112 tion, 697 unique records were retained for screening. A DOI was available for
113 529 records, while Scopus EID were retained for publications without a DOI.
114 Scopus records were used to identify and screen publications, while numerical
115 bridge properties were extracted from the full texts of the eligible studies.

116 *2.2. Eligibility criteria*

117 Publications were considered eligible when they reported an investigation
118 of an existing, full-scale pedestrian bridge and contained experimentally mea-
119 sured or identified structural or modal properties that could be associated
120 with a specific structure. Studies based only on laboratory specimens, scaled
121 models, hypothetical structures, or purely numerical investigations were ex-
122 cluded. Publications were also excluded where the reported frequency could
123 not be identified as a structural vertical natural frequency relevant to the
124 present study. For inclusion in the bridge-level database, sufficient informa-
125 tion was required to identify the bridge and extract its fundamental vertical
126 natural frequency together with the geometric information required for the
127 population analysis. Damping ratio, modal mass, structural form, cross-
128 section, and construction material were extracted where available but were
129 not mandatory for inclusion.

130 *2.3. Study screening and bridge identification*

131 Following bibliographic deduplication, the 697 unique publications were
132 retained for full-text screening. The full-text documents were processed
133 using a semi-automated Python workflow. PDF text was extracted using
134 PyMuPDF and subsequently searched for evidence of full-scale pedestrian
135 bridge investigations and relevant structural and modal properties.

136 The extracted text was searched for bridge names and terminology as-
137 sociated with natural frequency, damping, modal mass, mode shapes, and
138 experimental vibration testing. Reference sections were excluded from the
139 search to reduce the likelihood of identifying bridges mentioned only in cited
140 literature.

141 During the screening stage, each publication was counted as a single
142 record, regardless of how many bridges it investigated. During data ex-
143 traction, however, each individual bridge was treated as a separate database
144 record. Consequently, a single publication could contribute data for several
145 bridges.

146 Each detected bridge was assigned a separate candidate record containing
147 its source publication, bridge identity, and associated structural and modal-
148 property evidence. Candidate records were subsequently reviewed against

the bridge-level inclusion requirements defined in Section 2.2 before consolidation.

2.4. Bridge-level data extraction and consolidation

For each candidate bridge, the extracted information included bridge name and location, span, deck width, fundamental vertical natural frequency, vertical damping ratio, modal mass, structural form, cross-section, and construction material. Numerical quantities were converted to consistent units before consolidation.

Because the same physical bridge could be reported in several publications, repeated bridge records were identified using bridge name, location, geometry, structural characteristics, reported modal properties, and source references. Potential matches across different publications were reviewed manually rather than being automatically removed.

Where several publications referred to the same physical bridge, the available information was consolidated into a single bridge-level record. The original experimental investigation was retained as the principal source where available, while additional information from later publications was incorporated where appropriate.

2.5. Resulting database and data completeness

Following bridge-level screening and duplicate reconciliation, 248 unique footbridges were retained in the final database. Fundamental vertical natural frequency and span were available for all bridges, while deck width was available for 240 bridges. Vertical damping ratios were reported for 102 bridges, whereas mass related information was considerably less complete, with modal mass information available for only 30 bridges and linear mass available for 25 bridges. Structural form and material information were available for all bridges, while cross-section information was available for 242 bridges. The resulting differences in data completeness, particularly for damping and mass-related properties, motivated the probabilistic treatment introduced in the following section.

3. Bayesian treatment of incomplete bridge data

The database contains complete records of fundamental vertical natural frequency and span, but damping and mass-related properties are reported for only a subset of bridges. Analysing only bridges with complete records would therefore exclude a substantial proportion of the database. To retain these bridges in the population analysis, Bayesian regression models were

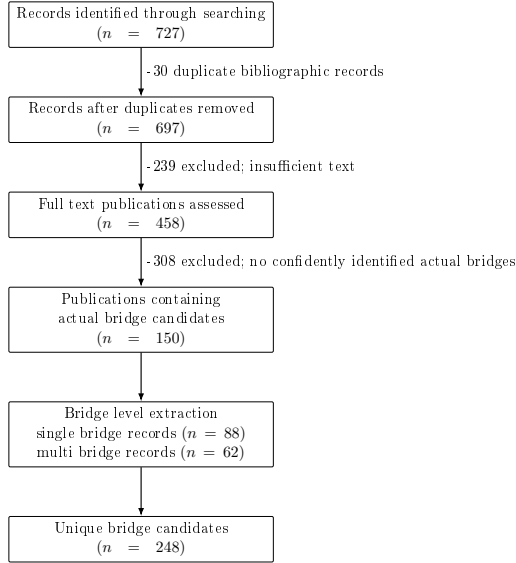


Figure 1: PRISMA flow diagram for the systematic identification, screening, and consolidation of footbridge data.

185 developed to infer the unreported properties from the available bridge char-
 186 acteristics. The missing values were represented by posterior predictive dis-
 187 tributions, allowing uncertainty in both regression parameters and remaining
 188 variability between bridges to be propagated into resulting population dis-
 189 tributions.

190 3.1. Hierarchical model for vertical damping ratio

191 Let ξ_i denote the damping ratio of the first vertical mode for the i -th
 192 bridge. The damping ratios ξ_i differ between bridges, reflecting differences
 193 in their construction materials, structural forms, and other factors. How-
 194 ever, the database does not provide sufficient details to model the physical
 195 mechanisms governing damping in each bridge. Statistical modelling offers a
 196 means of estimating unreported values from observed data without explicitly
 197 identifying the underlying mechanisms [30]. Accordingly, a Bayesian hier-
 198 archical regression model was fitted to the reported damping ratios, using
 199 natural frequency, span, and material as predictors that are available in the
 200 database. The fitted model was then used to obtain posterior predictive dis-
 201 tributions for unreported damping ratios, accounting for both uncertainty in
 202 the regression parameters and remaining variability between bridges.

203 For each bridge, the available predictor information is $x_i = \{f_i, L_i, m_i\}$,
 204 where f_i is the fundamental vertical natural frequency, L_i is the span, and
 205 m_i denotes the material category. Let $\mathcal{O}$ and $\mathcal{M}$ denote the sets of bridges

with observed and missing damping ratios, respectively. The data used to estimate the model parameters are then

$$\mathcal{D}_{\text{obs}} = \{(\xi_i, \mathbf{x}_i) : i \in \mathcal{O}\}. \quad (1)$$

Damping ratios were modelled using a lognormal distribution to ensure positive predictions, with the corresponding log damping ratios assumed to follow a normal distribution:

$$\log \xi_i \mid \eta_i, \sigma \sim \mathcal{N}(\eta_i, \sigma^2), \quad (2)$$

where η_i is the conditional mean of log damping ratio and σ describes the remaining variability between bridges. The conditional mean was expressed as

$$\eta_i = \alpha + \beta_f x_{f,i} + \beta_L x_{L,i} + a_{m_i}, \quad (3)$$

where α is the common intercept, β_f and β_L describe the associations with natural frequency and span, and a_{m_i} is the effect of the material category of bridge i . The predictors f_i and L_i were logarithmically transformed and standardised as,

$$x_{f,i} = \frac{\log f_i - \overline{\log f}}{s_{\log f}}, \quad x_{L,i} = \frac{\log L_i - \overline{\log L}}{s_{\log L}}. \quad (4)$$

Here, the overbars and s denote the means and standard deviations of the corresponding log-transformed predictors.

The material categories contain different numbers of observed damping ratios. Estimating an independent model for each category would therefore provide limited information for sparsely represented materials. Instead, material effects were assigned a shared distribution,

$$a_m \mid \sigma_{\text{mat}} \sim \mathcal{N}(0, \sigma_{\text{mat}}^2). \quad (5)$$

This hierarchical structure allows information to be partially pooled across materials while retaining differences between categories. The parameter σ_{mat} controls the variation in material effects around the common baseline.

Let $\boldsymbol{\theta}$ contain the regression coefficients, material effects, and dispersion parameters:

$$\boldsymbol{\theta} = \{\alpha, \beta_f, \beta_L, \mathbf{a}, \sigma, \sigma_{\text{mat}}\}. \quad (6)$$

Assuming conditional independence between bridge records, the likelihood of the observed log damping ratios is

$$\mathcal{L}(\mathcal{D}_{\text{obs}} \mid \boldsymbol{\theta}) = \prod_{i \in \mathcal{O}} \mathcal{N}(\log \xi_i \mid \eta_i, \sigma^2). \quad (7)$$

231 The posterior distribution follows from Bayes' rule:

$$p(\boldsymbol{\theta} \mid \mathcal{D}_{\text{obs}}) \propto \mathcal{L}(\mathcal{D}_{\text{obs}} \mid \boldsymbol{\theta})p(\boldsymbol{\theta}). \quad (8)$$

232 For a bridge with unreported damping, its known predictors were used to
233 obtain the posterior predictive distribution:

$$p(\xi_i \mid \mathbf{x}_i, \mathcal{D}_{\text{obs}}) = \int p(\xi_i \mid \mathbf{x}_i, \boldsymbol{\theta})p(\boldsymbol{\theta} \mid \mathcal{D}_{\text{obs}}) \mathrm{d}\boldsymbol{\theta}, \quad i \in \mathcal{M}. \quad (9)$$

234 This distribution accounts for both uncertainty in the model parameters and
235 the remaining variability between bridges. Samples from these distributions
236 were used to represent the missing damping ratios in the subsequent popu-
237 lation analysis.

238 3.2. Bayesian estimation of pedestrian-to-structure mass-ratio probabilities

239 The pedestrian-to-structure mass ratio depends on both the bridge modal
240 properties and the distribution of pedestrians. The present analysis therefore
241 considers the prevalence of mass ratios at a specified pedestrian density ρ .

242 For bridge i , assuming pedestrians are uniformly distributed over the
243 occupied deck area A_i , the pedestrian modal mass associated with the first
244 vertical mode is

$$M_{p,i}^*(\rho) = \rho \bar{m}_p \int_{A_i} \phi_i^2(\mathbf{x}) \mathrm{d}A, \quad (10)$$

245 where $\bar{m}_p$ is the assumed mean pedestrian mass and ϕ_i is the corresponding
246 mode shape. The pedestrian-to-structure modal mass ratio is then,

$$\mu_i(\rho) = \frac{M_{p,i}^*(\rho)}{M_{b,i}^*}, \quad (11)$$

247 where $M_{b,i}^*$ is the bridge modal mass evaluated using the same mode-shape
248 normalisation.

249 3.3. Posterior sampling and model assessment

250 4. Results

251 4.1. Database characteristics and observed distributions

252 4.2. Damping-model assessment and inferred damping distribution

253 4.3. Mass-model assessment and inferred mass-ratio distribution

254 4.4. Joint prevalence of serviceability-relevant properties

255 5. Discussion

256 6. Conclusions

257 7. Acknowledgements

258 This research is supported by an Australian Government Research Train-
259 ing Program (RTP) stipend Scholarship and Monash International Tuition

260 Scholarship (MITS).

261 References

- 262 [1] E. Ahmadi, C. Caprani, S. Živanović, N. Evans, A. Heidarpour, A frame-
263 work for quantification of human-structure interaction in vertical direc-
264 tion, *Journal of Sound and Vibration* 432 (2018) 351–372.
- 265 [2] E. Ahmadi, C. Caprani, S. Živanović, A. Heidarpour, Assessment of
266 human-structure interaction on a lively lightweight gfrp footbridge, *En-
267 gineering Structures* 199 (2019) 109687.
- 268 [3] E. Ahmadi, C. Caprani, S. Živanović, A. Heidarpour, Experimental val-
269 idation of moving spring-mass-damper model for human-structure in-
270 teraction in the presence of vertical vibration, in: *Structures*, Vol. 29,
271 Elsevier, 2021, pp. 1274–1285.
- 272 [4] S. Živanović, A. Pavic, P. Reynolds, Finite element modelling and up-
273 dating of a lively footbridge: The complete process, *Journal of Sound
274 and Vibration* 301 (1-2) (2007) 126–145.
- 275 [5] K. Van Nimmen, G. Lombaert, G. De Roeck, P. Van den Broeck, Vi-
276 bration serviceability of footbridges: Evaluation of the current codes of
277 practice, *Engineering Structures* 59 (2014) 448–461.
- 278 [6] A. Tadeu, A. Romero, S. Dias, F. Pedro, M. Brett, M. Serra, P. Galvín,
279 F. Bandeira, Vibration serviceability assessment of the world’s longest
280 suspended footbridge in 2020, in: *Structures*, Vol. 44, Elsevier, 2022,
281 pp. 457–475.
- 282 [7] T. P. Reynolds, T. Glashier, J. Cameron, R. Kromanis, P. Zhang,
283 Z. Wynne, A. Tessier, A. Shuldiner, S. Cammers-Goodwin, F. Vah-
284 datikhaki, et al., Operational data collection and analysis for a smart
285 3d-printed footbridge, *Smart and Sustainable Built Environment* (2025)
286 1–29.
- 287 [8] British Standards Institution, UK National Annex to Eurocode 1: Ac-
288 tions on Structures – Part 2: Traffic Loads on Bridges (2008).
- 289 [9] C. E. C. for Standardization), EN 1991-2:2023 Eurocode 1 — Actions on
290 structures — Part 2: Traffic loads on bridges and other civil engineering
291 works (2023).

- 292 [10] Ministry of Housing and Urban-Rural Development of the People’s Re-
293 public of China, Technical standard for human comfort of the floor vi-
294 bration (2019).
- 295 [11] Beijing Municipal Engineering Research Institute, Technical specifica-
296 tion for urban pedestrian overcrossing and underpass, Tech. Rep. CJJ
297 69-201X, Beijing, China, draft for comments (2017).
- 298 [12] Fédération Internationale du Béton, Guidelines for the design of foot-
299 bridges, Tech. Rep. Bulletin No. 32, Fédération Internationale du Béton,
300 Stuttgart, Germany (2005).
- 301 [13] SétraGuide Methodologique Passerelles Pietonnes (Technical Guide
302 Footbridges: Assessment of Vibrational Behaviour of Footbridges Under
303 Pedestrian Loading), Sétra, France, 2006.
- 304 [14] M. Feldman, Hivoss—human-induced vibrations of steel structures, Of-
305 fice for Official Publications of the European Communities, Luxembourg
306 (2008).
- 307 [15] C. C. Caprani, E. Ahmadi, Formulation of human–structure interaction
308 system models for vertical vibration, *Journal of Sound and Vibration*
309 377 (2016) 346–367.
- 310 [16] E. Shahabpoor, A. Pavic, V. Racic, Interaction between walking hu-
311 mans and structures in vertical direction: A literature review, *Shock*
312 and vibration 2016 (1) (2016) 3430285.
- 313 [17] K. Van Nimmen, G. Lombaert, G. De Roeck, P. Van den Broeck, The
314 impact of vertical human-structure interaction on the response of foot-
315 bridges to pedestrian excitation, *Journal of Sound and Vibration* 402
316 (2017) 104–121.
- 317 [18] K. Van Nimmen, A. Pavic, P. Van den Broeck, A simplified method to
318 account for vertical human-structure interaction, in: *Structures*, Vol. 32,
319 Elsevier, 2021, pp. 2004–2019.
- 320 [19] E. Bassoli, K. Van Nimmen, L. Vincenzi, P. Van den Broeck, A spectral
321 load model for pedestrian excitation including vertical human-structure
322 interaction, *Engineering structures* 156 (2018) 537–547.
- 323 [20] S. Strobbe, P. Van den Broeck, W. De Corte, K. Van Nimmen, Vi-
324 bration serviceability assessment of footbridges: Extending the applica-
325 tion range of current design guides, *Engineering Structures* 350 (2026)
326 121814.

- 327 [21] C. Oliveira, Fundamental frequencies of vibration of footbridges in por-
328 tugal: from in situ measurements to numerical modelling, *Shock and*
329 *Vibration* 2014 (1) (2014) 925437.
- 330 [22] K. Van Nimmen, Numerical and experimental study of human-induced
331 vibrations of footbridges, Phd thesis, KU Leuven (2015).
- 332 [23] E. Zäll, Footbridge dynamics: Human-structure interaction, Licentiate
333 thesis, KTH Royal Institute of Technology, Stockholm, Sweden (2018).
- 334 [24] X. Wei, J. Russell, S. Živanović, J. T. Mottram, Measured dynamic prop-
335 erties for frp footbridges and their critical comparison against structures
336 made of conventional construction materials, *Composite Structures* 223
337 (2019) 110956.
- 338 [25] M. Gong, R. Shen, S. Song, X. Wei, Basic characteristics and vibration-
339 serviceability-related properties of recent footbridges in china, *Journal*
340 *of Vibration Engineering & Technologies* 12 (7) (2024) 8437–8450.
- 341 [26] S. Živanović, A. Pavic, P. Reynolds, Human–structure dynamic interac-
342 tion in footbridges, in: *Proceedings of the institution of civil engineers-*
343 *bridge engineering*, Vol. 158, Emerald Publishing, 2005, pp. 165–177.
- 344 [27] K. Lievens, G. Lombaert, G. De Roeck, P. Van den Broeck, Robust de-
345 sign of a tmd for the vibration serviceability of a footbridge, *Engineering*
346 *Structures* 123 (2016) 408–418.
- 347 [28] M. J. Page, J. E. McKenzie, P. M. Bossuyt, I. Boutron, T. C. Hoffmann,
348 C. D. Mulrow, L. Shamseer, J. M. Tetzlaff, E. A. Akl, S. E. Brennan,
349 et al., The prisma 2020 statement: an updated guideline for reporting
350 systematic reviews, *bmj* 372 (2021).
- 351 [29] J. F. Burnham, Scopus database: a review, *Biomedical digital libraries*
352 3 (1) (2006) 1.
- 353 [30] R. McElreath, *Statistical rethinking: A Bayesian course with examples*
354 *in R and Stan*, Chapman and Hall/CRC, 2018.