


Solution TD3

Exercise 1

The diagram below shows two residential networks with routers that implement NAT and a remote server with a public internet address

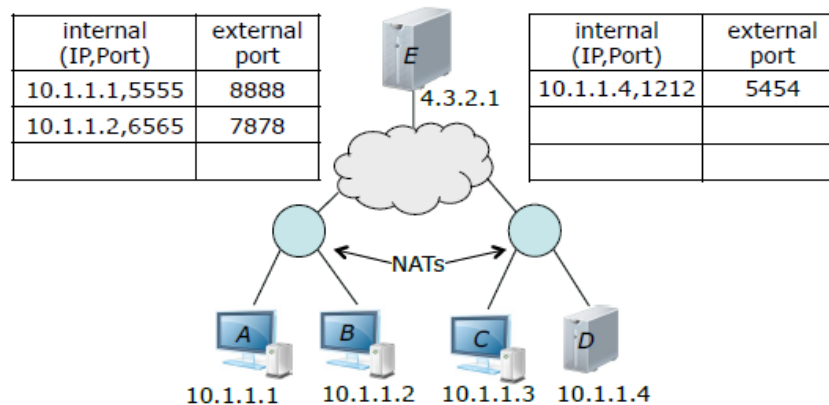

The packet header diagrams below are for a packet from a host in the left-hand network, going to the server. The first shows the header when the packet arrives at the router, the second shows it when the packet leaves the router. Add an entry to the left-hand NAT table that is consistent with these two packet headers.

src adr	dest adr	src port	dest port
10.1.1.1	4.3.2.1	5555	3333
3.7.5.7	4.3.2.1	8888	3333

What is the public IP address of the left-hand router?

Answer: 3.7.5.7

The three header diagrams below are for a packet from a host in the right-hand network, going to a host in the left-hand network. Fill in the blank fields. Add entries to the two NAT tables that are consistent with this sequence of packet headers.

src adr	dest adr	src port	dest port
10.1.1.4	3.7.5.7	1212	7878
5.3.5.2	3.7.5.7	5454	7878
5.3.5.2	10.1.1.2	5454	6565

What is the public IP address of the right-hand router?

5.3.5.2

In the diagrams below, fill in the header fields that would be used by a response to the last packet, (the response goes from the right hand network to the left).

src adr	dest adr	src port	dest port
10.1.1.2	5.3.5.2	6565	5454

Solution TD3

3.7.5.7	5.3.5.2	7878	5454
3.7.5.7	10.1.1.4	7878	1212

Exercise 2

Figure 2 illustrates how Network Address Translation (NAT) works. Consider a similar topology, but suppose that the NAT gateway has external IP address 24.34.112.235, while the private IP address space is 192.168.1.0/24.


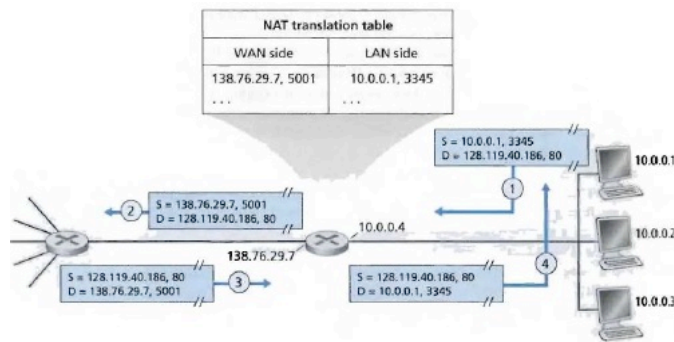


Figure 2: Network Address Translation (NAT) Process

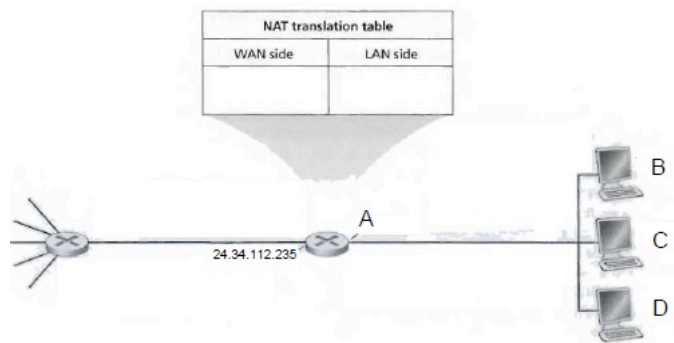

- a) Complete Figure 3 by assigning IP addresses to all interfaces (labels A, B, C, and D) in the internal (private) network.

Router interface: 192.168.1.1

Home device addresses: 192.168.1.2, 192.168.1.3, 192.168.1.4

- b) Suppose that each end-system has two ongoing TCP connections, all to IP address 128.119.40.86, port 80. Provide the six corresponding entries in the NAT translation table.

Here is an example of a NAT translation table. Multiple solutions exist

WAN Side	LAN Side
24.34.112.235, 4000	192.168.1.2, 3345
24.34.112.235, 4001	192.168.1.2, 3346
24.34.112.235, 4002	192.168.1.3, 3445
24.34.112.235, 4003	192.168.1.3, 3446

Solution TD3

24.34.112.235, 4004	192.168.1.4, 3545
24.34.112.235, 4005	192.168.1.4, 3546

Exercise 3

A network address translation system uses a public address to offer Internet access to 15 workstations. What is the maximum number of TCP connections on port 80 of the Web server 128.178.50.137 (which is outside the internal network) that can be supported by the NAT?

Number of ports possible = $2^{16}=65536$

Exercise 4

Let us assume a router has a single public address 138.76.29.7 which it uses for all communication with hosts that are not part of the private network. The router multiplexes its public IP address(es) as needed and keeps track of the multiplexing in a NAT translation table.

Assume that the router multiplexes the public address using ports starting from 8000 and then incrementing by one. For example, if a host in the private network with address 10.0.0.5:5000 sends a message to 132.239.8.45:80 then the entry in the NAT table would be filled in as below. The next time the router will use 8001 as the port to establish a new connection and so on.

What would be the entries in the NAT Translation Table at the end of the following events

- i. 10.0.0.6:5000 sends a message to 74.125.239.33:80
- ii. 10.0.0.10:6000 sends a message to 204.79.197.200:80
- iii. 10.0.1.101:6001 sends a message to 206.190.36.45:80
- iv. 10.0.0.10:6000 sends another message to 204.79.197.200:80
- v. 10.0.1.101:6001 sends a message to 74.125.239.33:80
- vi. 10.0.0.7:7000 sends a message to 63.245.215.20:80
- vii. 204.79.197.200:80 sends a message to 10.0.0.10:6000
- viii. 206.190.36.45:80 sends a message to 74.125.239.33:80

NAT Translation Table	
WAN Side Address	LAN Side Address
138.76.29.7:8000	10.0.0.5:5000
138.76.29.7:8001	10.0.0.6:5000
138.76.29.7:8002	10.0.0.10:6000
138.76.29.7:8003	10.0.1.101:6001
138.76.29.7:8004	10.0.0.7:7000

Note: iv, v, vii, viii will not create any new entries