EXP NO: 9

DESIGN A SIMPLE TOPOLOGY AND CONFIGURE ONE ROUTER, TWO SWITCHES, AND PCs USING CISCO PACKET TRACER

AIM:

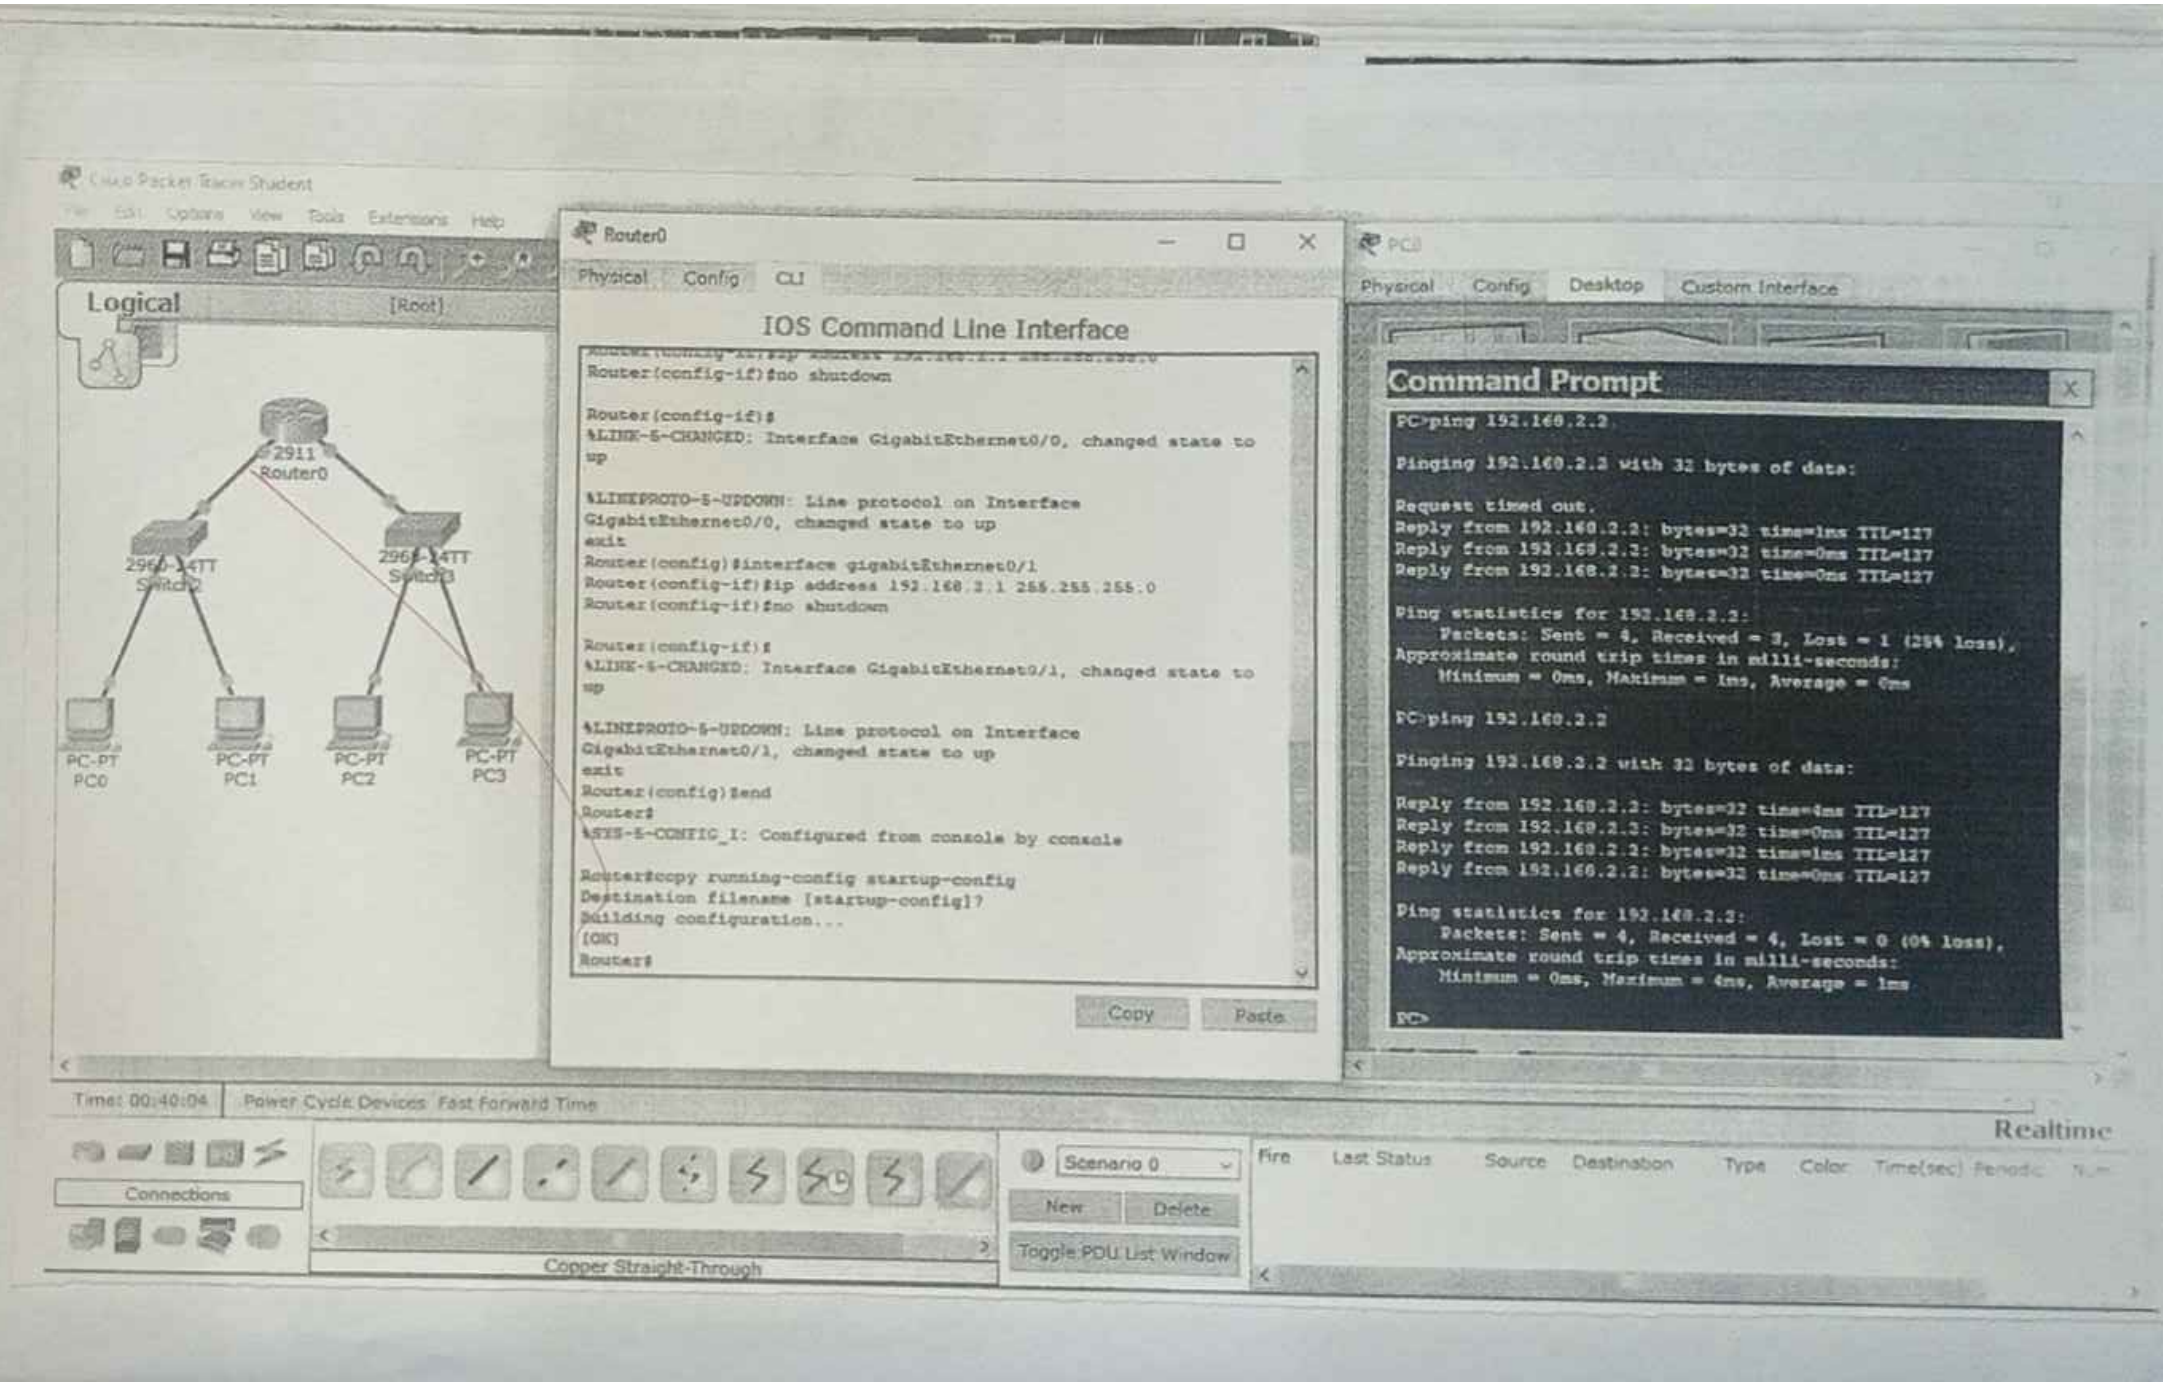
To design and configure a simple network topology consisting of one router, two switches, 4PCs & cisco packet tracer & verify communication between all devices

PROCEDURE:

* Step 1: open cisco Packet Tracer & Add Devices
* Step 2: connect the devices & open router CLI
* Step 3: configure Interface G0/0, PC0, PC1, PC2, PC3
* Step 4: Test connectivity

RESULT:

Thus, The design to configure a simple network topology executed successfully


Logical
[Root]
2911
Router0
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Router0
Physical
Config
CLI
IOS Command Line Interface
Router(config-if)$no shutdown
Router(config-if)$
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)$interface gigabitEthernet0/1
Router(config-if)$ip address 192.168.2.1 255.255.255.0
Router(config-if)$no shutdown
Router(config-if)$
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)$end
Router$
%SYS-5-CONFIG_I: Configured from console by console
Router$copy running-config startup-config
Destination filename [startup-config]?
%Building configuration...
[OK]
Router$
Copy
Paste
PC0
Physical
Config
Desktop
Custom Interface
Command Prompt
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.2.2: bytes=32 time=4ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
PC>
Time: 00:40:04
Power Cycle Devices
Fast Forward Time
Realtime
Connections
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic