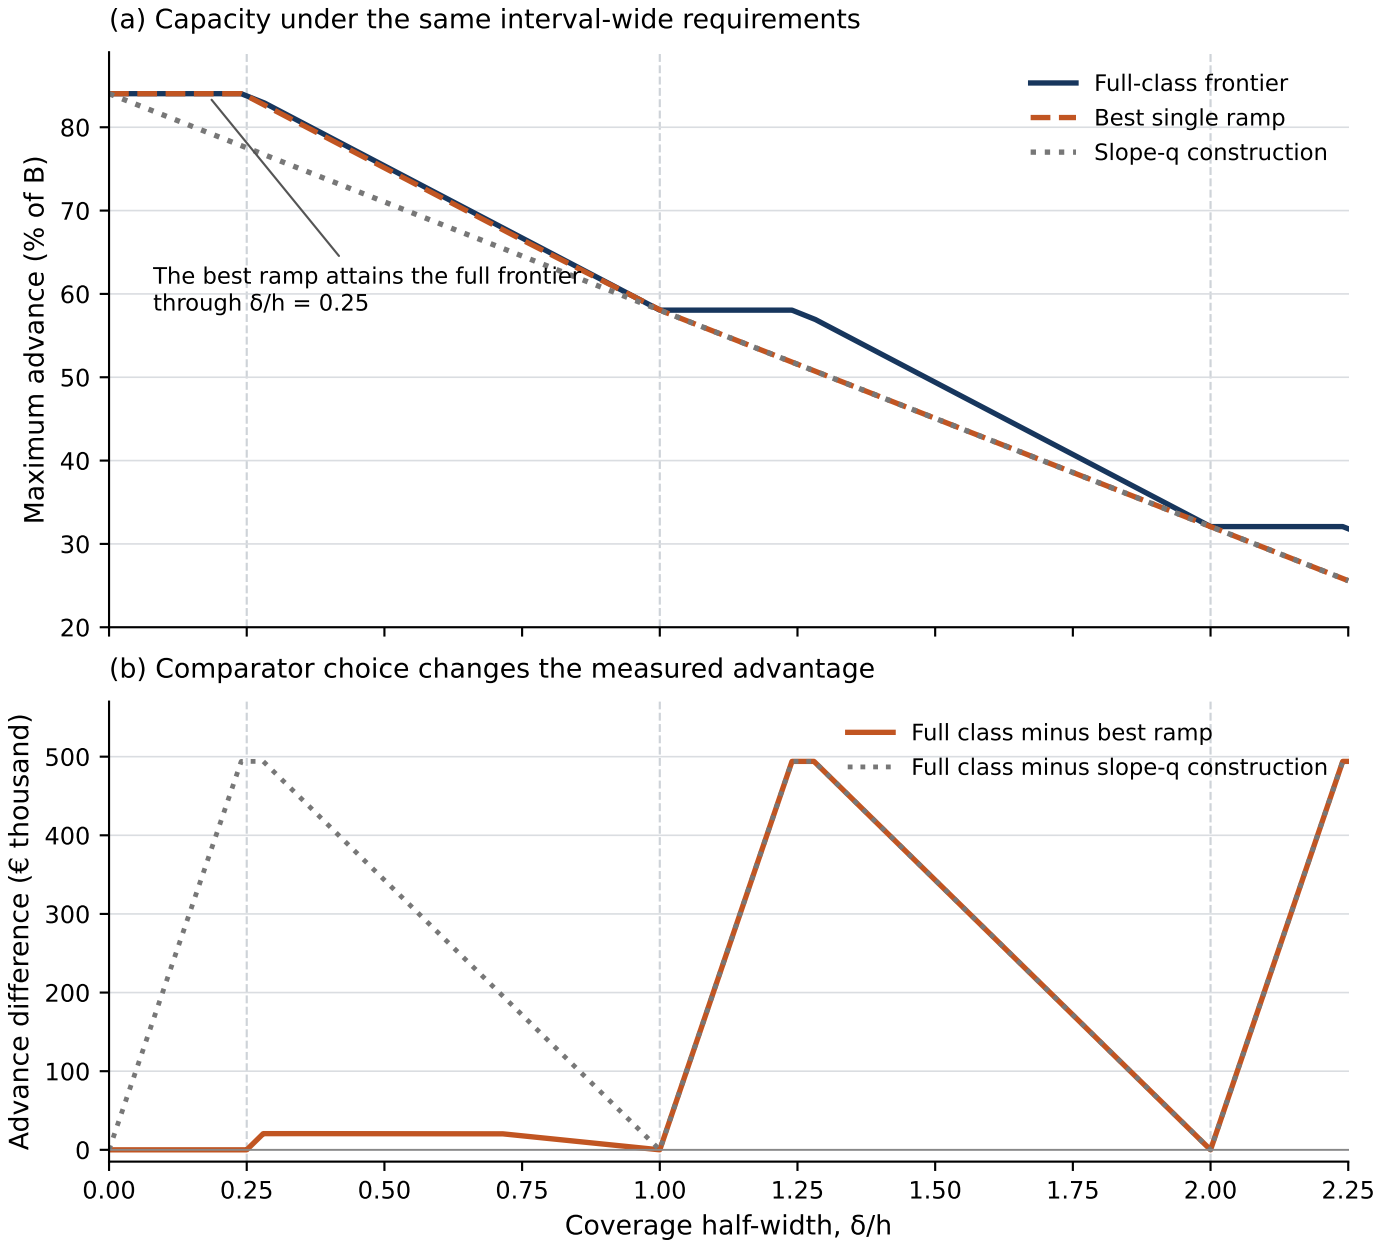
(a) Capacity under the same interval-wide requirements
Maximum advance (% of B)
80
70
60
50
40
30
20
Full-class frontier
Best single ramp
Slope-q construction
The best ramp attains the full frontier
through δ/h = 0.25
(b) Comparator choice changes the measured advantage
Advance difference (€ thousand)
500
400
300
200
100
0
Full class minus best ramp
Full class minus slope-q construction
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
2.25
Coverage half-width, δ/h