


ECA1411-EMBEDDED SYSTEM

LAB MANUAL

Exp No: 6 ARDUINO BASED MANUAL ELECTRONIC COUNTER USING PROTEUS

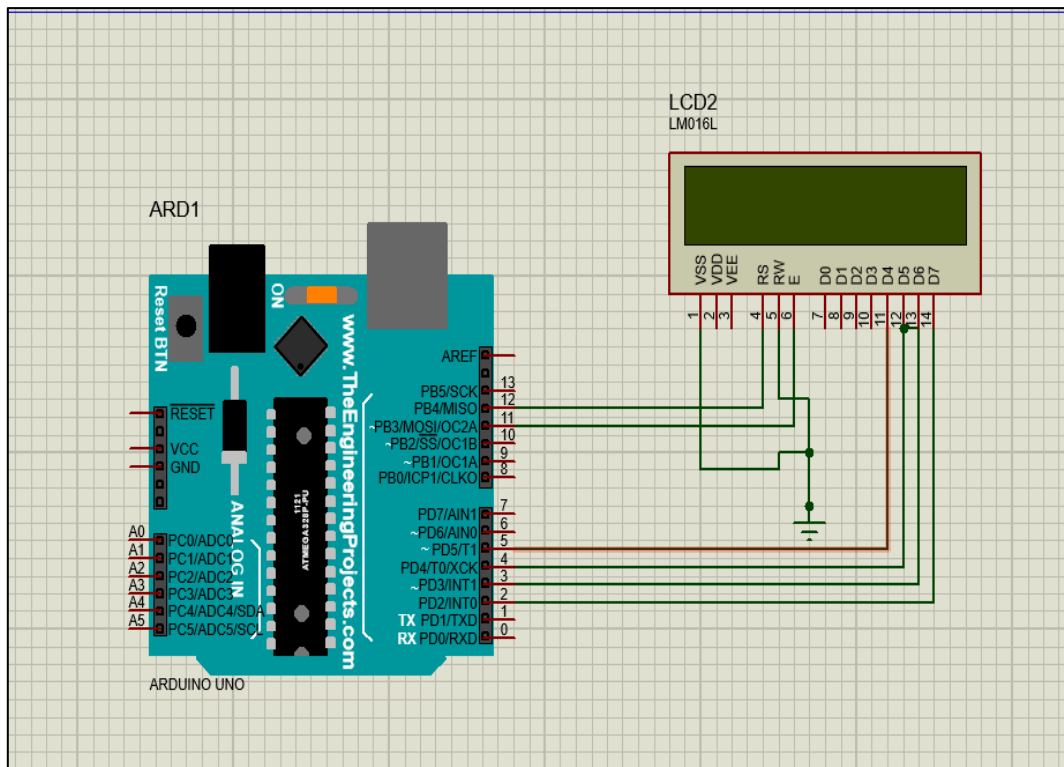

```
EXP6 | Arduino IDE 2.3.10
File Edit Sketch Tools Help
Arduino UNO
EXP6.ino
1 #include <LiquidCrystal.h>
2
3 // Initialize the library by associating any needed LCD interface pins
4 // LCD Pins: RS, Enable, D4, D5, D6, D7
5 // Arduino Pins: 12, 11, 5, 4, 3, 2
6
7 LiquidCrystal lcd(12, 11, 5, 4, 3, 2);
8
9 void setup() {
10
11 // Set up the LCD's number of columns and rows
12 lcd.begin(16, 2);
13
14 // Print the initial message to the LCD
15 lcd.print("hello world!");
16 }
17
18 void loop() {
19
20 // Scroll 13 positions to the left to move the text off-screen completely
21 for (int i = 0; i < 13; i++) {
22
23 lcd.scrollDisplayLeft();
24
25 delay(700); // 700 ms delay between each scroll step
26 }
27
28 // Optional pause before restarting
29 delay(1000);
30 }
31
Output
Sketch uses 1840 bytes (5%) of program storage space. Maximum is 32256 bytes.
Global variables use 51 bytes (2%) of dynamic memory, leaving 1997 bytes for local variables. Maximum is 2048 bytes.
```