


ECA1411-EMBEDDED SYSTEM

LAB MANUAL


Exp No:16- EMBEDDED C PROGRAM TO CONVERT THE HEXADECIMAL DATA 0XCFH TO DECIMAL AND DISPLAY THE DIGITS ON PORTS P0, P1 AND P2

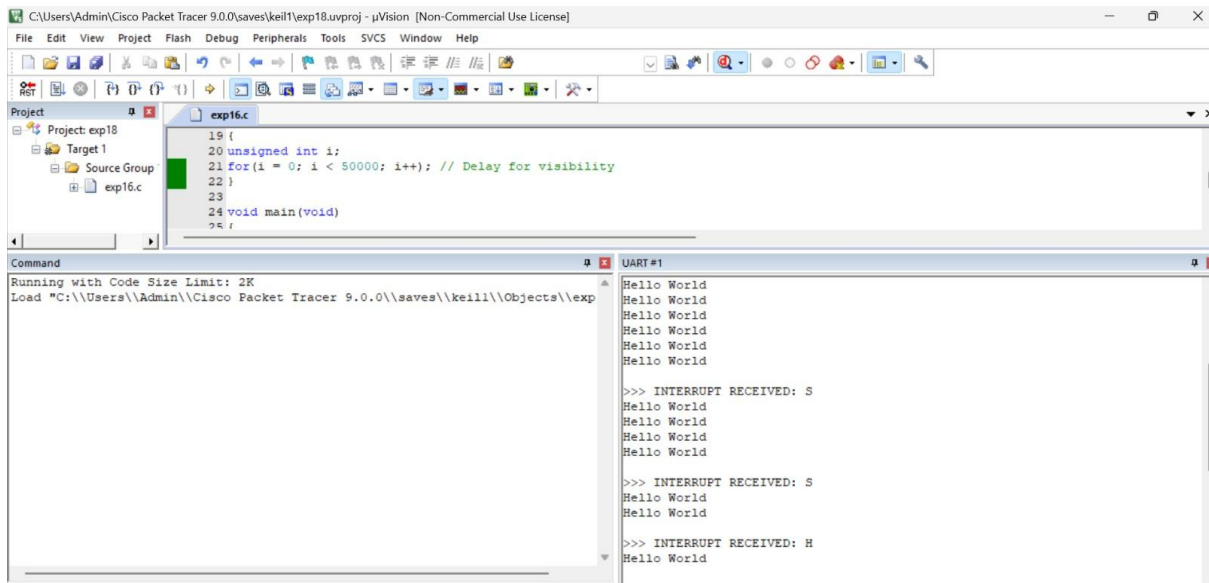

```
19 {
20 unsigned int i;
21 for(i = 0; i < 50000; i++); // Delay for visibility
22 }
23
24 void main(void)
25 {
```

Command: Running With Code Size Limit: 2K
Load "C:\Users\Admin\Cisco Packet Tracer 9.0.0\saves\keill\Objects\exp18.uvproj"

UART #1: Hello World
Hello World
Hello World
Hello World
Hello World
Hello World
>>> INTERRUPT RECEIVED: S
Hello World
Hello World
Hello World
Hello World
>>> INTERRUPT RECEIVED: S
Hello World
Hello World
Hello World
>>> INTERRUPT RECEIVED: H
Hello World

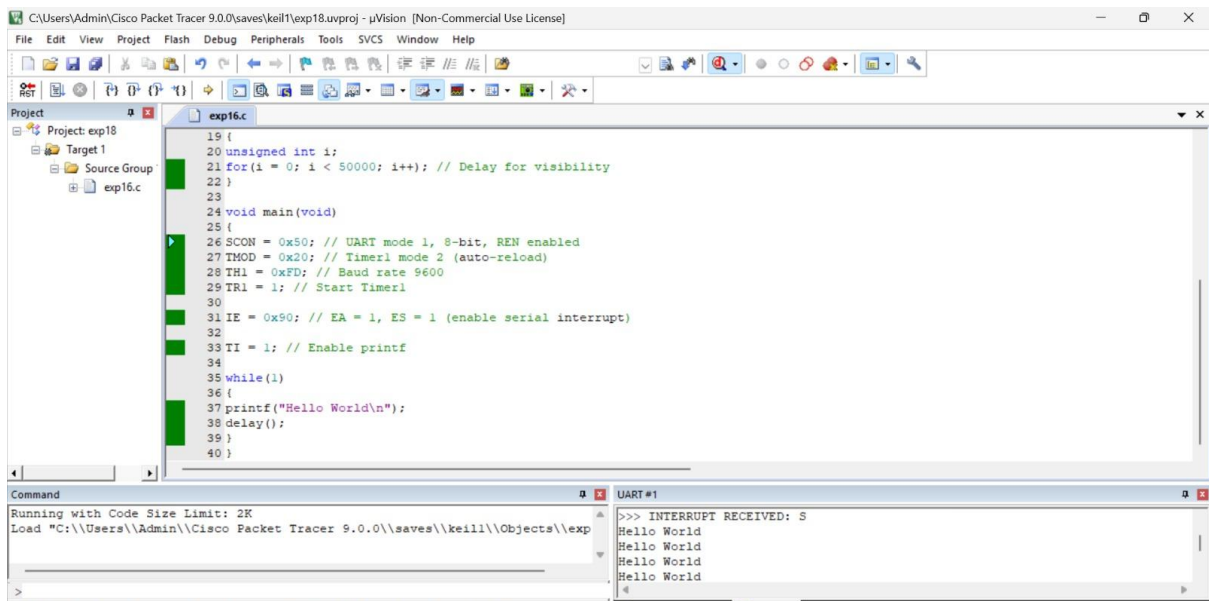

```
19 {
20 unsigned int i;
21 for(i = 0; i < 50000; i++); // Delay for visibility
22 }
23
24 void main(void)
25 {
26 SCON = 0x50; // UART mode 1, 8-bit, REN enabled
27 TMOD = 0x20; // Timer1 mode 2 (auto-reload)
28 TH1 = 0xFD; // Baud rate 9600
29 TR1 = 1; // Start Timer1
30
31 IE = 0x90; // EA = 1, ES = 1 (enable serial interrupt)
32
33 TI = 1; // Enable printf
34
35 while(1)
36 {
37 printf("Hello World\n");
38 delay();
39 }
40 }
```

Command: Running With Code Size Limit: 2K
Load "C:\Users\Admin\Cisco Packet Tracer 9.0.0\saves\keill\Objects\exp18.uvproj"

UART #1: >>> INTERRUPT RECEIVED: S
Hello World
Hello World
Hello World