

Grid Application Distance Measurement Test Report

Test Report Number: LLIA002905-002

Catalog Number: Helio Glow - All Channels 100% - No Pulsing

Portable, formed steel housing with three HYX-F8025M internal cooling fans,
one aluminum heatsink behind LEDs

216 LEDs, 84 Red, 90 NIR, and 42 extended NIR LEDs with clear conical optics in front of each
One ZF120A-1202000 LED driver, fan power supplies, and integrated controller boards.



Performance Summary

Electrical

Voltage	120.0 Vac
Current	3.837 A
Power	458.4 W
Frequency	60.00 Hz
Power Factor	0.995
Current THD	5.8 %

Ambient Temperature	25.4 °C
---------------------	---------

Grid Dimensions

Test Plane Distance	6 inches
X Axis minimum	-10 inches
X Axis maximum	10 inches
X Axis increments	2 inches
Y Axis minimum	-20 inches
Y Axis maximum	20 inches
Y Axis increments	2 inches
Number of measurement points	231

Test Equipment:

Irradiance measurements were acquired with LightLab asset A108-Gigahertz-Optik BTS2048-VL-TEC and A114-Gigahertz-Optik BTS2048-NIR Spectral Irradiance Meters using LightLab's Application Distance Measurement Grid in the LightLab goniometer room with stray light reduction. The test subject was allowed to reach stabilization according to IES LM-79-24 criteria prior to measurements.

Prepared For:

Helio Cure

8605 Santa Monica Blvd


#792642

West Hollywood, CA 90069, USA

Test date: 04/07/2026

Report date: 04/09/2026

Signed: Michael L. Grather
Digitally signed by Michael L. Grather
Date: 2026.04.10 16:57:25 -04'00'



Report of Test


Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 6 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.09	0.13	0.16	0.19	0.21	0.21	0.20	0.18	0.16	0.12	0.09
18	0.13	0.17	0.23	0.27	0.30	0.31	0.30	0.26	0.22	0.17	0.13
16	0.17	0.24	0.62	1.39	1.86	1.68	1.65	1.22	0.46	0.23	0.17
14	0.22	0.50	4.53	30.10	43.20	27.39	35.30	22.30	1.67	0.31	0.22
12	0.27	0.62	6.12	68.61	80.29	77.92	71.99	52.37	2.79	0.40	0.27
10	0.31	0.75	7.50	80.19	82.42	75.27	86.14	53.22	2.98	0.47	0.32
8	0.35	0.68	6.10	74.34	80.84	76.66	76.28	50.72	3.20	0.52	0.35
6	0.38	0.78	6.74	72.31	83.07	82.20	80.14	57.17	3.18	0.54	0.39
4	0.41	0.82	7.32	65.39	76.63	71.34	75.13	54.85	3.45	0.64	0.41
2	0.42	0.82	6.69	76.62	78.36	86.01	72.93	52.80	3.43	0.62	0.43
0	0.43	0.83	6.49	72.93	85.05	71.72	82.14	55.71	3.50	0.64	0.44
-2	0.43	0.82	6.20	79.82	78.24	83.06	70.66	54.46	3.56	0.64	0.44
-4	0.42	0.84	6.19	72.16	81.32	78.96	78.24	56.12	3.69	0.66	0.43
-6	0.40	0.80	6.42	65.81	77.83	78.09	71.34	55.55	3.85	0.68	0.42
-8	0.38	0.83	6.09	74.72	80.16	80.22	75.19	55.14	3.80	0.65	0.40
-10	0.34	0.78	5.60	70.82	81.64	69.77	77.28	62.86	3.78	0.64	0.36
-12	0.30	0.69	5.37	63.75	72.53	78.26	72.40	51.50	3.36	0.53	0.32
-14	0.25	0.46	2.96	42.76	44.78	48.04	51.31	33.40	2.42	0.39	0.26
-16	0.20	0.29	0.87	1.91	2.57	2.92	2.70	1.84	0.70	0.28	0.21
-18	0.15	0.21	0.28	0.36	0.42	0.44	0.40	0.35	0.27	0.21	0.16
-20	0.11	0.15	0.20	0.24	0.27	0.27	0.26	0.23	0.19	0.15	0.12

Center Point Irradiance (350-1700nm)	71.72 mW/cm ²
Average Irradiance (350-1700nm)	26.31 mW/cm ²
Maximum Irradiance (350-1700nm)	86.14 mW/cm ²
Minimum Irradiance (350-1700nm)	0.09 mW/cm ²
Max/Min Ratio	916.24
Max/Avg Ratio	3.27
Target Area Radiant Power (350-1700nm)	135.77 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 6 inches

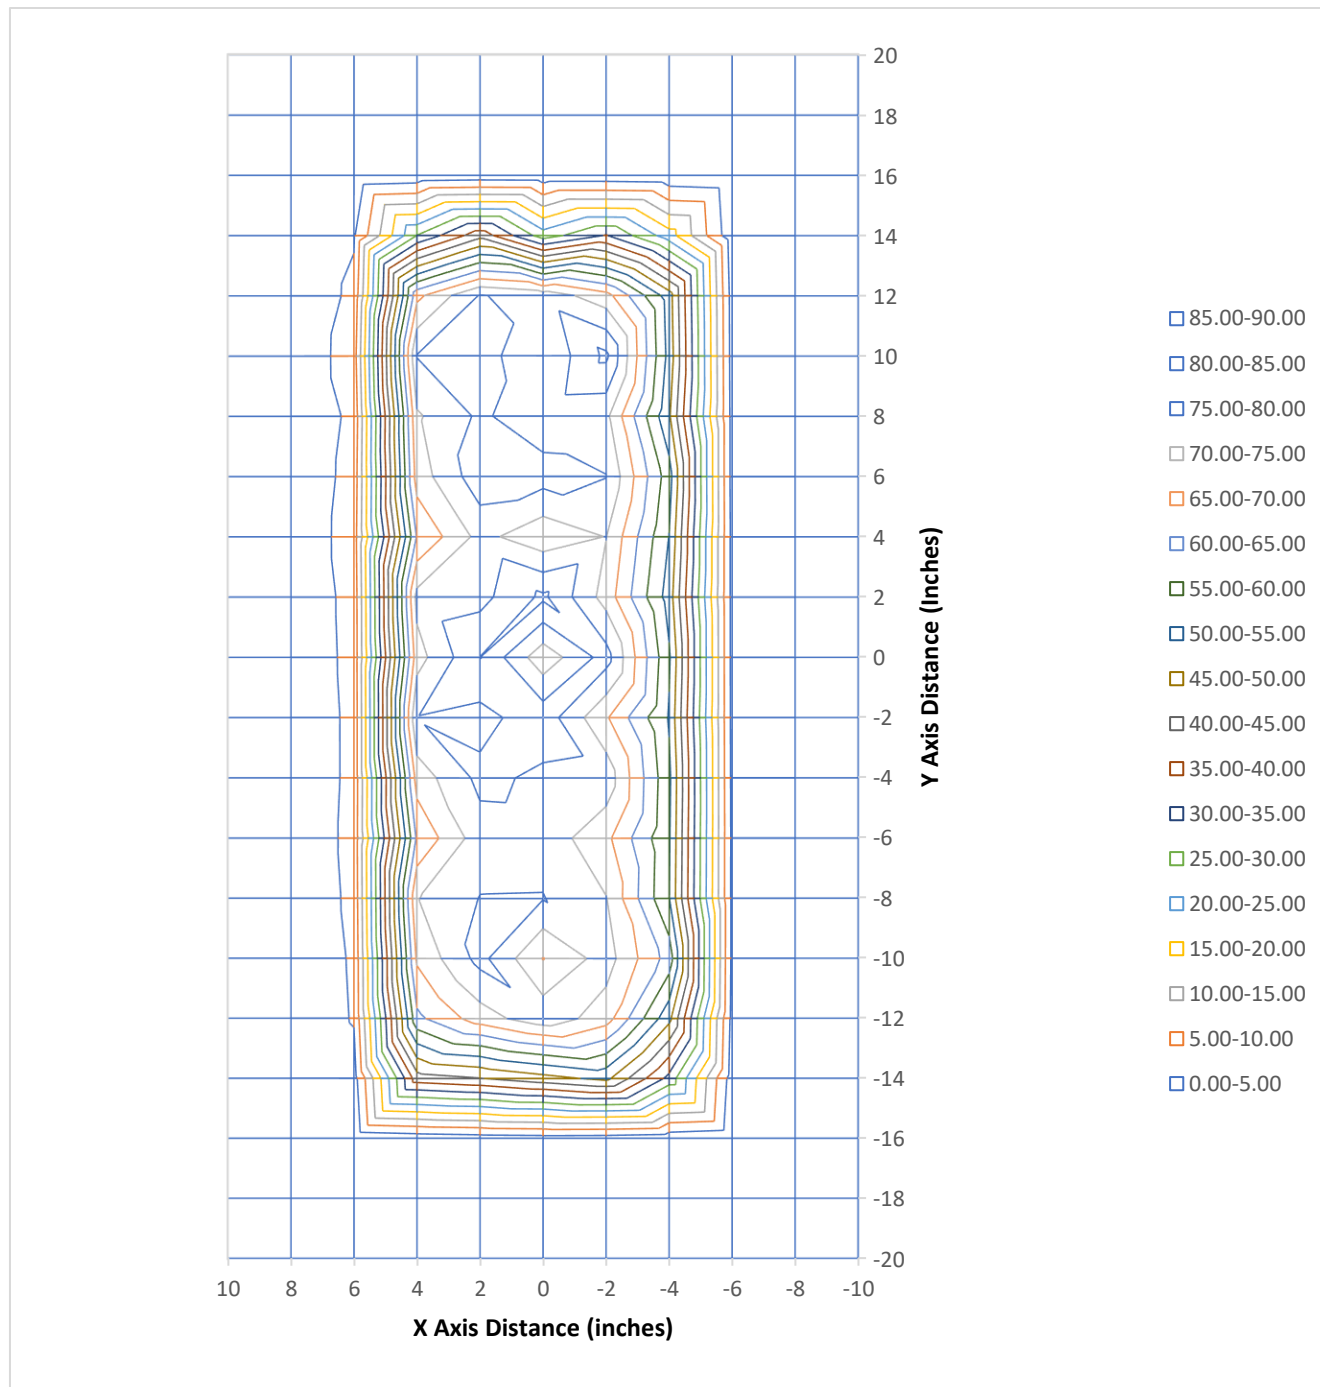



Report of Test


Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 6 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.04	0.06	0.07	0.09	0.09	0.10	0.09	0.08	0.07	0.06	0.04
18	0.06	0.08	0.11	0.13	0.14	0.15	0.14	0.12	0.10	0.08	0.06
16	0.08	0.11	0.42	0.70	0.87	0.83	0.68	0.65	0.23	0.11	0.08
14	0.10	0.32	3.49	18.85	27.35	6.18	23.79	11.24	1.03	0.15	0.10
12	0.13	0.34	3.00	32.64	23.02	37.33	16.35	34.04	1.51	0.20	0.13
10	0.15	0.46	5.22	41.84	56.05	22.60	44.04	34.92	1.62	0.24	0.15
8	0.17	0.36	3.61	56.00	35.51	30.84	35.01	16.09	1.71	0.25	0.17
6	0.18	0.38	2.95	28.80	27.42	28.98	28.60	43.02	1.72	0.26	0.18
4	0.19	0.45	4.80	37.64	36.19	22.47	39.59	31.15	2.11	0.33	0.20
2	0.20	0.44	3.40	52.79	25.23	34.28	24.86	17.48	1.71	0.30	0.20
0	0.21	0.46	3.46	31.59	53.93	24.57	33.94	44.26	1.82	0.32	0.21
-2	0.20	0.44	3.73	52.72	32.94	30.73	25.53	20.44	2.00	0.31	0.21
-4	0.20	0.43	3.35	39.02	31.28	32.23	37.88	33.01	1.95	0.32	0.21
-6	0.19	0.45	4.11	25.99	27.67	27.69	24.31	40.49	2.18	0.35	0.20
-8	0.18	0.49	3.99	56.23	35.45	23.01	37.55	15.34	1.97	0.34	0.19
-10	0.16	0.44	2.99	38.28	43.71	26.16	30.91	38.24	1.91	0.34	0.18
-12	0.14	0.36	3.06	30.17	26.01	27.15	23.05	34.50	1.95	0.27	0.16
-14	0.12	0.19	1.35	29.39	14.75	24.86	26.27	13.39	1.13	0.19	0.13
-16	0.09	0.14	0.46	1.14	1.38	1.41	1.44	0.96	0.30	0.14	0.10
-18	0.07	0.10	0.14	0.18	0.20	0.22	0.20	0.17	0.13	0.10	0.08
-20	0.05	0.07	0.09	0.11	0.13	0.13	0.12	0.11	0.09	0.07	0.06

Center Point Irradiance (600-700nm)	24.57 mW/cm ²
Average Irradiance (600-700nm)	12.27 mW/cm ²
Maximum Irradiance (600-700nm)	56.23 mW/cm ²
Minimum Irradiance (600-700nm)	0.04 mW/cm ²
Max/Min Ratio	1290.02
Max/Avg Ratio	4.58
Target Area Radiant Power (600-700nm)	63.33 W





Report of Test

Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 6 inches

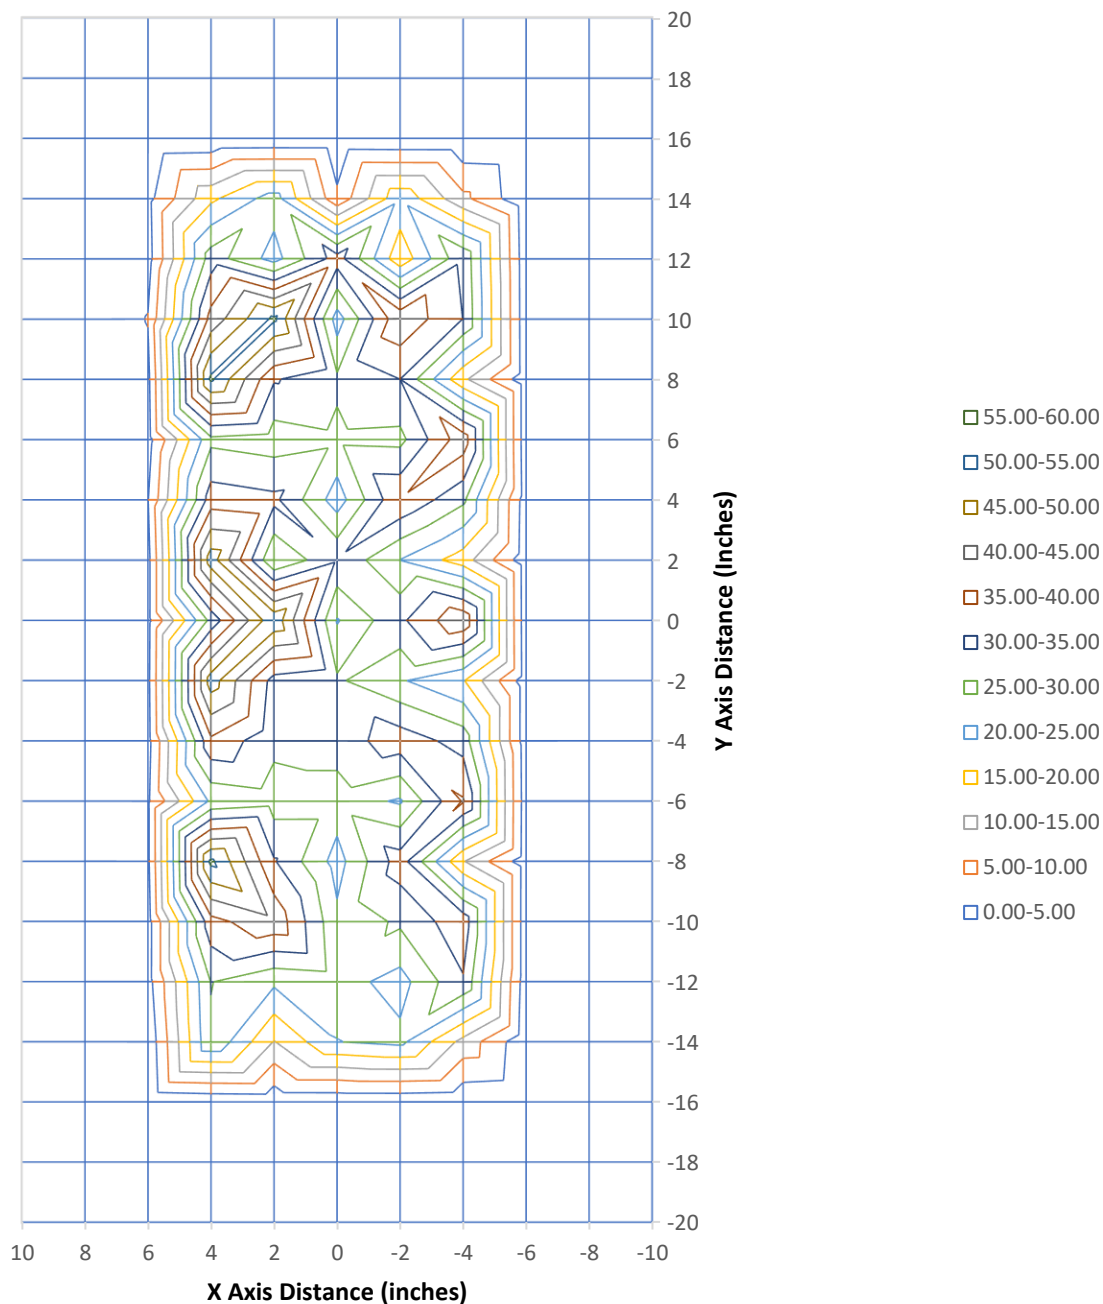



Report of Test


Test Report Number: LLIA002905-002

Irradiance (780-1700nm) in mW/cm²

Test Distance = 6 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.05	0.06	0.08	0.10	0.11	0.11	0.10	0.09	0.08	0.06	0.05
18	0.07	0.09	0.11	0.14	0.15	0.16	0.15	0.13	0.11	0.09	0.07
16	0.09	0.12	0.19	0.66	0.96	0.82	0.93	0.55	0.22	0.12	0.09
14	0.11	0.17	1.00	10.91	15.55	20.91	11.06	10.94	0.61	0.15	0.11
12	0.14	0.27	3.03	34.38	54.71	38.83	53.34	17.07	1.22	0.19	0.14
10	0.16	0.28	2.19	35.94	25.29	51.58	40.81	17.45	1.30	0.22	0.16
8	0.18	0.31	2.38	17.54	43.81	44.04	39.60	33.26	1.43	0.27	0.18
6	0.19	0.37	3.54	41.20	53.25	51.77	49.09	13.76	1.42	0.27	0.19
4	0.20	0.36	2.42	26.08	39.69	47.68	34.08	23.44	1.30	0.29	0.21
2	0.21	0.37	3.19	23.13	50.64	49.96	46.73	33.17	1.65	0.31	0.22
0	0.22	0.36	2.95	39.35	30.34	46.47	45.85	10.97	1.60	0.31	0.22
-2	0.21	0.37	2.36	25.74	43.74	49.43	43.96	32.24	1.50	0.32	0.22
-4	0.21	0.39	2.66	30.94	48.14	45.44	38.21	22.85	1.69	0.33	0.22
-6	0.20	0.34	2.22	37.91	49.06	48.54	45.16	14.52	1.61	0.31	0.21
-8	0.18	0.32	2.03	17.73	42.15	55.61	36.43	37.43	1.73	0.29	0.20
-10	0.17	0.33	2.53	31.21	36.92	42.95	44.17	23.79	1.79	0.29	0.18
-12	0.15	0.31	2.18	32.06	44.67	48.86	48.12	15.97	1.36	0.25	0.15
-14	0.12	0.26	1.52	12.46	29.16	22.57	24.06	19.88	1.27	0.19	0.13
-16	0.10	0.14	0.38	0.74	1.14	1.46	1.23	0.86	0.39	0.14	0.10
-18	0.08	0.11	0.14	0.18	0.21	0.21	0.19	0.18	0.13	0.10	0.08
-20	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.11	0.10	0.08	0.06

Center Point Irradiance (780-1700nm)	46.47 mW/cm ²
Average Irradiance (780-1700nm)	13.50 mW/cm ²
Maximum Irradiance (780-1700nm)	55.61 mW/cm ²
Minimum Irradiance (780-1700nm)	0.05 mW/cm ²
Max/Min Ratio	1170.49
Max/Avg Ratio	4.12
Target Area Radiant Power (780-1700nm)	69.67 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (780-1700nm) in mW/cm²

Test Distance = 6 inches

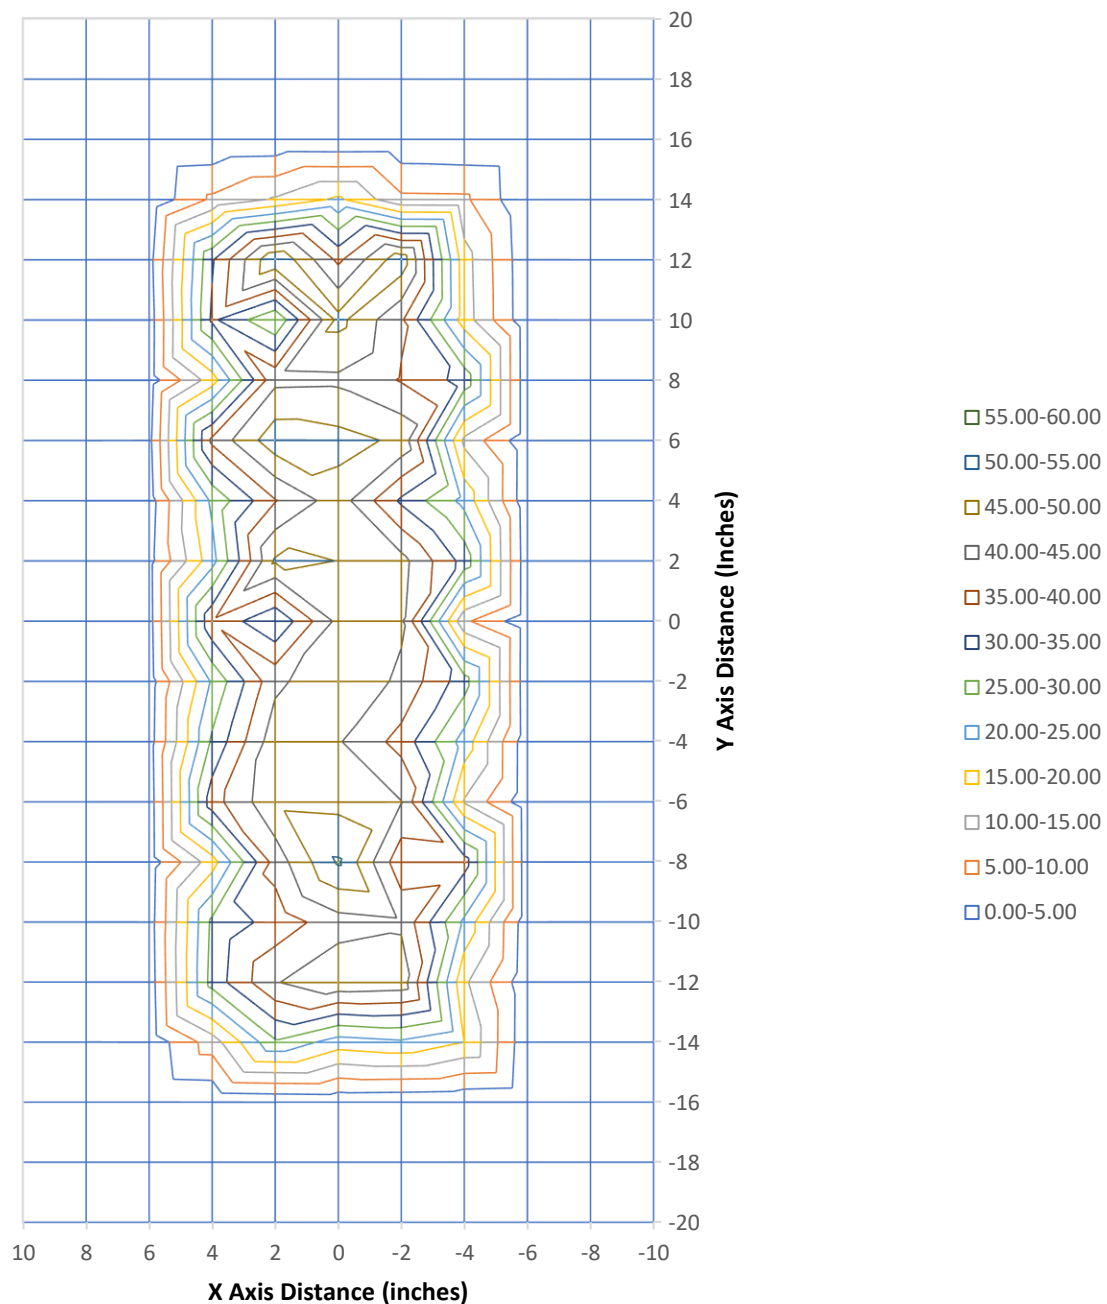



Grid Application Distance Measurement Test Report

Test Report Number: LLIA002905-002

Catalog Number: Helio Glow - All Channels 100% - No Pulsing

Portable, formed steel housing with three HYX-F8025M internal cooling fans,
one aluminum heatsink behind LEDs

216 LEDs, 84 Red, 90 NIR, and 42 extended NIR LEDs with clear conical optics in front of each
One ZF120A-1202000 LED driver, fan power supplies, and integrated controller boards.



Performance Summary

Electrical

Voltage	120.0 Vac
Current	3.837 A
Power	458.4 W
Frequency	60.00 Hz
Power Factor	0.995
Current THD	5.8 %

Ambient Temperature	25.4 °C
---------------------	---------

Grid Dimensions

Test Plane Distance	12 inches
X Axis minimum	-10 inches
X Axis maximum	10 inches
X Axis increments	2 inches
Y Axis minimum	-20 inches
Y Axis maximum	20 inches
Y Axis increments	2 inches
Number of measurement points	231

Test Equipment:

Irradiance measurements were acquired with LightLab asset A108-Gigahertz-Optik BTS2048-VL-TEC and A114-Gigahertz-Optik BTS2048-NIR Spectral Irradiance Meters using LightLab's Application Distance Measurement Grid in the LightLab goniometer room with stray light reduction. The test subject was allowed to reach stabilization according to IES LM-79-24 criteria prior to measurements.

Prepared For:

Helio Cure


8605 Santa Monica Blvd

#792642

West Hollywood, CA 90069, USA

Test date: 04/07/2026

Report date: 04/09/2026



Report of Test


Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 12 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.14	0.20	0.32	0.47	0.59	0.61	0.55	0.43	0.30	0.18	0.14
18	0.21	0.47	0.90	1.38	1.83	1.92	1.69	1.24	0.76	0.39	0.20
16	0.41	1.00	3.49	7.33	10.08	9.50	8.47	5.54	2.26	0.80	0.33
14	0.65	1.80	10.35	29.63	40.94	37.22	36.92	24.15	6.43	1.38	0.55
12	0.89	2.51	15.47	51.68	68.81	68.86	68.48	41.30	10.47	1.94	0.71
10	1.06	2.95	17.40	59.14	74.17	72.55	74.93	46.55	11.58	2.33	0.83
8	1.06	3.10	16.68	57.32	76.63	72.29	74.07	46.44	12.35	2.46	0.87
6	1.02	3.10	17.01	52.90	74.67	73.49	71.98	45.51	12.79	2.47	0.84
4	1.01	3.19	16.83	51.20	71.70	74.93	70.32	46.08	13.57	2.56	0.86
2	1.07	3.28	17.54	59.09	76.69	75.16	74.32	48.27	12.84	2.56	0.88
0	1.08	3.09	16.73	57.66	75.22	75.01	74.59	48.20	11.95	2.61	0.92
-2	1.04	3.05	16.20	55.22	73.37	76.03	70.81	47.00	13.13	2.65	0.94
-4	1.06	3.03	16.26	52.04	73.86	73.40	68.42	46.38	13.98	2.64	0.93
-6	1.02	3.12	15.77	52.84	72.86	72.71	69.88	47.74	14.89	2.65	0.93
-8	0.99	3.05	15.26	53.48	73.58	71.82	72.64	50.12	14.83	2.64	0.95
-10	0.93	2.77	15.83	50.89	71.50	72.72	70.27	48.55	13.99	2.46	0.89
-12	0.81	2.22	13.09	46.03	67.15	64.87	62.93	41.91	11.78	2.05	0.74
-14	0.58	1.50	7.09	25.38	35.43	35.72	35.34	24.57	7.21	1.49	0.54
-16	0.37	0.84	1.96	5.24	7.32	8.24	7.85	5.83	2.38	0.83	0.35
-18	0.21	0.42	0.74	1.21	1.62	1.78	1.60	1.19	0.75	0.40	0.21
-20	0.15	0.20	0.30	0.46	0.54	0.57	0.55	0.43	0.31	0.21	0.16

Center Point Irradiance (350-1700nm)	75.01 mW/cm ²
Average Irradiance (350-1700nm)	25.30 mW/cm ²
Maximum Irradiance (350-1700nm)	76.69 mW/cm ²
Minimum Irradiance (350-1700nm)	0.14 mW/cm ²
Max/Min Ratio	552.17
Max/Avg Ratio	3.03
Target Area Radiant Power (350-1700nm)	130.58 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 12 inches

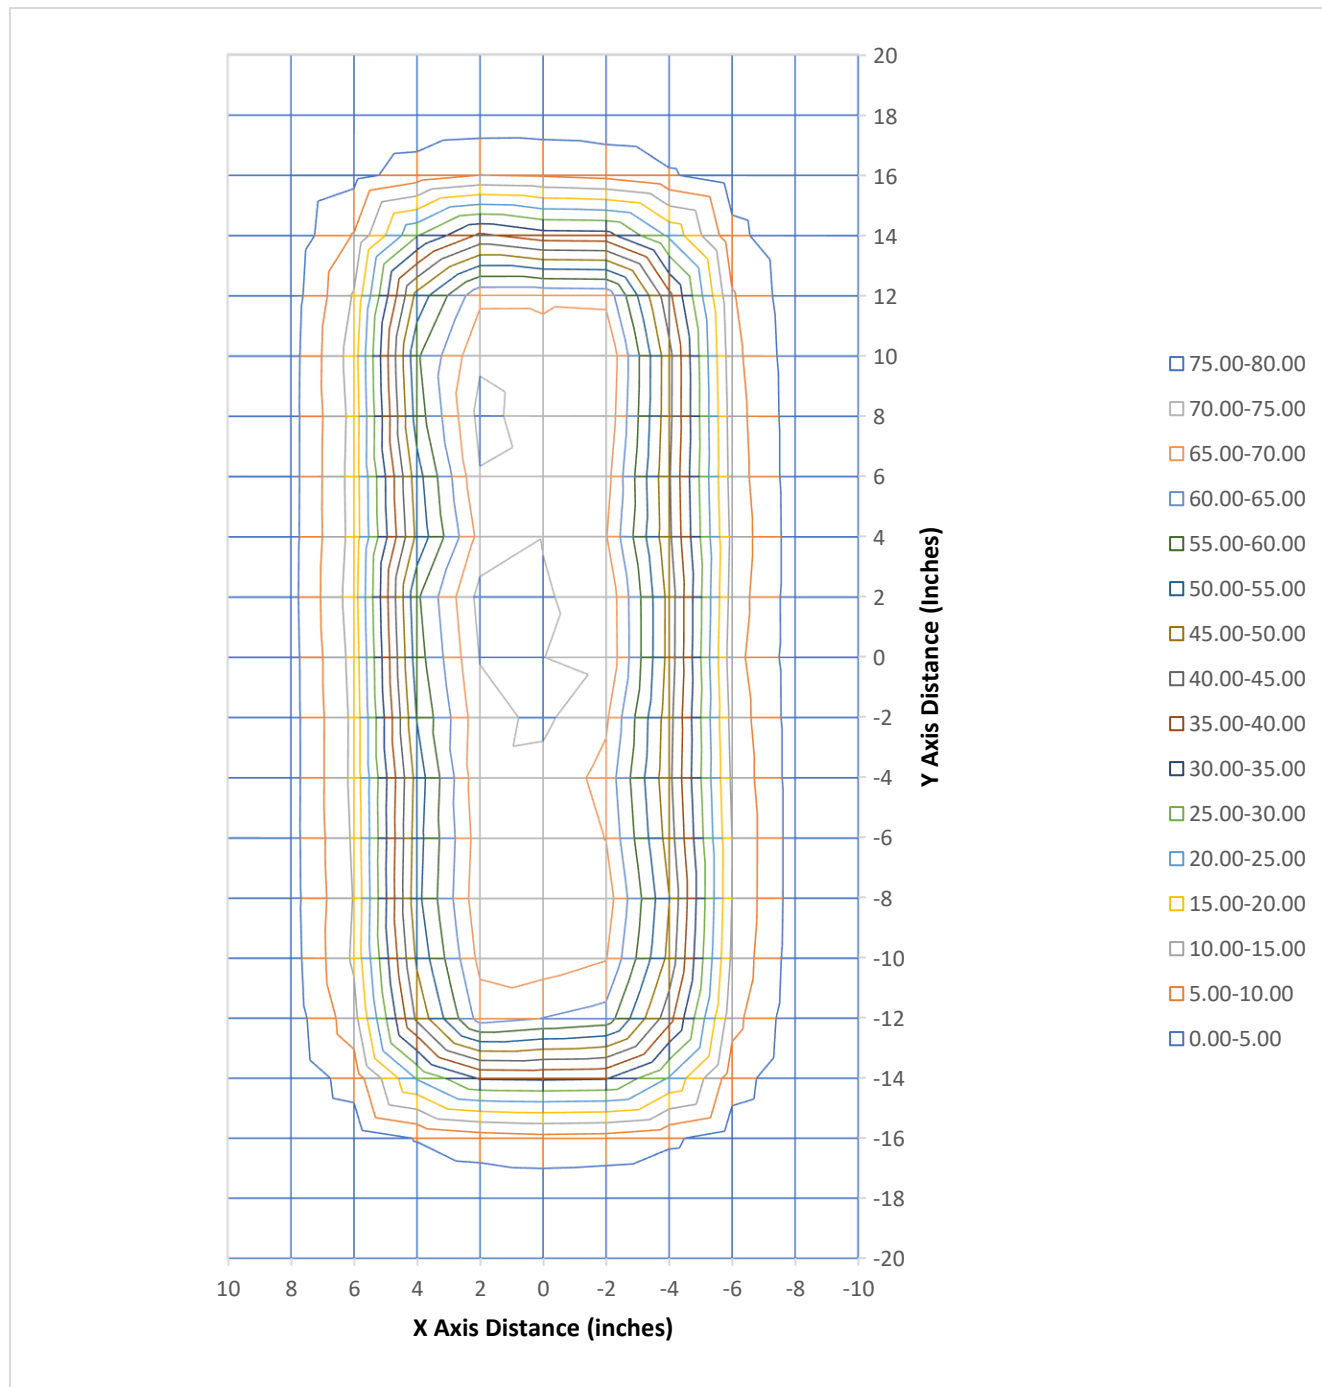



Report of Test


Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 12 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.07	0.12	0.17	0.24	0.29	0.29	0.28	0.23	0.16	0.09	0.07
18	0.12	0.24	0.49	0.71	0.84	0.86	0.72	0.58	0.37	0.22	0.10
16	0.24	0.57	2.35	4.02	5.34	4.85	4.23	2.62	1.19	0.40	0.19
14	0.36	1.01	6.26	14.02	17.13	15.20	16.29	13.13	3.85	0.70	0.28
12	0.49	1.37	9.28	26.29	30.06	26.10	28.44	19.75	5.79	1.01	0.37
10	0.60	1.65	10.43	34.46	37.20	31.32	33.76	23.06	6.06	1.17	0.45
8	0.58	1.72	9.75	30.36	36.61	30.39	32.01	24.14	6.65	1.26	0.46
6	0.54	1.70	9.07	25.98	34.22	31.57	32.87	25.22	7.47	1.23	0.45
4	0.56	1.71	9.30	26.42	32.75	28.67	30.12	24.32	7.65	1.29	0.45
2	0.58	1.73	10.05	31.67	34.96	28.51	30.65	22.45	7.10	1.31	0.45
0	0.57	1.65	9.75	33.25	38.25	31.84	33.47	23.36	6.23	1.34	0.47
-2	0.56	1.66	8.78	27.95	33.72	30.87	30.20	23.68	6.87	1.35	0.51
-4	0.59	1.60	8.91	25.56	33.49	30.90	30.80	25.33	7.81	1.34	0.49
-6	0.58	1.68	9.37	27.66	32.62	29.51	30.28	23.55	7.88	1.31	0.50
-8	0.55	1.62	8.85	29.98	35.81	30.76	30.02	23.92	7.52	1.35	0.50
-10	0.49	1.49	9.79	28.54	35.43	31.05	31.02	23.74	7.25	1.24	0.47
-12	0.44	1.18	6.70	23.22	29.68	26.16	26.61	21.75	6.80	1.04	0.40
-14	0.31	0.75	3.17	12.81	16.95	14.42	16.49	14.10	3.59	0.77	0.29
-16	0.19	0.43	1.04	3.09	3.65	4.15	3.88	2.58	0.98	0.39	0.18
-18	0.11	0.22	0.39	0.60	0.78	0.84	0.76	0.58	0.36	0.22	0.10
-20	0.07	0.10	0.16	0.24	0.28	0.29	0.27	0.22	0.16	0.10	0.08

Center Point Irradiance (600-700nm)	31.84 mW/cm ²
Average Irradiance (600-700nm)	11.96 mW/cm ²
Maximum Irradiance (600-700nm)	38.25 mW/cm ²
Minimum Irradiance (600-700nm)	0.07 mW/cm ²
Max/Min Ratio	565.44
Max/Avg Ratio	3.20
Target Area Radiant Power (600-700nm)	61.73 W





Report of Test

Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 12 inches

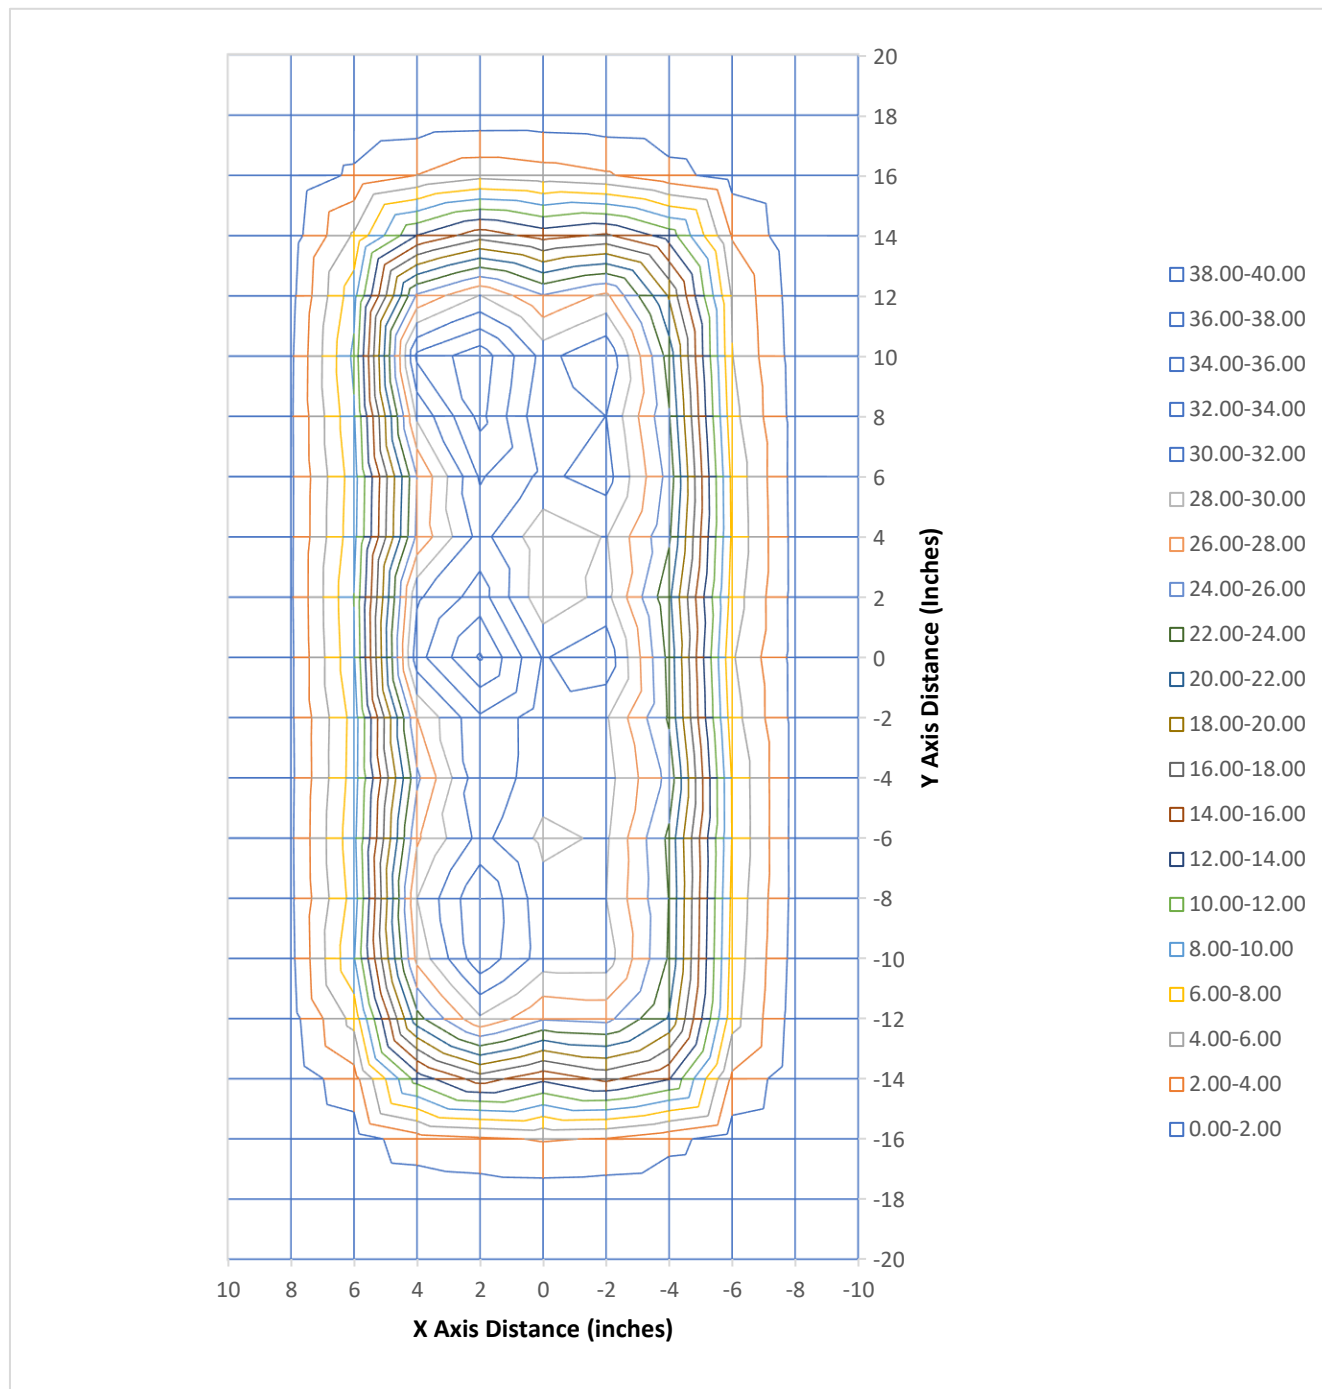



Report of Test


Test Report Number: LLIA002905-002

Irradiance (780-1700nm) in mW/cm²

Test Distance = 12 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.07	0.08	0.15	0.23	0.29	0.31	0.27	0.19	0.14	0.09	0.07
18	0.09	0.22	0.39	0.65	0.95	1.02	0.93	0.64	0.38	0.17	0.09
16	0.17	0.41	1.09	3.22	4.62	4.52	4.11	2.85	1.04	0.38	0.14
14	0.27	0.75	3.92	15.01	22.91	21.25	19.90	10.57	2.49	0.66	0.26
12	0.38	1.10	5.96	24.22	36.98	41.13	38.45	20.55	4.44	0.89	0.33
10	0.44	1.25	6.71	23.50	35.51	39.94	39.66	22.52	5.28	1.12	0.36
8	0.45	1.32	6.62	25.69	38.47	40.48	40.37	21.41	5.48	1.15	0.39
6	0.45	1.34	7.47	25.70	38.92	40.48	37.67	19.62	5.17	1.20	0.37
4	0.43	1.42	7.19	23.72	37.51	44.68	38.87	21.00	5.74	1.23	0.40
2	0.47	1.49	7.24	26.23	40.16	45.11	42.12	24.82	5.47	1.20	0.41
0	0.49	1.39	6.76	23.35	35.66	41.79	39.47	23.85	5.49	1.22	0.44
-2	0.46	1.33	7.08	26.05	38.13	43.41	38.88	22.34	6.02	1.25	0.41
-4	0.45	1.37	6.93	25.31	38.86	40.95	36.38	20.31	6.01	1.25	0.42
-6	0.42	1.38	6.15	24.24	38.82	41.73	38.18	23.22	6.70	1.28	0.42
-8	0.42	1.37	6.19	22.48	36.30	39.73	41.06	25.16	6.90	1.24	0.42
-10	0.41	1.22	5.82	21.33	34.73	40.38	37.80	23.84	6.49	1.17	0.40
-12	0.35	1.00	6.06	21.75	35.89	37.31	34.93	19.34	4.82	0.98	0.33
-14	0.26	0.72	3.68	12.01	17.76	20.63	18.26	10.19	3.55	0.70	0.24
-16	0.17	0.40	0.87	2.07	3.57	3.99	3.88	3.20	1.38	0.43	0.16
-18	0.10	0.19	0.34	0.59	0.81	0.91	0.81	0.60	0.38	0.17	0.11
-20	0.07	0.09	0.14	0.20	0.25	0.27	0.26	0.21	0.15	0.11	0.08

Center Point Irradiance (780-1700nm)	41.79 mW/cm ²
Average Irradiance (780-1700nm)	12.83 mW/cm ²
Maximum Irradiance (780-1700nm)	45.11 mW/cm ²
Minimum Irradiance (780-1700nm)	0.07 mW/cm ²
Max/Min Ratio	662.21
Max/Avg Ratio	3.52
Target Area Radiant Power (780-1700nm)	66.22 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (780-1700nm) in mW/cm²

Test Distance = 12 inches

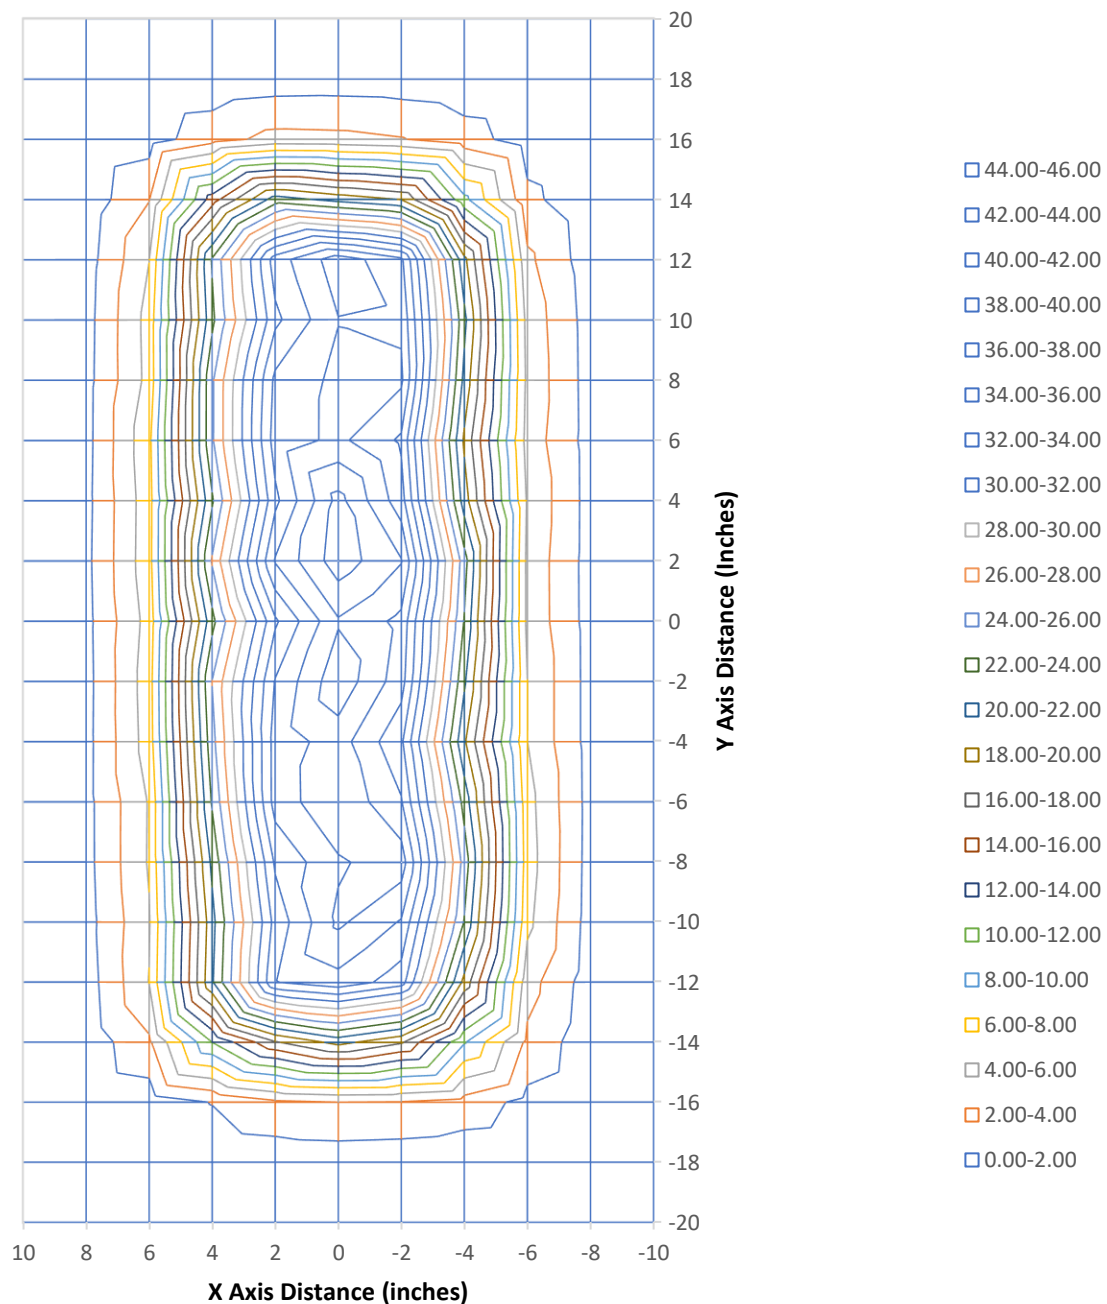



Grid Application Distance Measurement Test Report

Test Report Number: LLIA002905-002

Catalog Number: Helio Glow - All Channels 100% - No Pulsing

Portable, formed steel housing with three HYX-F8025M internal cooling fans,
one aluminum heatsink behind LEDs

216 LEDs, 84 Red, 90 NIR, and 42 extended NIR LEDs with clear conical optics in front of each
One ZF120A-1202000 LED driver, fan power supplies, and integrated controller boards.



Performance Summary

Electrical

Voltage	120.0 Vac
Current	3.837 A
Power	458.4 W
Frequency	60.00 Hz
Power Factor	0.995
Current THD	5.8 %

Ambient Temperature	25.4 °C
---------------------	---------

Grid Dimensions

Test Plane Distance	24 inches
X Axis minimum	-10 inches
X Axis maximum	10 inches
X Axis increments	2 inches
Y Axis minimum	-20 inches
Y Axis maximum	20 inches
Y Axis increments	2 inches
Number of measurement points	231

Test Equipment:

Irradiance measurements were acquired with LightLab asset A108-Gigahertz-Optik BTS2048-VL-TEC and A114-Gigahertz-Optik BTS2048-NIR Spectral Irradiance Meters using LightLab's Application Distance Measurement Grid in the LightLab goniometer room with stray light reduction. The test subject was allowed to reach stabilization according to IES LM-79-24 criteria prior to measurements.

Prepared For:

Helio Cure


8605 Santa Monica Blvd

#792642

West Hollywood, CA 90069, USA

Test date: 04/07/2026

Report date: 04/09/2026



Report of Test


Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 24 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.76	1.17	1.65	2.09	2.39	2.40	2.25	1.87	1.44	1.02	0.68
18	1.19	2.28	3.89	5.78	7.27	7.18	6.42	4.79	3.21	1.82	1.04
16	1.88	4.29	8.69	13.81	17.50	17.72	15.42	11.28	6.90	3.12	1.53
14	2.66	7.08	15.18	24.60	31.81	33.91	29.20	20.33	11.94	5.15	2.12
12	3.34	9.56	21.48	34.65	46.46	50.17	43.13	30.54	16.91	6.90	2.74
10	3.82	11.01	25.60	42.65	55.91	61.03	52.73	36.82	20.24	8.54	3.22
8	4.13	11.64	26.28	44.22	58.37	63.90	55.00	39.42	22.21	9.23	3.52
6	4.28	11.77	25.90	43.93	57.92	63.05	55.69	40.02	22.94	9.70	3.76
4	4.51	12.07	26.27	44.55	58.43	63.86	57.12	41.15	23.56	9.86	3.96
2	4.57	12.07	27.12	44.39	59.21	64.90	58.28	41.86	24.22	10.01	4.08
0	4.56	11.95	27.40	44.76	59.13	65.25	58.21	41.52	23.75	10.45	4.14
-2	4.46	11.76	26.05	43.91	58.52	64.64	56.30	40.79	23.58	10.46	4.12
-4	4.28	11.19	25.07	42.73	57.35	62.78	56.16	40.15	23.96	10.59	4.11
-6	4.05	10.60	24.20	41.94	56.58	62.48	55.35	41.17	24.35	10.74	4.01
-8	3.77	10.03	23.45	40.51	55.08	61.82	55.38	40.53	24.55	10.73	3.76
-10	3.41	9.33	20.80	37.38	50.89	57.32	51.55	37.81	22.56	9.81	3.37
-12	2.79	7.73	17.27	30.21	41.40	46.64	41.06	30.11	17.76	7.89	2.84
-14	2.07	5.36	11.62	20.46	27.54	31.02	27.04	20.23	12.07	5.48	2.16
-16	1.44	3.10	6.14	10.57	14.04	15.74	14.16	10.99	6.70	3.34	1.53
-18	0.97	1.64	2.81	4.19	5.13	5.84	5.52	4.46	3.01	1.77	1.03
-20	0.64	0.95	1.30	1.62	1.87	1.98	1.93	1.71	1.35	0.99	0.69

Center Point Irradiance (350-1700nm)	65.25 mW/cm ²
Average Irradiance (350-1700nm)	23.93 mW/cm ²
Maximum Irradiance (350-1700nm)	65.25 mW/cm ²
Minimum Irradiance (350-1700nm)	0.64 mW/cm ²
Max/Min Ratio	102.59
Max/Avg Ratio	2.73
Target Area Radiant Power (350-1700nm)	123.50 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 24 inches

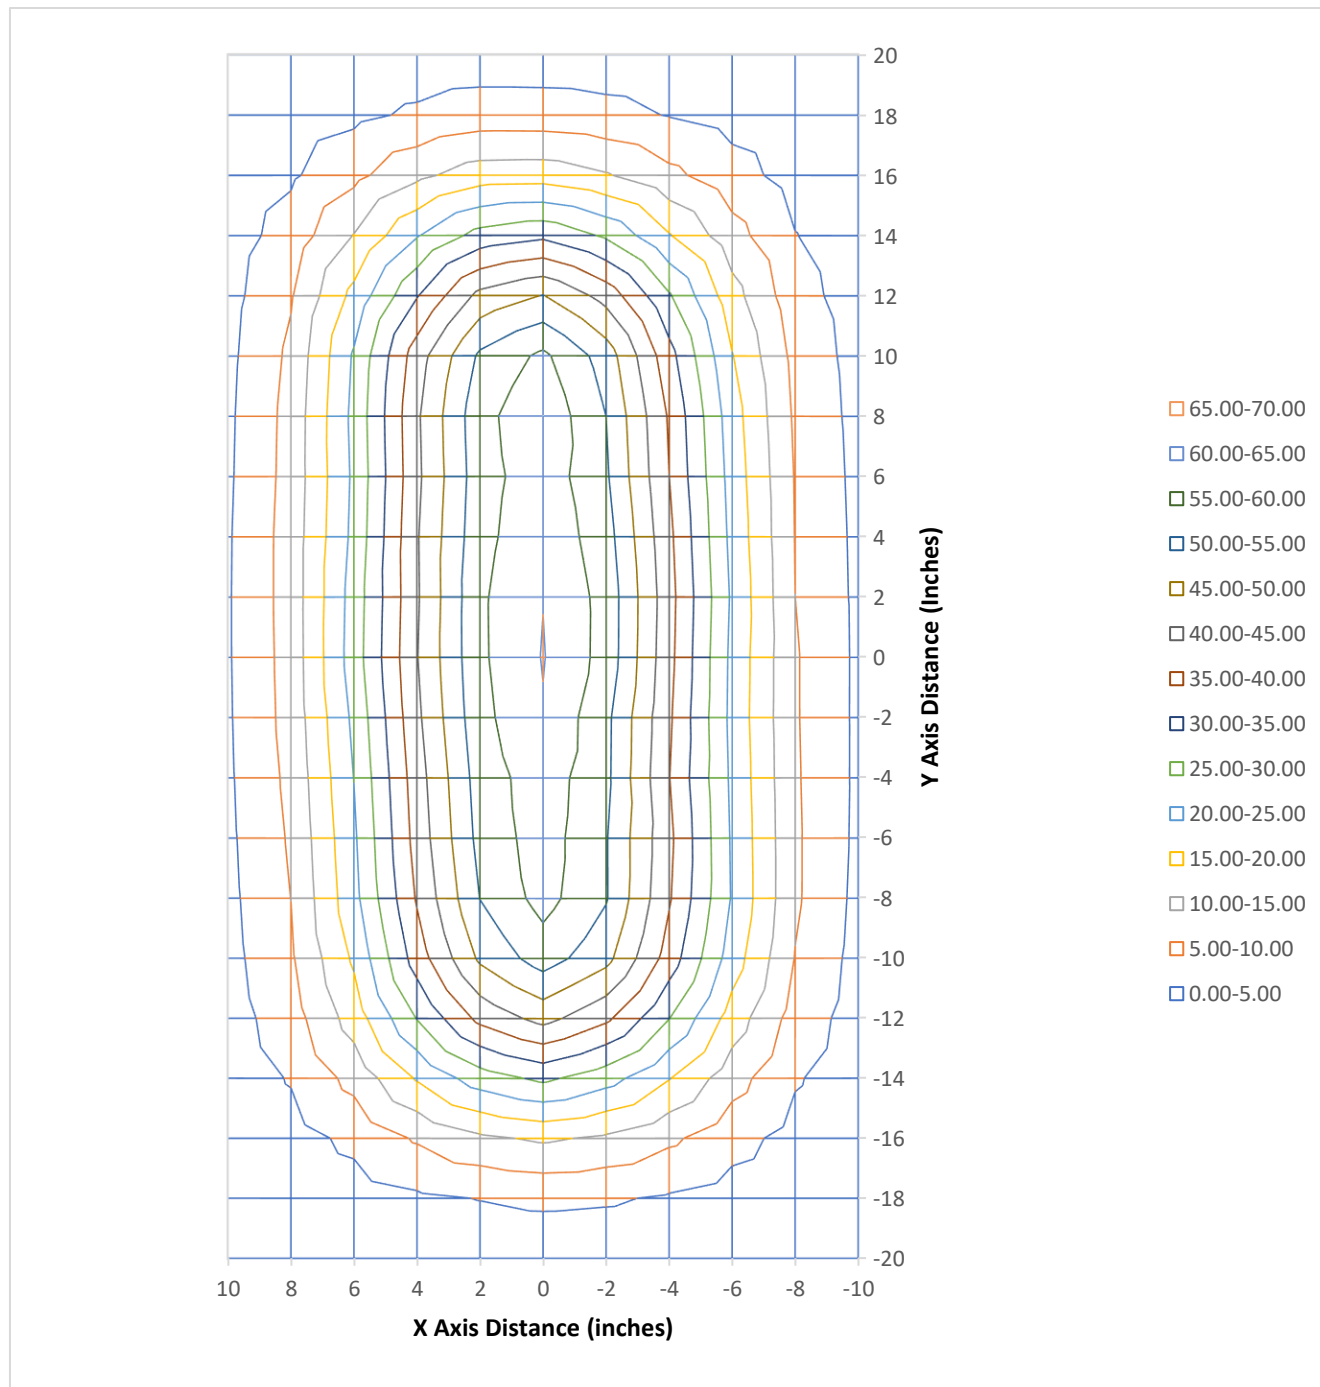



Report of Test


Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 24 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.39	0.58	0.84	1.04	1.17	1.16	1.09	0.89	0.68	0.48	0.33
18	0.61	1.23	1.99	2.92	3.66	3.48	3.16	2.44	1.69	0.93	0.49
16	1.00	2.26	4.49	6.50	7.93	7.95	7.00	5.40	3.39	1.59	0.75
14	1.43	3.91	7.57	11.33	14.24	14.79	13.05	9.33	5.92	2.65	1.03
12	1.75	5.26	11.14	16.62	20.75	22.40	18.79	13.91	8.27	3.50	1.35
10	1.96	6.07	13.64	20.98	26.04	27.50	23.21	16.94	9.92	4.48	1.60
8	2.09	6.36	13.75	21.69	27.51	28.88	24.94	18.31	11.45	4.89	1.75
6	2.16	6.22	13.32	21.16	26.72	28.63	25.12	18.95	11.94	5.19	1.87
4	2.29	6.44	13.48	21.54	26.72	28.41	25.48	19.27	11.87	5.24	1.97
2	2.33	6.49	14.21	21.87	26.88	28.61	25.61	19.47	12.05	5.05	2.01
0	2.34	6.33	14.47	21.93	27.11	29.19	25.48	18.96	11.49	5.30	2.02
-2	2.26	6.30	13.45	21.64	27.13	28.75	25.39	18.83	11.45	5.40	2.01
-4	2.18	6.05	12.77	20.39	25.88	28.11	25.20	18.66	12.07	5.37	1.98
-6	2.10	5.76	12.67	20.10	26.37	27.97	24.63	19.08	11.85	5.47	1.96
-8	1.96	5.61	12.46	20.32	25.74	28.12	24.96	18.63	11.95	5.40	1.85
-10	1.78	5.12	11.12	18.60	23.73	25.77	22.82	17.37	11.02	5.00	1.66
-12	1.44	4.24	8.97	14.86	19.30	20.90	18.54	14.10	8.73	4.18	1.41
-14	1.04	2.83	5.76	9.77	12.31	13.86	12.37	9.45	6.18	2.89	1.03
-16	0.70	1.55	2.96	4.93	6.48	7.13	6.41	5.37	3.35	1.74	0.71
-18	0.48	0.81	1.46	2.15	2.57	2.86	2.69	2.18	1.43	0.82	0.49
-20	0.31	0.47	0.65	0.80	0.89	0.92	0.89	0.79	0.61	0.45	0.33

Center Point Irradiance (600-700nm)	29.19 mW/cm ²
Average Irradiance (600-700nm)	11.29 mW/cm ²
Maximum Irradiance (600-700nm)	29.19 mW/cm ²
Minimum Irradiance (600-700nm)	0.31 mW/cm ²
Max/Min Ratio	94.05
Max/Avg Ratio	2.59
Target Area Radiant Power (600-700nm)	58.28 W





Report of Test

Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 24 inches

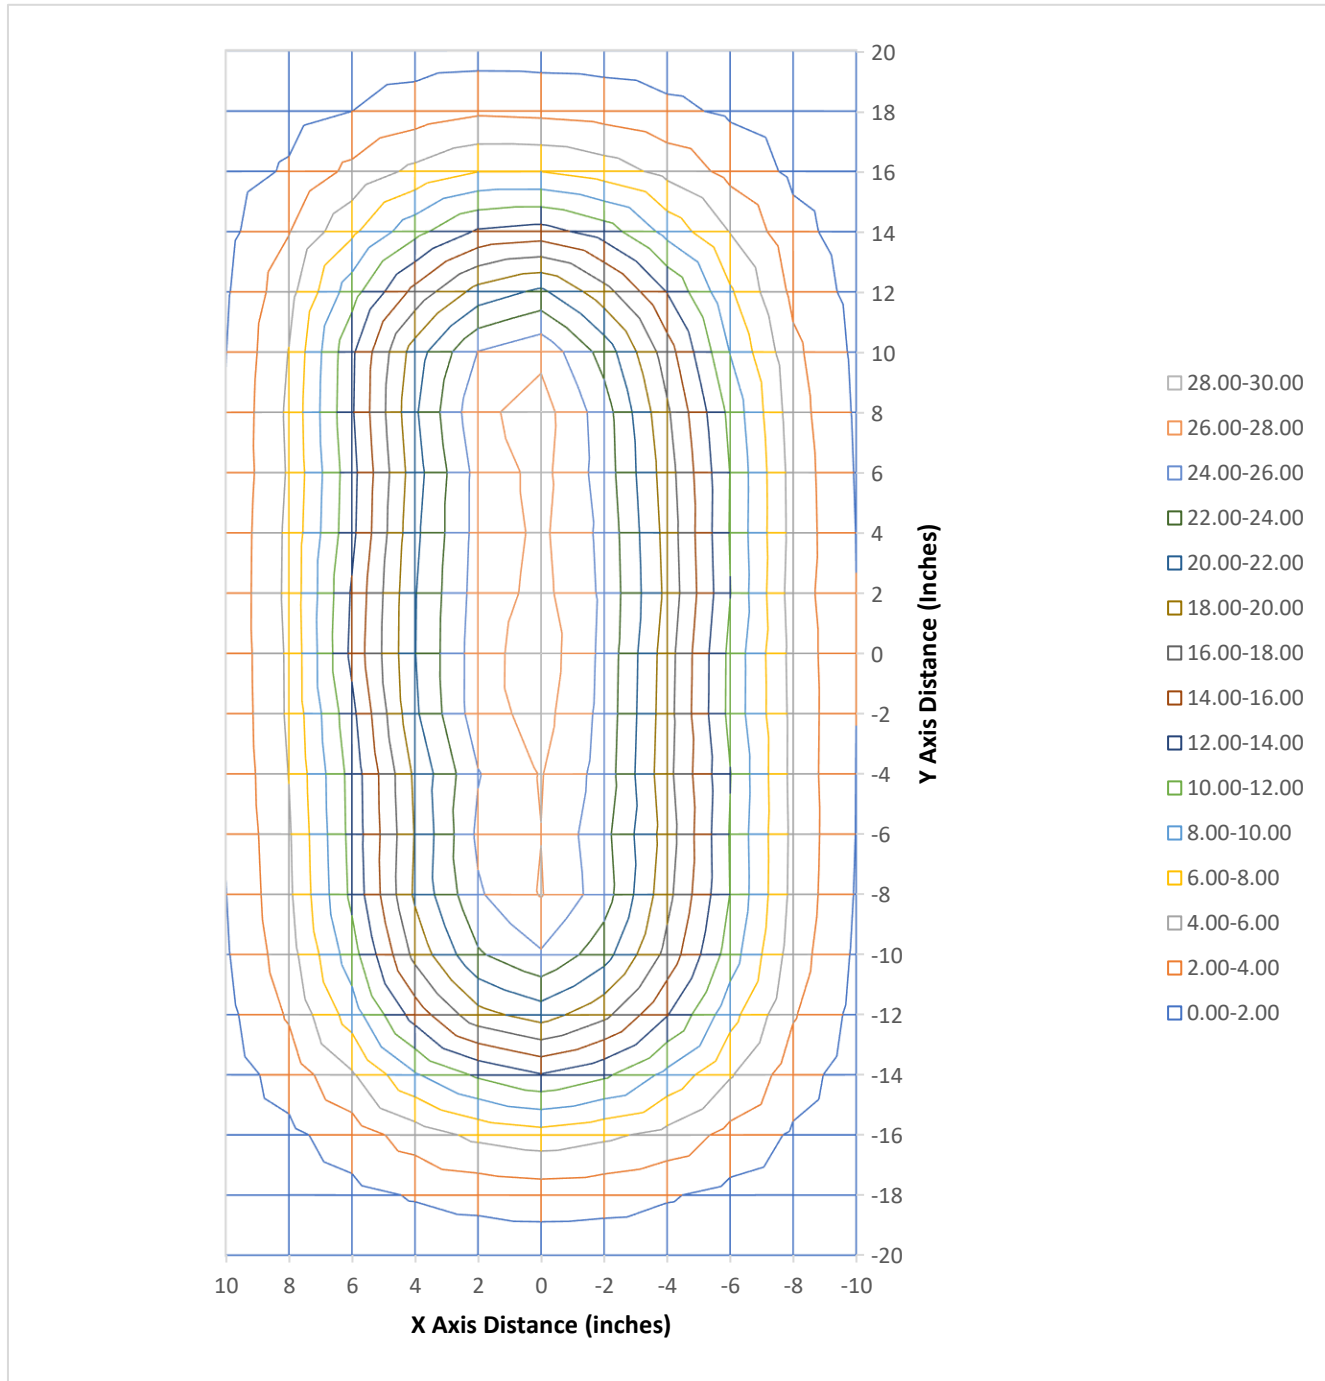



Report of Test


Test Report Number: LLIA002905-002

Irradiance (780-1700nm) in mW/cm²

Test Distance = 24 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.36	0.56	0.78	1.01	1.17	1.20	1.12	0.94	0.73	0.52	0.34
18	0.56	1.01	1.83	2.76	3.49	3.59	3.15	2.27	1.47	0.86	0.52
16	0.85	1.95	4.04	7.04	9.21	9.41	8.12	5.65	3.37	1.48	0.76
14	1.19	3.05	7.31	12.74	16.88	18.38	15.54	10.56	5.77	2.40	1.05
12	1.52	4.12	9.92	17.29	24.67	26.69	23.42	15.97	8.28	3.26	1.34
10	1.78	4.73	11.46	20.77	28.67	32.24	28.40	19.12	9.91	3.89	1.56
8	1.96	5.04	11.99	21.62	29.67	33.71	28.95	20.31	10.35	4.18	1.71
6	2.04	5.30	12.04	21.85	30.02	33.17	29.44	20.30	10.60	4.35	1.82
4	2.14	5.39	12.27	22.11	30.54	34.15	30.49	21.07	11.26	4.45	1.92
2	2.16	5.36	12.39	21.65	31.10	34.96	31.47	21.55	11.72	4.78	1.99
0	2.14	5.40	12.42	21.94	30.80	34.69	31.51	21.73	11.80	4.96	2.04
-2	2.11	5.23	12.10	21.41	30.18	34.53	29.75	21.12	11.68	4.87	2.04
-4	2.02	4.92	11.81	21.48	30.27	33.40	29.81	20.69	11.44	5.02	2.05
-6	1.87	4.64	11.06	21.01	29.08	33.25	29.61	21.28	12.01	5.06	1.98
-8	1.74	4.25	10.54	19.40	28.25	32.46	29.32	21.09	12.12	5.11	1.83
-10	1.56	4.03	9.27	18.04	26.10	30.37	27.68	19.70	11.10	4.63	1.65
-12	1.30	3.33	7.94	14.71	21.24	24.77	21.71	15.43	8.71	3.58	1.38
-14	0.99	2.42	5.60	10.25	14.64	16.53	14.16	10.40	5.69	2.51	1.09
-16	0.70	1.48	3.05	5.41	7.28	8.31	7.50	5.45	3.25	1.56	0.79
-18	0.47	0.79	1.30	1.96	2.48	2.89	2.75	2.22	1.53	0.92	0.53
-20	0.31	0.45	0.62	0.80	0.95	1.02	1.00	0.89	0.71	0.52	0.35

Center Point Irradiance (780-1700nm)	34.69 mW/cm ²
Average Irradiance (780-1700nm)	12.16 mW/cm ²
Maximum Irradiance (780-1700nm)	34.96 mW/cm ²
Minimum Irradiance (780-1700nm)	0.31 mW/cm ²
Max/Min Ratio	111.96
Max/Avg Ratio	2.88
Target Area Radiant Power (780-1700nm)	62.74 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (780-1700nm) in mW/cm²

Test Distance = 24 inches

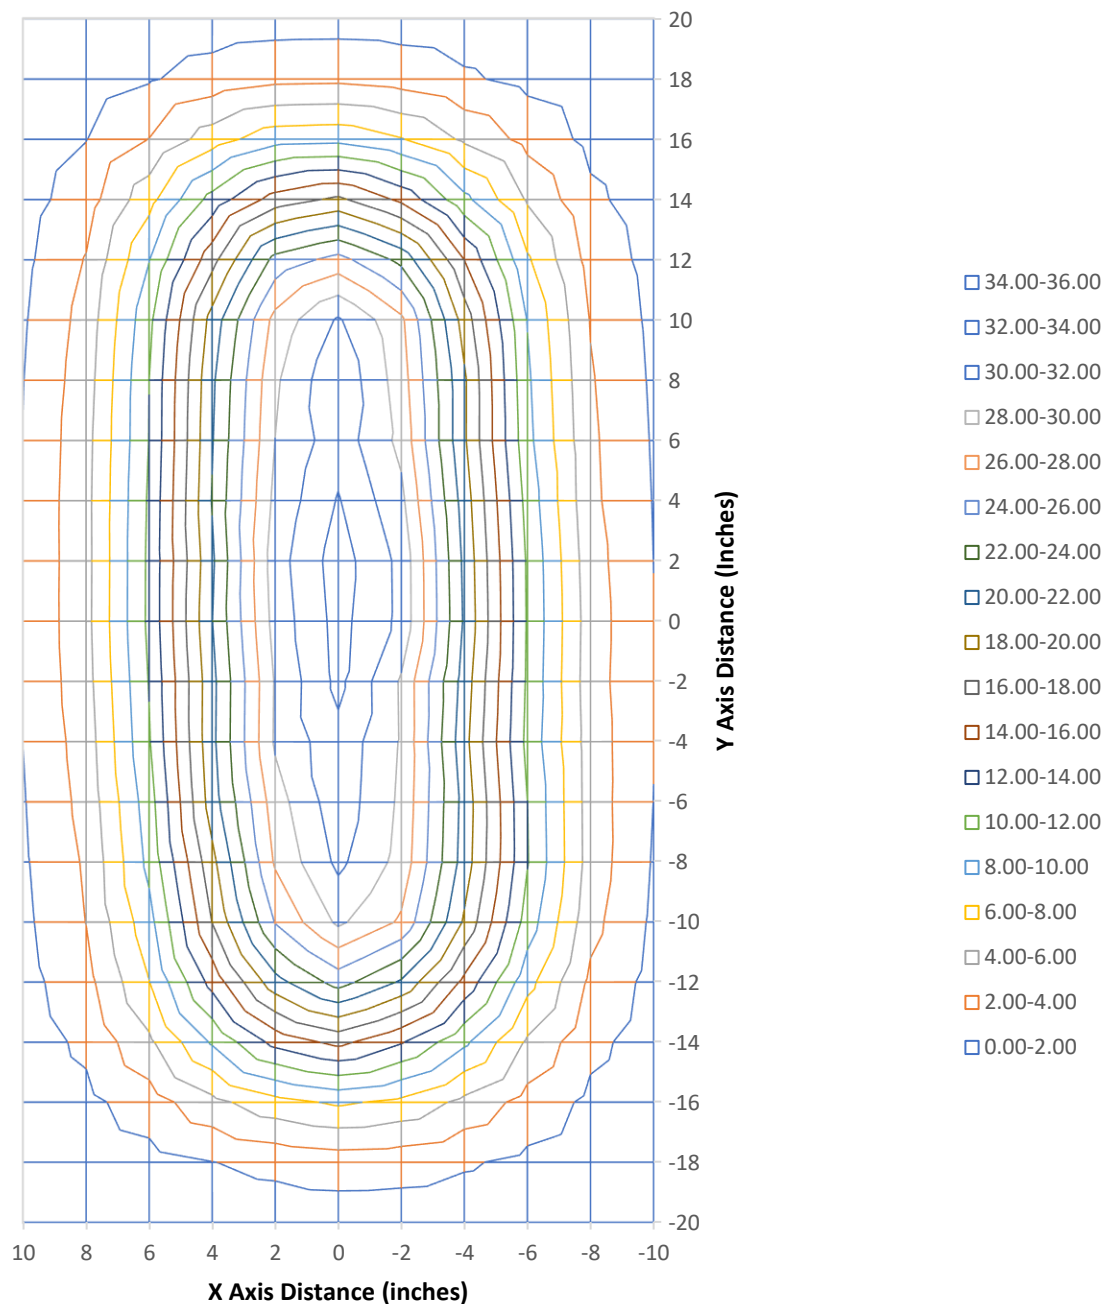




Grid Application Distance Measurement Test Report

Test Report Number: LLIA002905-002

Catalog Number: Helio Glow - All Channels 100% - No Pulsing

Portable, formed steel housing with three HYX-F8025M internal cooling fans,
one aluminum heatsink behind LEDs

216 LEDs, 84 Red, 90 NIR, and 42 extended NIR LEDs with clear conical optics in front of each
One ZF120A-1202000 LED driver, fan power supplies, and integrated controller boards.

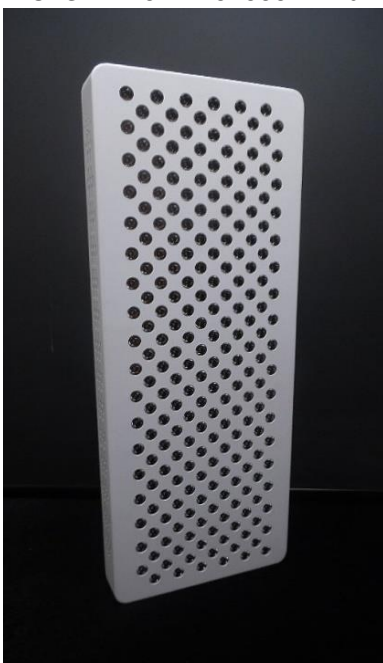

Performance Summary

Electrical

Voltage	120.0 Vac
Current	3.837 A
Power	458.4 W
Frequency	60.00 Hz
Power Factor	0.995
Current THD	5.8 %

Ambient Temperature	25.4 °C
---------------------	---------

Grid Dimensions

Test Plane Distance	36 inches
X Axis minimum	-10 inches
X Axis maximum	10 inches
X Axis increments	2 inches
Y Axis minimum	-20 inches
Y Axis maximum	20 inches
Y Axis increments	2 inches
Number of measurement points	231

Test Equipment:

Irradiance measurements were acquired with LightLab asset A108-Gigahertz-Optik BTS2048-VL-TEC and A114-Gigahertz-Optik BTS2048-NIR Spectral Irradiance Meters using LightLab's Application Distance Measurement Grid in the LightLab goniometer room with stray light reduction. The test subject was allowed to reach stabilization according to IES LM-79-24 criteria prior to measurements.

Prepared For:

Helio Cure


8605 Santa Monica Blvd

#792642

West Hollywood, CA 90069, USA

Test date: 04/07/2026

Report date: 04/09/2026



Report of Test


Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 36 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	1.77	2.63	3.81	4.82	5.56	5.68	5.14	4.35	3.28	2.27	1.52
18	2.79	4.54	6.90	9.00	10.60	10.88	10.00	8.04	5.82	3.86	2.32
16	4.19	7.23	11.03	14.78	17.63	18.24	16.63	13.25	9.43	5.92	3.45
14	5.74	10.08	15.87	21.39	25.88	26.53	24.40	19.48	13.63	8.35	4.73
12	7.14	12.80	20.39	27.90	33.77	35.10	31.73	25.39	17.90	10.80	5.96
10	8.22	14.91	23.98	33.08	39.76	42.12	37.95	30.30	21.54	12.92	6.92
8	8.87	16.48	26.57	36.30	44.03	46.65	42.70	34.34	23.93	14.52	7.78
6	9.16	17.21	27.71	37.74	45.92	48.92	44.89	36.39	25.56	15.46	8.22
4	9.30	17.29	27.76	38.33	46.31	49.33	46.04	36.98	26.45	15.93	8.41
2	9.34	17.31	27.42	38.10	46.42	49.49	46.00	37.42	26.56	16.13	8.57
0	9.22	17.11	27.35	37.87	46.22	49.38	46.05	37.22	26.58	16.02	8.75
-2	8.94	16.64	27.13	37.59	45.98	48.93	45.54	36.91	26.39	16.16	8.92
-4	8.62	16.27	26.32	37.10	45.20	48.34	45.19	36.75	26.20	16.21	8.97
-6	8.28	15.61	25.25	35.53	44.04	47.22	44.19	36.05	25.83	16.02	8.82
-8	7.61	14.30	23.19	33.27	40.97	43.99	41.39	33.96	24.57	15.30	8.46
-10	6.66	12.45	20.53	29.32	35.73	39.06	36.64	30.12	21.72	13.76	7.57
-12	5.51	10.24	16.55	23.79	29.27	31.87	29.74	24.55	17.65	11.34	6.30
-14	4.28	7.74	12.42	17.77	21.85	23.51	22.04	18.11	13.21	8.54	4.86
-16	3.06	5.31	8.41	11.76	14.34	15.70	14.54	12.06	8.83	5.76	3.40
-18	2.03	3.30	4.93	6.88	8.28	8.92	8.33	7.05	5.23	3.58	2.22
-20	1.31	1.92	2.65	3.40	4.02	4.32	4.17	3.64	2.84	2.07	1.42

Center Point Irradiance (350-1700nm)	49.38 mW/cm ²
Average Irradiance (350-1700nm)	21.87 mW/cm ²
Maximum Irradiance (350-1700nm)	49.49 mW/cm ²
Minimum Irradiance (350-1700nm)	1.31 mW/cm ²
Max/Min Ratio	37.75
Max/Avg Ratio	2.26
Target Area Radiant Power (350-1700nm)	112.87 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (350-1700nm) in mW/cm²

Test Distance = 36 inches

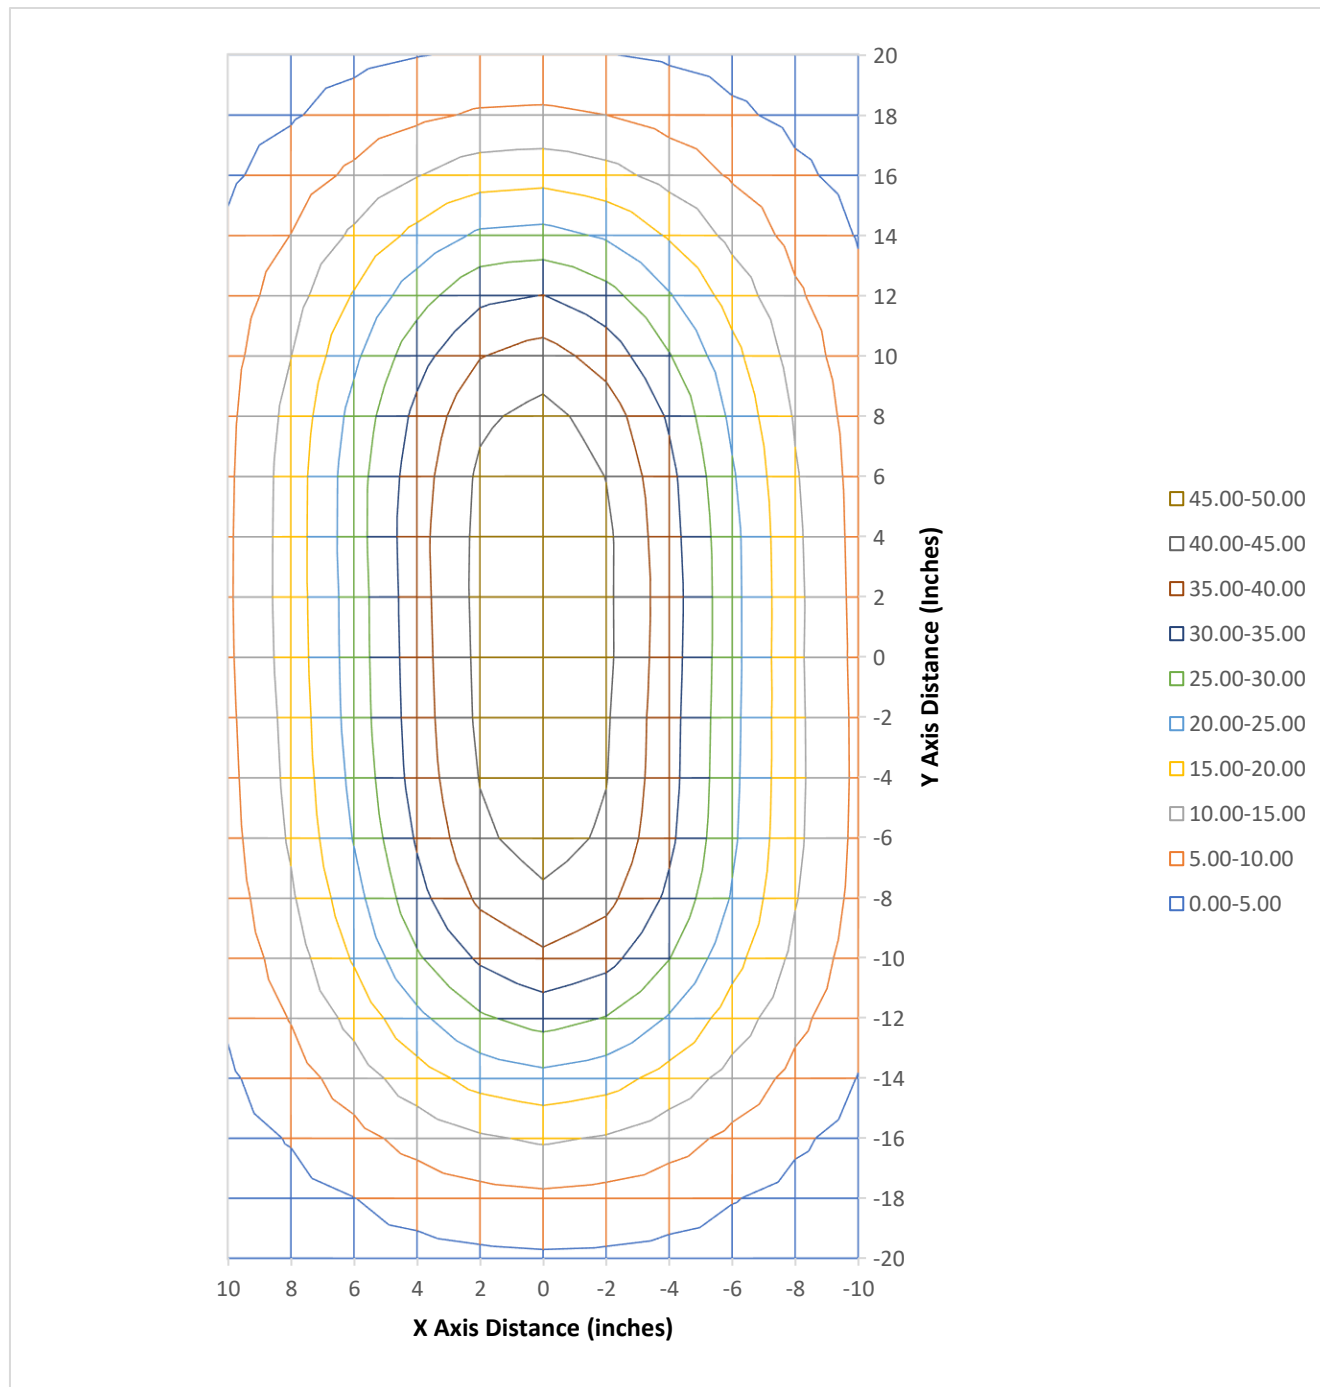



Report of Test


Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 36 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.90	1.33	1.93	2.39	2.72	2.74	2.45	2.10	1.64	1.14	0.74
18	1.44	2.33	3.34	4.27	4.97	5.03	4.68	3.78	2.78	1.86	1.13
16	2.23	3.67	5.28	6.93	8.14	8.37	7.61	6.18	4.51	2.87	1.70
14	3.01	5.11	7.67	10.03	11.96	12.07	11.05	8.88	6.35	3.97	2.32
12	3.75	6.47	9.85	12.99	15.51	16.14	14.51	11.51	8.38	5.18	2.96
10	4.36	7.66	11.66	15.51	18.20	19.20	17.27	13.81	10.11	6.30	3.49
8	4.67	8.43	13.01	17.08	20.35	21.42	19.59	15.79	11.28	7.13	3.99
6	4.83	8.80	13.64	17.83	21.18	22.46	20.50	16.82	12.10	7.58	4.21
4	4.86	8.78	13.64	18.07	21.31	22.76	21.11	17.02	12.46	7.82	4.23
2	4.83	8.81	13.32	17.89	21.44	22.71	20.97	17.15	12.53	7.86	4.31
0	4.80	8.77	13.32	17.80	21.21	22.51	20.97	17.03	12.50	7.72	4.35
-2	4.63	8.45	13.28	17.72	21.19	22.39	20.69	17.00	12.38	7.75	4.43
-4	4.52	8.29	12.86	17.59	20.90	22.05	20.53	16.91	12.26	7.75	4.50
-6	4.39	7.83	12.35	16.79	20.38	21.76	20.14	16.53	12.03	7.69	4.36
-8	3.98	7.31	11.32	15.63	18.99	20.04	18.94	15.48	11.56	7.28	4.16
-10	3.50	6.35	10.09	13.82	16.51	18.04	16.80	13.90	10.26	6.62	3.74
-12	2.86	5.21	8.11	11.14	13.60	14.57	13.48	11.22	8.23	5.48	3.15
-14	2.22	3.87	5.98	8.41	10.14	10.70	10.19	8.40	6.32	4.19	2.47
-16	1.55	2.62	4.04	5.45	6.58	7.19	6.72	5.64	4.24	2.83	1.73
-18	0.99	1.63	2.33	3.18	3.81	4.07	3.85	3.29	2.53	1.77	1.15
-20	0.63	0.95	1.31	1.67	1.95	2.06	2.00	1.77	1.40	1.02	0.70

Center Point Irradiance (600-700nm)	22.51 mW/cm ²
Average Irradiance (600-700nm)	10.27 mW/cm ²
Maximum Irradiance (600-700nm)	22.76 mW/cm ²
Minimum Irradiance (600-700nm)	0.63 mW/cm ²
Max/Min Ratio	36.11
Max/Avg Ratio	2.22
Target Area Radiant Power (600-700nm)	53.00 W





Report of Test

Test Report Number: LLIA002905-002

Irradiance (600-700nm) in mW/cm²

Test Distance = 36 inches

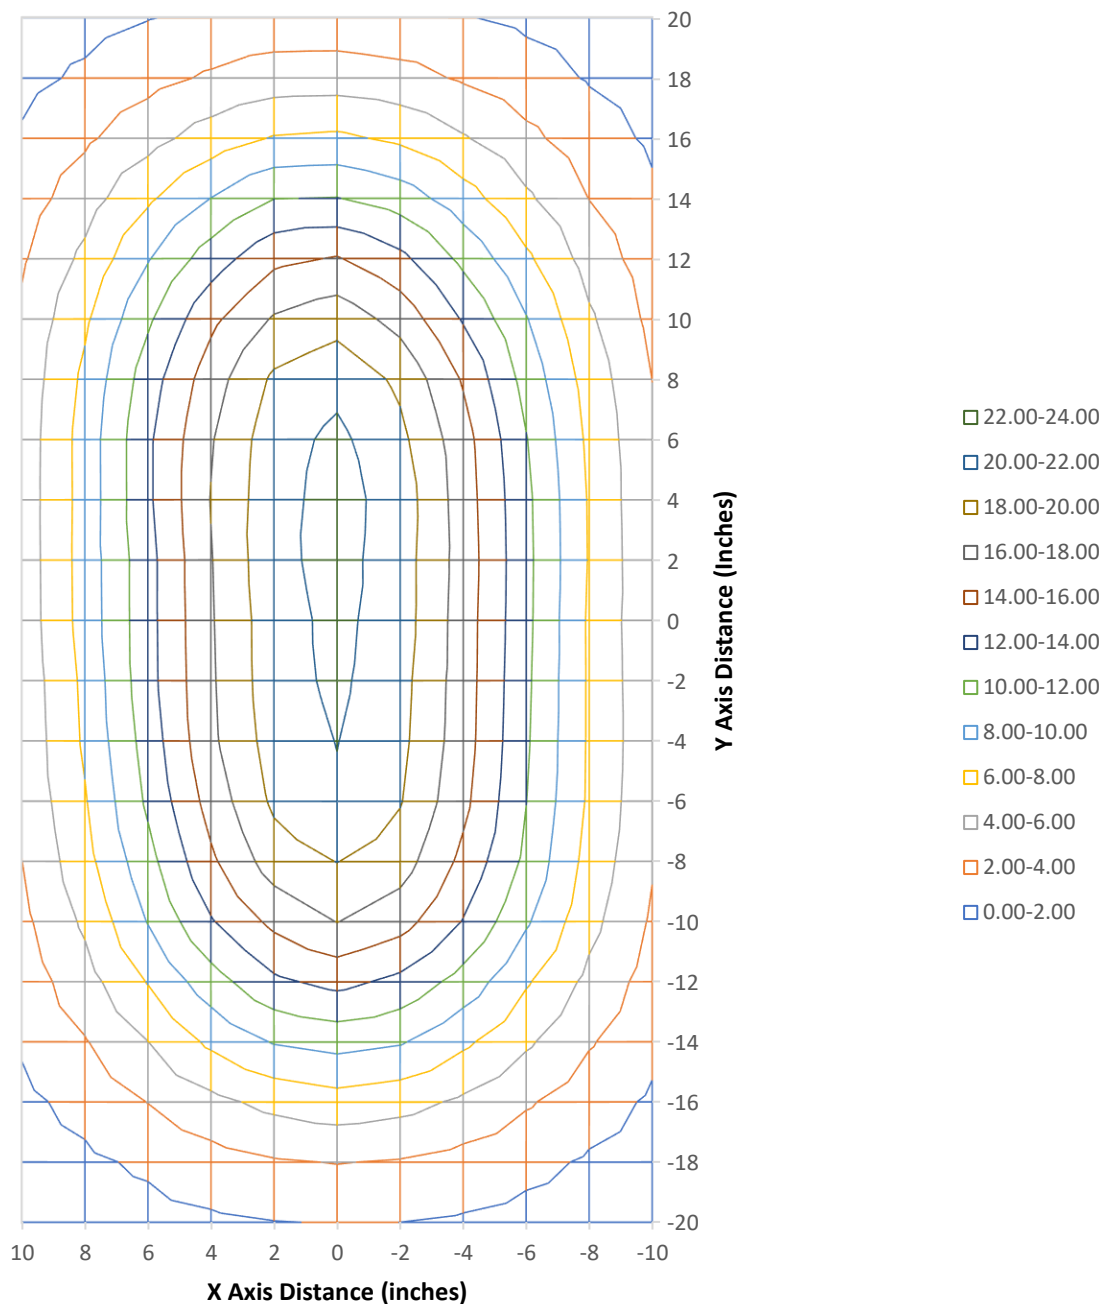



Report of Test


Test Report Number: LLIA002905-002

Irradiance (780-1700nm) in mW/cm²

Test Distance = 36 inches

Y Axis Distance (inches)	X Axis Distance (inches)										
	-10	-8	-6	-4	-2	0	2	4	6	8	10
20	0.84	1.25	1.81	2.35	2.73	2.84	2.60	2.17	1.59	1.09	0.75
18	1.29	2.12	3.43	4.54	5.42	5.63	5.12	4.10	2.92	1.92	1.14
16	1.88	3.43	5.53	7.55	9.13	9.50	8.67	6.81	4.74	2.94	1.68
14	2.62	4.77	7.87	10.92	13.38	13.89	12.84	10.20	7.00	4.21	2.32
12	3.25	6.08	10.11	14.32	17.54	18.23	16.57	13.35	9.16	5.40	2.88
10	3.71	6.96	11.82	16.86	20.72	22.03	19.88	15.87	11.00	6.37	3.30
8	4.02	7.72	13.01	18.46	22.76	24.25	22.24	17.84	12.18	7.11	3.65
6	4.15	8.07	13.51	19.13	23.79	25.45	23.47	18.82	12.96	7.59	3.86
4	4.26	8.18	13.58	19.47	24.04	25.56	23.98	19.21	13.47	7.81	4.03
2	4.33	8.17	13.56	19.44	24.01	25.76	24.10	19.51	13.51	7.97	4.11
0	4.25	8.02	13.49	19.30	24.06	25.85	24.12	19.45	13.56	7.99	4.23
-2	4.14	7.87	13.31	19.11	23.84	25.53	23.92	19.18	13.49	8.10	4.32
-4	3.94	7.67	12.95	18.77	23.39	25.30	23.74	19.11	13.41	8.14	4.30
-6	3.73	7.47	12.40	18.03	22.75	24.49	23.15	18.79	13.29	8.02	4.28
-8	3.48	6.70	11.40	16.96	21.13	23.04	21.61	17.79	12.53	7.72	4.13
-10	3.03	5.86	10.02	14.90	18.48	20.23	19.09	15.62	11.04	6.88	3.69
-12	2.54	4.83	8.11	12.16	15.08	16.64	15.65	12.84	9.09	5.64	3.04
-14	1.98	3.71	6.19	9.00	11.28	12.34	11.41	9.37	6.65	4.20	2.31
-16	1.44	2.58	4.19	6.06	7.46	8.20	7.54	6.20	4.44	2.83	1.61
-18	0.99	1.60	2.50	3.55	4.31	4.68	4.33	3.64	2.61	1.75	1.04
-20	0.65	0.93	1.29	1.66	1.99	2.18	2.10	1.81	1.39	1.01	0.70

Center Point Irradiance (780-1700nm)	25.85 mW/cm ²
Average Irradiance (780-1700nm)	11.16 mW/cm ²
Maximum Irradiance (780-1700nm)	25.85 mW/cm ²
Minimum Irradiance (780-1700nm)	0.65 mW/cm ²
Max/Min Ratio	39.56
Max/Avg Ratio	2.32
Target Area Radiant Power (780-1700nm)	57.60 W





Report of Test

Test Report Number: LLIA002905-002

Total Irradiance (780-1700nm) in mW/cm²

Test Distance = 36 inches

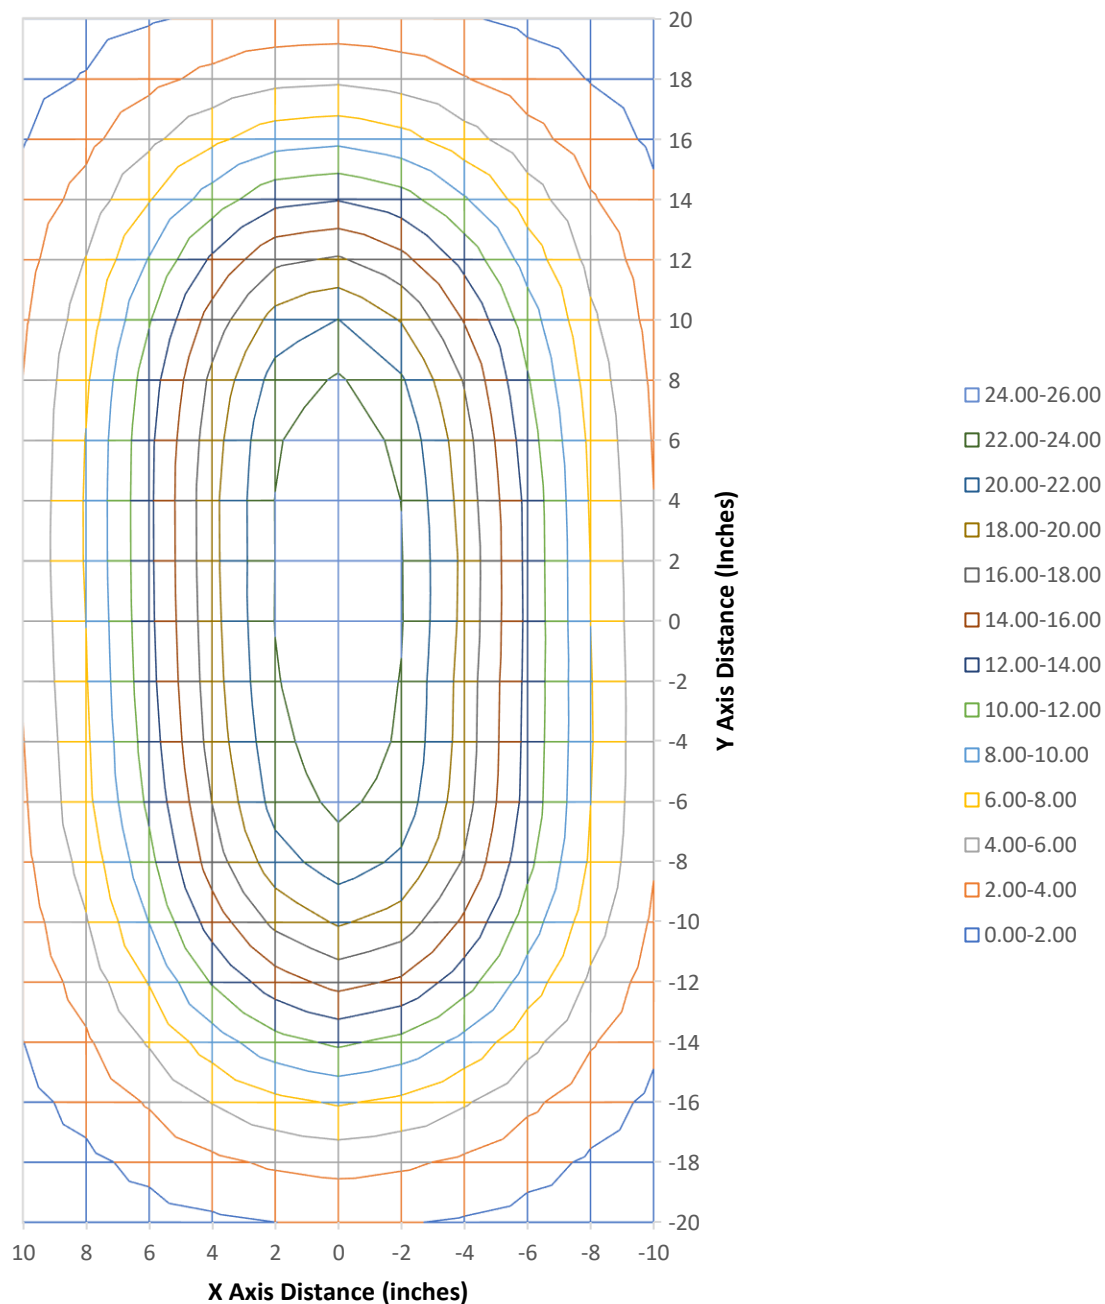



Test Report Number: LLIA002905-002

Test Equipment Configuration:	LightLab International Allentown Application Distance Measurement Grid Measurements acquired using spectral irradiance meters (350-1700nm) The rectangular scan method was employed using cartesian coordinates. No symmetry was applied to the results.
Test Procedure:	Tested in accordance with the applicable sections of: LM-91-22, LM-79-24, LM-58-20
Significance:	The laboratory has not participated in the selection of samples to be tested. All testing is performed on the understanding that the significance of the report is limited to the extent that the test sample is representative of production units.
Notes:	The measurements and other derived quantities contained in this report are based on the absolute data as measured. Prorating the performance of the sample for the use of other component combinations (such as lamp / LED / Ballast / driver), or for use in different environmental conditions than that tested, may produce erroneous results. This report is free of erasures and corrections This report may contain data that are not covered by the NVLAP accreditation. Quantities marked with ‡ are not covered. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.