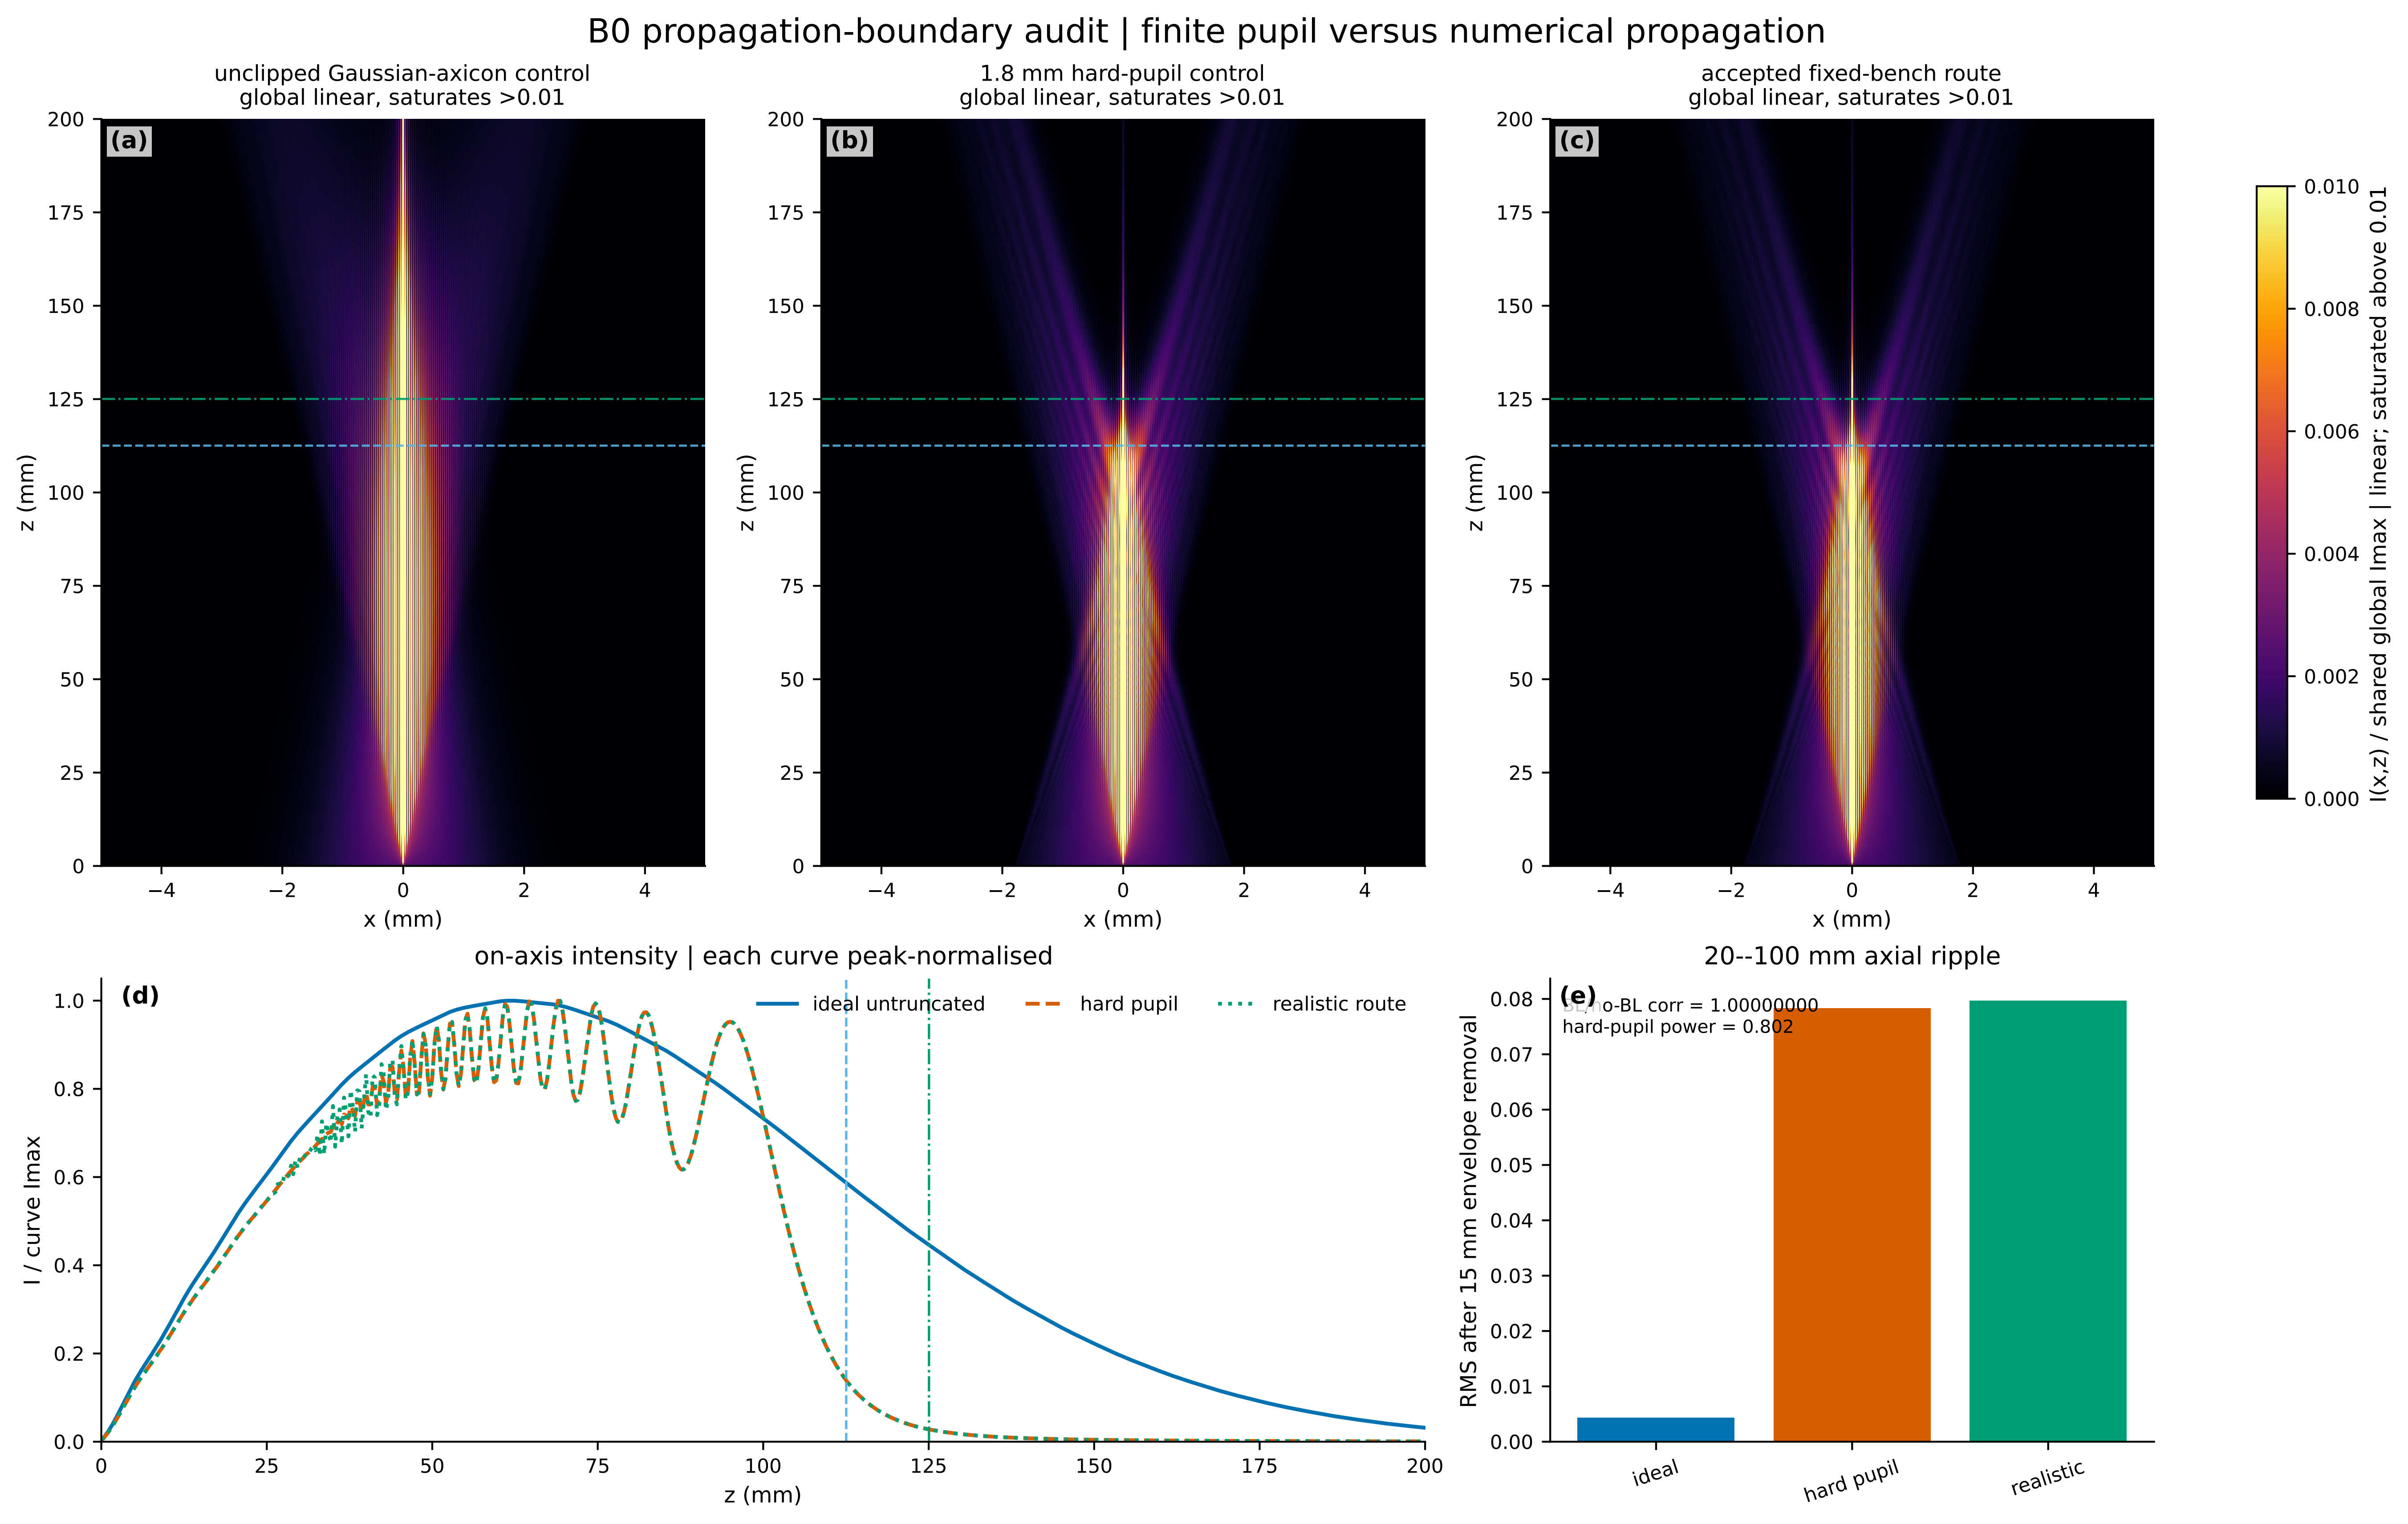
B0 propagation-boundary audit | finite pupil versus numerical propagation
unclipped Gaussian-axicon control
global linear, saturates >0.01
1.8 mm hard-pupil control
global linear, saturates >0.01
accepted fixed-bench route
global linear, saturates >0.01
(a)
(b)
(c)
z (mm)
x (mm)
I(x,z) / shared global Imax | linear; saturated above 0.01
on-axis intensity | each curve peak-normalised
(d)
ideal untruncated
hard pupil
realistic route
I / curve Imax
z (mm)
20--100 mm axial ripple
(e)
BL/no-BL corr = 1.00000000
hard-pupil power = 0.802
RMS after 15 mm envelope removal
ideal
hard pupil
realistic