

UNIVERSITY OF GHANA - LEGON



UNIVERSITY OF GHANA LEGON, ACCRA-GHANA

DEPARTMENT OF COMPUTER ENGINEERING

SCHOOL OF ENGINEERING SCIENCES

FINAL YEAR PROJECT REPORT

ON

AN IOT-ENABLED SMART DOOR FOR MONITORING BODY

TEMPERATURE AND FACE MASK DETECTION

BY

ANANG TITUS ADOTEI (10684996)

OWUSU SAMUEL NII (10680401)

EMMANUEL BOADU OKYERE (10674218)

THIS PROJECT REPORT IS SUBMITTED IN PARTIAL FULFILLMENT OF

THE REQUIREMENTS FOR THE DEGREE

BACHELOR OF SCIENCE IN COMPUTER ENGINEERING

SUPERVISOR: DR. NII LONGDON

SOWAH

2ND SEPTEMBER, 2021

AN IOT-ENABLED SMART DOOR FOR MONITORING BODY TEMPERATURE AND FACE MASK DETECTION

By

Owusu Samuel Nii – 10680401

Anang Titus Adotei – 10684996

Boadu Okyere .Emmanuel–10674218

Submitted to the Department of Computer Engineering in
Partial Fulfilment of the Requirements for the Degree of
Bachelor of Science in Computer Engineering
University of Ghana 6th
July, 2020.

Name of Student: Owusu Samuel Nii

Signature of Student: _____

Name of Student: Anang Titus Adotei

Signature of Student: _____

Name of Student: Boadu Okyere Emmanuel

Signature of Student: _____

Name of Supervisor: Dr. Longdon Nii Sowah

Signature of Supervisor: _____

Name of Head of Department: Dr. Godfred A. Mills

Signature of Head of Department: _____

DECLARATION OF ORIGINALITY

We certify that this thesis is our own work except where indicated by referencing. We also certify that we have read and understood the guidelines on plagiarism in the Computer Engineering undergraduate thesis handbook, including the University of Ghana's policy on plagiarism. We have acknowledged in the text of this thesis all sources used. We have also fully referenced including page numbers all the relevant texts, figures, data, and tables quoted from books, journals, articles, Internet websites, and works of other people. We have not used the services of any professional person or agency to produce this document. We have also not presented the work of any student present or past from other academic or research institutions. We understand that any false claim in respect of this thesis document will result in disciplinary action in accordance with the regulations of the University of Ghana.

We hereby declare that this thesis is solely our work under the supervision of the undersigned lecturer.

Student Name:

Index Number:

Student Signature: Date.....

Student Name:

Index Number:

Student Signature: Date.....

Student Name:

Index Number:

Student Signature: Date.....

Name of Supervisor:

Supervisor's Signature:Date.....

Abstract

The outbreak of the deadly COVID-19 virus has been a big worry to the world, and as a result there is the need to take precautions at every place. Because of the COVID-19 pandemic, wearing a mask is required in broad daylight spaces, as appropriately wearing a mask offers a greatest preventive impact against viral transmission. Body temperature has likewise become a crucial parameter in determining the health status of an individual. In public places where there are lots of crowd, it is very difficult to manually monitor and ensure every individual is abiding by the COVID 19 protocols. In this work, an IoT-enabled smart door that utilizes a machine learning model for checking body temperature and face mask detection. This proposed model can be utilized for any shopping center, lodging, airports, banks, apartment entrances and so forth. As a result, a cost-effective and reliable method of utilizing computer vision and sensors to build a healthy environment. The project comprises of an integration of hardware and software. The proposed system uses contactless infrared temperature sensors to measure the temperature of the individual at the entrance of the public places. Our system also implements real time deep learning models for face mask detection and classification. The module has three classification instances which includes; individuals who wear face mask properly, improperly and without a face mask using MobileNetV2, CNN and Tensor flow libraries using the transfer learning approach. Access is granted to the individual if the output from the temperature measurement module and the face mask detection module meet the acceptable threshold that is predetermined by the system. Also, the system is interfaced with a web application that keeps records of individuals for further control and monitoring.

ACKNOWLEDGEMENT

We first express our deepest gratitude to God Almighty who has given us grace and strength and without Him, our project will not be a success.

We also owe and express our deepest gratitude to our project supervisor, Dr. Robert A. Sowah who took keen interest in our project work and guided us all along, till the completion of our project work by providing all the necessary information for developing a fully functional system. We are also grateful for the emotional support he gave us at every point in time.

Furthermore, we are grateful to the entire staff of the Department of Computer Engineering, University of Ghana, for the unmeasurable amount of knowledge we gained throughout our stay at the University. The provisions made by the department in the form of internships, workshops and seminars have equipped us with technical knowledge and skills set as well as building confidence in ourselves.

We are grateful to all our colleagues who helped us in times of difficulty, and without their support, this project would not come into fruition.

We are grateful to our parents who provided us with the financial, moral support, and prayers that kept us in good shape throughout our undergraduate endeavors.

List of tables

Table 1: Review of Existing Systems.....	8
Table 2:Performance Evaluation of Our System against Existing Systems	41
Table 3: <i>Performance Metrics of Hardware Subsystem</i>	42
Table 4:Performance Metrics of Software system	44

List of figures

Figure 0-1: COVID 19 spread model	1
Figure 3.3-1 System Architecture.....	17
Figure 3.3-2 Flow diagram of the hardware subsystem	18
Figure 3.3-3: Flow diagram of the software subsystem	19
Figure 3.3-4 Architecture of the Convolutional Neural Network.....	22
Figure 3.4-1: Schematic diagram of the hardware system	26
Figure 3.5-1: Raspberry Pi 3b	27
Figure 3.5-2 IR Sensor	28
Figure 3.5-3 DHT11 SENSOR:.....	28
Figure 3.5-4 :Piezo Buzzer	30
Figure 4-2-0-1: Waiting for desktop application to request temperature scan	32
Figure 4-2-0-2: Temperature Device about to take a scan	33
Figure 4-2-0-3: Temperature sent successfully to the desktop application	34
Figure 4-2-0-4: Testing of API endpoing using Postman.....	35
Figure 4-0-5: Result when mask is not worn properly	35

Table of Contents

DECLARATION OF ORIGINALITY	iii
Abstract	v
ACKNOWLEDGEMENT	vi
List of tables	vii
List of figures	viii
Chapter 1 - Introduction	1
1.0 Background	1
1.2 Problem Definition	2
1.3 Project Objectives	3
1.4 Relevance of Project	3
1.5 Outline of the Thesis	3
Chapter 2 – Literature review	5
2.0 Introduction	5
2.1 Review of existing works	5
2.2 The proposed work	13
2.3 Scope of the project work	13
Chapter 3 - System design and development	14
3.0 Introduction	14
3.1 System overview and functions	14
3.1.1 The hardware subsystem	14
3.1.2 The software subsystem	14
3.2 Requirements, analysis and specifications	15
3.2.1 System Requirements	15
3.2.2 Functional Requirements	15
3.2.3 Non-functional requirements	16
3.3 System design and development process	17
3.3.1 System Architecture	17
3.3.2 Software subsystem	19
3.3.3 Methodology	19
3.3.4 Application Use Case Diagram	23
3.3.4 Activity Diagram	24
3.3.5 Database Design	25
3.4 System modelling	25
3.4.1 Schematic diagram	26
3.5 Development tools and material requirements	26
3.5.1 Material Requirements	26
3.5.2 IR Sensor	28

3.5.3 DHT11 SENSOR.....	28
3.5.4 Other Components Used.....	29
3.5.5 Development tools.....	30
Chapter 4 – Implementation and testing.....	31
4.0 Introduction	31
4.1 System implementation process	31
4.1.1 The general system implementation process	31
4.1.2 Hardware subsystem implementation process.....	31
4.1.3 Software subsystem implementation process	32
4.2 Testing and results.....	32
4.2.1 Hardware Subsystem	32
4.2.2 Software Subsystem	35
4.2.2.1 Testing Mask Detection Subsystem	35
4.3 Discussion of results and analysis	40
4.4 Performance evaluation and limitations of the system.....	41
4.4.1 Performance Evaluation	41
Chapter 5 – Conclusion and Recommendations.....	46
5.0 Introduction	46
5.1 Conclusions	46
5.2 Recommendations	46
5.3 Observations.....	46
6.0 References	48
APPENDICES	51
APPENDIX A- INTERFACES FOR DESKTOP APPLICATION	51
APPENDIX B – RASPBERRY PI CODE SNIPPETS FOR HARDWARE MODULE	54
APPENDIX C- CODE SNIPPETS FOR DESKTOP APPLICATION.....	55

Chapter 1 - Introduction

1.0 Background

The coronavirus disease also known as Covid 19, originated from Wuhan, China and has rapidly spread across several countries including Ghana. Living at home, working from home, self-driving, keeping away from affected cities are all possibilities for restricting the propagation of the virus. Individuals who have COVID-19 contamination can have a wide scope of indications, which range from gentle to extreme sickness. Indications of COVID-19 infection can show up from two to 14 days after openness to the infection. Fever, dry cough, sore throat, migraine, muscle strain, clog or runny nose, loose bowels, and drowsiness are the main normal symptoms of COVID-19. The significant ways for the infection's spread, as per WHO, are respiratory drops and actual contact between individuals. The respiratory droplets from one person who is in contact with the infected one can be transferred to other in different forms. As indicated by the World Health Organization(WHO), since December 2019, in excess of 114 nations experienced Covid 19 pandemic which has proclaimed as a dangerous illness that has intentionally contaminated more than 2.43 million deaths worldwide as on February 18, 2021. Figure 1 shows the COVID 19 spread model.

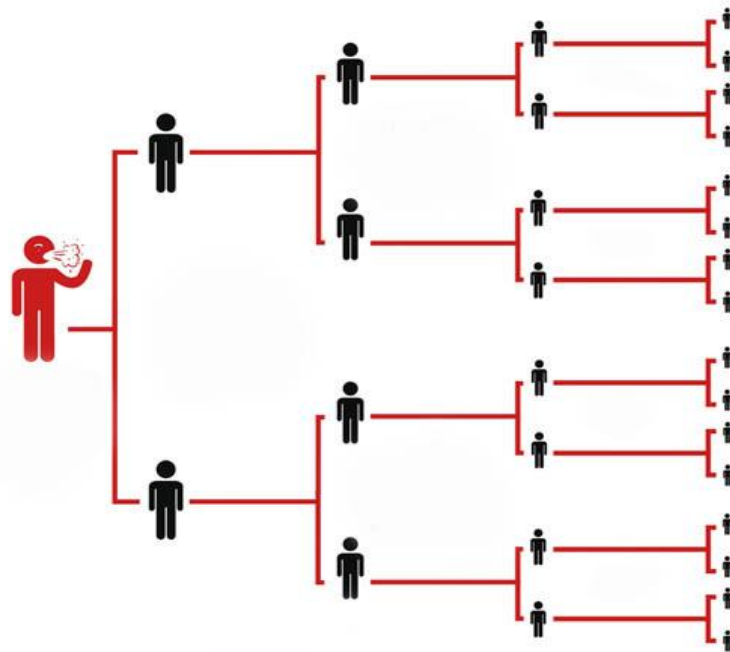


Figure 0-1: COVID 19 spread model

With an enormous populace and poor settlement in most towns, Ghana would experience difficulty

forestalling the spread of the Covid.19. In our part of the world, in our fight against covid 19 little advancements have been made in the provisions of enough vaccines to overcome the virus. Government carried out an assortment of security and wellbeing drives to lessen disease transmission, including social distancing, mandatory indoor mask-wearing, quarantine, restricting citizens' traveling within state boundaries and abroad, self-isolation, and the avoidance and abrogation of huge social events and gatherings. Technology has additionally assumed a basic part in aiding battle the spread of the infection. The use of thermometer guns, automated hand sanitor dispensers, disinfection tunnels, social distancing and contact tracing applications have demonstrated to be vital in the means taken towards battling the infection. Schools have additionally been compelled to use contactless form of teaching and learning by using online learning platforms. However, more can still be done with technology to help minimize the spread of the virus and help rid the world of this pandemic. So, in our proposed technique, we've created a mask recognition algorithm that can distinguish a wide variety of mask kinds and designs. With the help of computer vision, the deep learning algorithm is applied and the TensorFlow, Keras library of python is used for implementation. The Contactless Sanitization and Temperature Monitoring System are outfitted with a contactless Infrared Temperature Sensor MLX90614, an OLED show, Audio speaker module, Active IR sensor, TIP32C PNP Transistor, DC Water siphon, LED Indicators and Raspberry pi to detect determine whether a person's temperature is normal or abnormal. While a few measures are being taken at the State and Central level to battle the circumstance, it has become the need of great importance, basically for the functioning populace to get out of the solace of their homes to support their living and just as to determine the affordable irregularity. With these reasons on the front, the proposed model will absolutely assist with guaranteeing the security and wellbeing health of the multitude of representatives when directed in their associations.

1.2 Problem Definition

The COVID 19 disease has brought a national crisis with its deadly spread of over 95,000 confirmed cases across the country, according to the Ghana Health Service.

- a. Wearing of face masks is a main possible way of dealing with this pandemic.
- b. However, it is observed that some people still do not wear facemasks when visiting public places due to some inexcusable reasons and they end up exposing the general public to the potential spread of the virus.
- c. There is therefore a demand for automated intelligent systems that can provide effective surveillance at public places by ensuring people are always wearing their nose masks.

1.3 Project Objectives

1.3.1 General Objectives

- a. Provide an automated way of ensuring the wearing of nose masks at public places
- b. Check and monitoring the body temperature of individuals.
- c. Build a web application to keep records of individuals for purpose of contact tracing

1.3.2 Specific Objectives

- a. Build a facial detection system that is able to detect a face from a scene using transfer learning
- b. Use of computer vision techniques to identify faces with or without nose masks
- c. Measure the temperature of individuals using IR temperature sensors
- d. After processing, send a signal to the door control mechanism to indicate whether the door should be opened or closed
- e. Transfer data of individuals from the IoT system to the web application.

1.4 Relevance of Project

This project seeks to minimize the rate of spread of the corona virus by providing IoT based contactless automated temperature, face mask detection and enforcement systems at a minimal cost.

1.5 Outline of the Thesis

This report is divided into five (5) chapters. A description of each chapter is as shown below: Chapter 1 presents the introductory background of an IoT-enabled smart doors for monitoring body temperature and face mask detection, and how our proposed system aids in combatting this deadly virus. This chapter also focuses on the motivation behind our proposed system, the relevance of this project and the objectives of our proposed system.

Chapter 2 focuses on a review of existing systems to recognize the work previously done while evaluating their strengths and shortcomings and identifying existing gaps to make vital enhancements in this project.

Chapter 3 outlines the methodology of the design and development of the whole system.

Chapter 4 shows the ways in which the individual components were integrated and tested by various performance evaluation methods.

Chapter 5 presents the conclusions of the system development efforts. It captures the challenges faced in the various system design stages as well as key recommendations.

Chapter 2 – Literature review

2.0 Introduction

IoT is being utilized in different fields, similar to control and observing mechanical, electronic, keen security, and medical services frameworks. In this part, we depicted different IoT-based frameworks, in which the creators proposed various procedures for various fields of life to work on the expectations for everyday comforts. Starting in December 2019, the abrupt new sort of Covid pneumonia (COVID-19) immediately seethed across China and surprisingly the world [1]. As of July 15, 2020, more than 13.65 million affirmed cases have been accounted for in excess of 220 nations and districts all throughout the planet, and in excess of 580,000 patients have kicked the bucket. As of now, it is as yet proceeding to spread for a huge scope [2]. The new sort of Covid is exceptionally irresistible. It tends to be spread through contact, droplets, aerosols and different carriers noticeable all around, and it can get by for 5 days in a reasonable climate [3]- [4]. The "Rules for the Prevention of New Coronavirus Infection Pneumonia" given by the Public Health Commission accentuated that when people go out to public spots, look for clinical treatment and take public transportation, they need to wear face masks or N95 masks to forestall the spread of the infection. Along these lines, it is everybody's obligation to wear masks out in the open spots during the pandemic, yet this requires the cognizant consistence of the individual, yet additionally the reception of specific measures to direct and oversee. As of now, in spite of the fact that there is no algorithm explicitly applied to face mask wearing detection, with the advancement of deep learning in the field of computer vision [5-7], neural network based objective identification calculations are utilized in common objective recognition, face detection, and remote detecting picture targets. Location, clinical picture, location and regular scene text identification are generally utilized in fields [8]- [11]. Face recognition calculations depend on a serious level of acknowledgment exactness, and have tremendous application potential in homeroom participation, character confirmation, access control frameworks, login and opening, and online media stages [12].

2.1 Review of existing works

 Temperature and Mask Scanning System by Uzma Takrim¹, Farinnaj Sheikh, Nahid Sheikh, Masarrat Bano, Sanhita Hazra

Uzma Takrim et al [13] developed an IoT system that automates the process of Temperature Check-ups using Facial Land marking and Contactless IR Temperature Sensor and Mask Detection using Deep Learning Neural networks. Their system measures the human temperature of a person as well as scans persons to detect the wearing of nose masks or not. If it detects a person without nose mask

approaching the camera sensor, the body temperature is displayed on an LCD and an alarm is sounded to warn and remind the person of not wearing a mask. Also if a temperature close to fever temperature is detected, the camera makes a quick response and informs the officer by an alarm message.

🌈 Face Mask Detection Alert System using Raspberry Pi by Meghana Shinde¹, Tanvi Sukhadare, Soham Vaidya, Prof. Meghali Kalyankar [14].

Meghana Shinde¹, Tanvi Sukhadare, et al [14] developed a facial mask detection alert system using raspberry pi which distinguishes whether an individual has worn a face mask or not. Their system detects faces using a pi camera input and also detects if a person has worn face mask or not. If face mask policy is breached, an email alert with message and screenshot is sent to the officers in charge. Also, their system keeps records of screenshots of all “no mask” instances in the storage device of the raspberry pi.

🌈 Design of an IoT Based Independent Pulse Oximetry kit as an early detection tool for Covid-19 Symptoms [15].

Development of pulse oximetry devices using IoT technology [4] as devices for real time monitoring of covid infected persons via smartphones with regards to them obeying the physical and social distancing protocols was used to keep track of the body temperature of the individuals.

🌈 Deep learning implementation of face mask and physical distancing detection with alarm systems by Sammy V. Militante, Nanette V. Dionoso [16].

Implementation of face detection with alarm system for social distancing using deep learning techniques using CNN is discussed in [5]. Sammy V. Militante et al introduced a high accuracy algorithm to be used for detecting face masks fully based on CNN, binomial cross-entropy and gradient descent.

🌈 A hybrid deep transfer learning model with machine learning methods for face mask detection in the era of the COVID-19 pandemic by Loey, M.; Manogaran, G.; Taha, M.H.N.; Khalifa, N.E.M.

The authors of [17] proposed a mixture model for face mask detection. Three datasets are utilized, which are the Simulated Masked Face Dataset (SMFD), the Real-World Masked. Face Dataset (RMFD), and the Labeled Faces in the Wild (LFW). Their proposed model comprises of two

sections. The initial segment depends on ResNet-50 for the feature extraction from the picture, while the subsequent part is for the arrangement of either a face mask or without a face mask. The three algorithms are utilized for the characterization, which is Support Vector Machine (SVM), decision tree, and ensemble algorithm. The SVM algorithm accomplished the most noteworthy precision of close to 100% exactness on the LFW dataset.

 IoT-Based system for covid-19 indoor safety monitoring by Nenad Petrovic and Dorde Kocic
Nenad Petravoic and Dorde Kocic [18] proposed a system of which their solution consisted of a temperature measurement subsystem based on Adruino Uno, computer vison subsystem for mask detection and social distancing check based on Raspberry pi 3 and smartphones application for security guards. They relied on Adruino Uno equipped with infrared thermometer to monitor the temperature of Indi duals entering the building. Arduino sends a signal to open the door if the temperature of the individual does not exceed the threshold value of the temperature set by the system. Their system also informs the security guards about the location of people not wearing nose mask through the mobile application.

 An Automated System to Limit COVID-19 Using Facial Mask Detection in Smart City
Network by Mohammad Marufur Rahman, MD. Motaleb Hossen Manik , Md Milon Islam ,
Saifuddin Mahmud

The authors of [19] proposed an automated smart system for checking persons who are not wearing nose mask. CCTV cameras are used to capture images from public spaces, and these images are input into the system that detects if a person inside the image is without a facemask. If true, information about the person is sent to the proper authority for necessary actions to be taken.

2.1.8 An IoT-Based System for Automated Health Monitoring and Surveillance in Post-Pandemic Life [20]

Amir Fotovwat, Mohammed Reza Mohebbian et al [9] developed a COVID-SAFE platform relies that is made up of three segments which include a wearable IoT device, smartphone app and a cloud server. The software phase includes an Application Program Interface (API) which provides a platform for interacting with the users on a smartphone and a fuzzy decision making system installed on the cloud server. The hardware phase is made up of nodes developed on a Raspberry Pi Zero which collect specific vital data from the users and send to the decision making system. Advices such as the need to see a doctor, to maintain physical distance from others and avoidance of high risk

areas are then sent to the user through the API.

Below is a table that identifies the strengths and weaknesses of the various works we used in developing our system

Table 1: Review of Existing Systems

Existing System	Title and Authors of the papers	The methodology employed	Strength(s)	Weakness(es)
Existing system [13]	Temperature and Mask Scanning System by Uzma Takrim, Farinnaj Sheikh, Nahid Sheikh, Masarrat Bano, Sanhita Hazra	Their system measures the human temperature of a person as well as scans persons to detect the wearing of nose masks or not.	The system makes use of a contactless temperature scanner and a mask monitor to determine if a person is granted access or not.	The system cannot determine if a person is correctly wearing a nose mask or not.
Existing system[14]	Face Mask Detection Alert System using Raspberry Pi by Meghana Shinde, Tanvi Sukhadare, Soham Vaidya, Prof. Meghali Kalyankar .	Their system detects faces using a pi camera input and also detects if a person has worn face mask or not. If face mask policy is breached, an email alert with message and screenshot is sent to the officers in charge. Also, their system keeps records of screenshots of all “no mask” instances in the storage device of the	Their system used MobileNetV2 and the Single Shot Detector(SSD) model to train the dataset and it gives better accuracy for simple masked face recognition	Their system is not able to detect people with high temperatures.

		raspberry pi.		
Existing System [15]	Design of an IoT Based Independent Pulse Oximetry kit as an early detection tool for Covid-19 Symptoms .	Development of pulse oximetry devices using IoT technology [4] as devices for real time monitoring of covid infected persons via smartphones with regards to them obeying the physical and social distancing protocols was used to keep track of the body.	Their proposed system can be used to monitor covid-19 patients through smartphones/PC with regards to physical and social distancing protocols.	The system does not yet have a system that can be analyzed in real time and keep records of the measurements from the patients.
Existing system [16]	Deep learning implementation of face mask and physical distancing detection with alarm systems by Sammy V. Militante, Nanette V. Dionoso [4].	Implementation of face detection with alarm system for social distancing using deep learning techniques using CNN is discussed in [5]. Sammy V. Militante et al introduced a high accuracy algorithm to be used for detecting face masks fully based on CNN, binomial cross-entropy and gradient descent	Their system used deep learning technique like Keras and CNN which obtain an azzuracy of 97.87% when detecting a paeson wearing face mask and 98.75% when detecting person without face mask	Their system lacked a temperature detection system and as a result it cannot check whether a person has high fever or not which is a mild symptom of the disease
Existing	A hybrid deep	Their proposed model	Their proposed	The system does

System [17]	transfer learning model with machine learning methods for face mask detection in the era of the COVID-19 pandemic by Loey, M.; Manogaran, G.; Taha, M.H.N.; Khalifa, N.E.M.	comprises of two sections. The initial segment depends on ResNet-50 for the feature extraction from the picture, while the subsequent part is for the arrangement of either a face mask or without a face mask. The three algorithms are utilized for the characterization, which is Support Vector Machine (SVM), decision tree, and ensemble algorithm. The SVM algorithm accomplished the most noteworthy precision of close to 100% exactness on the LFW dataset.	system archived 100% testing accuracy and was able to identify faces with or without nose mask.	not yet have a system that can be analyzed in real time and keep records of the measurements from the patients.
Existing system [18]	IoT-Based system for covid-19 indoor safety monitoring by Nenad Petrovic and Dorde Kocic	They relied on Arduino Uno equipped with infrared thermometer to monitor the temperature of Individuals entering the building. Arduino sends a signal to open the door if the temperature of the individual does not	Their system was able to do a social distancing check and it is interfaced with an application which keeps records of temperatures measured and alert the security guards	Their system lacked a temperature detection system and as a result it cannot check whether a person has high fever or not which is a

		exceed the threshold value of the temperature set by the system. Their system also informs the security guards about the location of people not wearing nose mask through the mobile application.	of the location of individuals who do not meet the system's requirements	mild symptom of the disease
Existing system [19]	An Automated System to Limit COVID-19 Using Facial Mask Detection in Smart City Network by Mohammad Marufur Rahman, MD. Motaleb Hossen Manik, Md Milon Islam, Saifuddin Mahmud	The authors of [8] proposed an automated smart system for checking persons who are not wearing nose mask. CCTV cameras are used to capture images from public spaces, and these images are input into the system that detects if a person inside the image is without a facemask. If true, information about the person is sent to the proper authority for necessary actions to be taken.	Their system achieved a high accuracy of 99.4%	The system does not yet have a system that can be analyzed in real time and keep records of the measurements from the patients.
Existing System[20]	An IoT-Based System for	Amir Fotovwat, Mohammed Reza	he IoT node tracks health parameters,	Their system lacked a

	Automated Health Monitoring and Surveillance in Post-Pandemic Life	Mohebbian et al [9] developed a COVID-SAFE platform relies that is made up of three segments which include a wearable IoT device, smartphone app and a cloud server. The software phase includes an Application Program Interface (API) which provides a platform for interacting with the users on a smartphone and a fuzzy decision making system installed on the cloud server. The hardware phase is made up of nodes developed on a Raspberry Pi Zero which collect specific vital data from the users and send to the decision making system. Advices such as the need to see a doctor, to maintain physical distance from others and avoidance of high risk areas are then sent to the user	including body temperature, cough rate, respiratory rate, and blood oxygen saturation, then updates the smartphone app to display the user health conditions. The app notifies the user to maintain a physical distance of 2 m (or 6 ft), which is a key factor in controlling virus spread.	temperature detection system and as a result it cannot check whether a person has high fever or not which is a mild symptom of the disease
--	--	---	---	---

Existing system[21]	IoT- Enabled smart doors for monitoring Body temperature and face mask detection by B Varshini, HR Yogesh, Syed Danish Pasha, Maaz Suhail, V Mashumitha, Archana Sasi	Their system measures the human temperature of a person as well as scans persons to detect the wearing of nose masks or not.	The system makes use of a contactless temperature scanner and a mask monitor to determine if a person is granted access or not.	The system does not yet have a system that can be analyzed in real time and keep records of the measurements from the patients.
---------------------	---	--	---	---

2.2 The proposed work

This project aims to develop an IoT- enabled smart doors for monitoring body temperature and face mask detection system is to contain the spread of Covid-19 in public places such as shopping malls, offices, airports, banks and so on. The system can check an individual's body temperature and can perform face mask detection. The system is also interfaced with a web application that keeps records of individuals for further control and monitoring.

2.3 Scope of the project work

The study in this paper focuses on developing a real time IoT enabled smart door for temperature and face mask detection with an additional desktop application for monitoring real time data from the system.

Chapter 3 - System design and development

3.0 Introduction

A general approach to deal with our design is the integration of the face mask detection module and temperature detection module on to a raspberry pi which automates the opening of the door and also a web app which keep records of an individual for further control and monitoring.

3.1 System overview and functions

The system primarily comprises of 2 main subsystems, which are:

- i. The hardware subsystem
- ii. The software subsystem

3.1.1 The hardware subsystem

The hardware subsystem comprises of a raspberry pi, raspberry pi camera, an IR sensor, a temperature sensor and servo motor. The IR sensor is used to detect proximity of people to the device and the temperature sensor is used to measure the temperature of the person. These measurements are recorded and sent to a local server.

3.1.2 The software subsystem

The software subsystem consists of two subsystems. The first subsystem is a face mask detector application developed using CNN, MobileNetV2, AI and Machine learning technologies. This application is interfaced with a camera to detect if a person walking in is wearing a mask, not wearing a mask, or wearing it wrongly. This information is also stored in the local server.

The second subsystem is a desktop application that was developed using Pycharm. The front end was developed using the PyQt6 framework and the back end was developed using Django. The application is meant to be used by only administrators. The administrator can view the current global covid 19 statistics, the temperature and mask status of all persons who use the facility and also make decisions on which people to isolate and quarantine.

The software subsystem consists of a web application that is developed using Visual Studio code. The front end was developed using the react JS framework and the back end is developed based on the express JS framework. Users of the web application can view the location of the shuttle via Google maps and pay their shuttle fares using either mobile money or credit card. The credentials of

users that is used for authorization are stored in a firebase database.

3.2 Requirements, analysis and specifications

3.2.1 System Requirements

- i. The system to be developed must be able to:
- ii. Detect faces with mask, without mask and improper wearing of face masks using raspberry pi camera.
- iii. Transfer the pictures taken with the raspberry pi camera to a cloud server.
- iv. Monitor the body temperature of an individual entering the premises.
- v. Automate the opening of doors after detecting faces with mask and monitoring the body temperature.
- vi. Display all the collected data from the cloud on the dashboard in the desktop application.

3.2.2 Functional Requirements

- vii. Temperature measurement

The system should be able to measure the temperature of the individuals within the specified range of distance from the device.

- viii. Face mask detection

The system should be able to detect faces from the video frame. Subsequently, it should be able to detect faces with proper mask, improper wearing of mask and faces without face mask.

- ix. Smart door automation

The system should be able to determine whether to open the door or not based on temperature and mask status of the individual.

- x. Send real time measurement data to the cloud server.

After temperature and mask status are recorded, they should be sent to the cloud server.

- xi. User authentication

The system should verify the identity of the administrator when he or she logs in the desktop application. This is done by the MySQL authentication service since the credentials of our users is stored in a MySQL database.

- xii. Display the information from the cloud server on the dashboard of the desktop application.

The desktop application should retrieve data from the cloud server and display on the dashboard.

3.2.3 Non-functional requirements

xiii. Performance

The system has a short response time which means the hardware tracker is able to send the coordinates quickly and the web application is also able to receive the information from the database server quickly due to the efficient and optimal nature of the queries for these processes.

xiv. Reliability

The system is available to be used by the user all the time due to how the software and hardware subsystems are structured. This will make it the system to be user-friendly and be able to be used anytime during the day.

xv. Scalability

The system adapts to the changing needs and demands of the users. Due to the versatility of our system and the fact that more people will be using our system and also be requesting more services, adequate resources have been provided so that users can use our system.

xvi. Security

The system uses encryption to secure user data. Since our user data and system data are stored in a database, SQLite has security rules that protect data from being edited or changed.

3.3 System design and development process

3.3.1 System Architecture

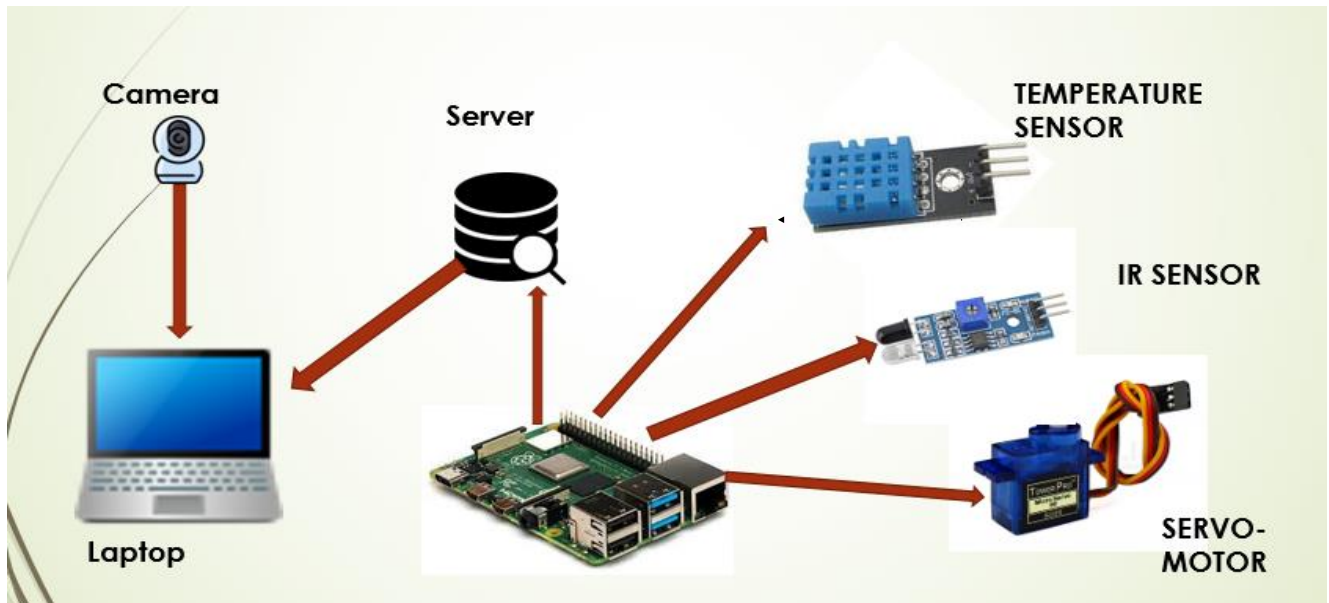


Figure 3.3-1 System Architecture

From the schematic above, the desktop application and the hardware temperature measurement system are connected using a server socket connection so they can communicate with each other. The Raspberry Pi 3b microprocessor controls the activities of the various sensor modules. The microprocessor obtains the temperature reading of a person when the hand is placed a few centimeters away from the infrared sensor. This data is then sent to the server through server socket connection. The server then feeds the desktop application with this data and it is displayed on the dashboard.

Flow diagram for hardware subsystem

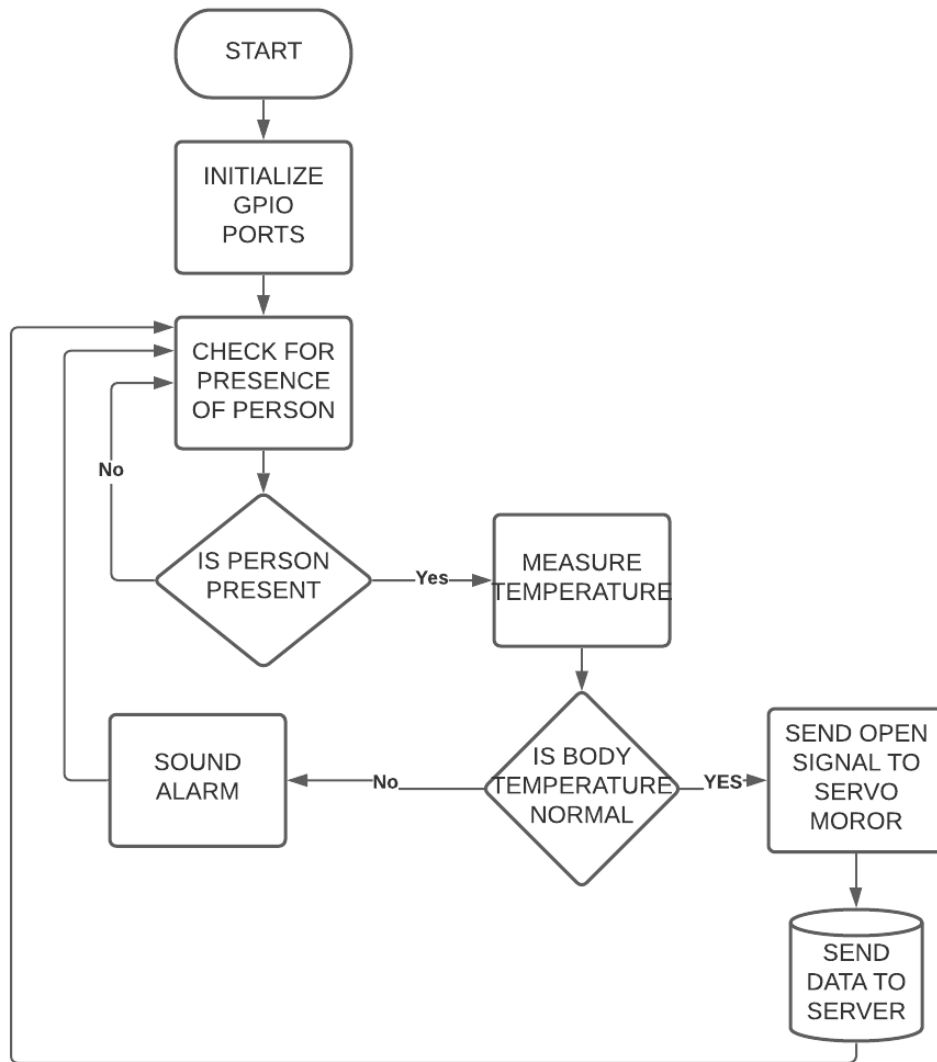


Figure 3.3-2 Flow diagram of the hardware subsystem

From the diagram above, when the hardware program starts running, all GPIO ports are initialized. The IR sensor continuously checks for the presence of a human being. If detected, the temperature of the person is measured. If the temperature reading is higher than the normal body temperature which is between 30 to 37 degree Celsius, an alert is sounded by the system and person is denied access to the building. If the reading however is within the healthy range, the door is opened through the servo motor and the temperature reading is sent to the server to be displayed in the desktop application.

3.3.2 Software subsystem

The software subsystem was developed in two modules, namely the machine learning module for detection of face masks and the desktop application module for overall operation of the system.

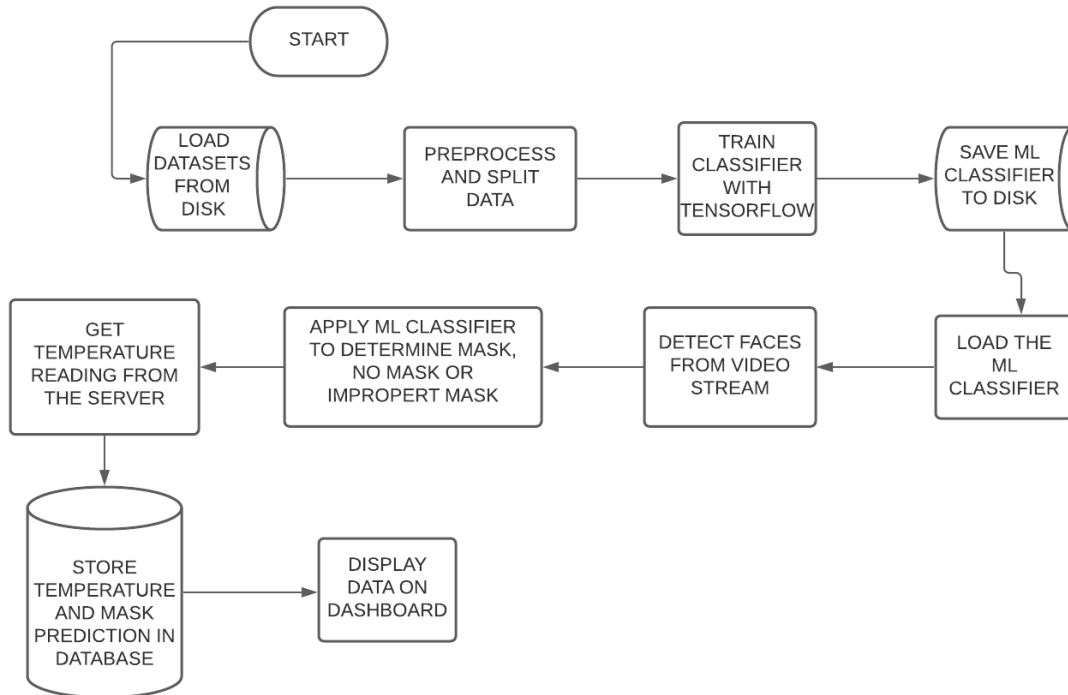


Figure 3.3-3: Flow diagram of the software subsystem

3.3.3 Methodology

Loading of Face Mask Datasets

The dataset, used for this project was accessed on the the Kaggle data repository. It has three different classes which include people with nose masks, people with no nose masks and people who wear masks improperly. In total the dataset consists of 2000 images of people wearing masks, 2000 images of people not wearing masks and 2500 images of people not wearing masks properly. The total number of images for this dataset sums up to 6,500 images. Figures 3.1,3.2 and 3.3 show samples of people wearing masks, people not wearing masks and people wearing masks improperly. In our dataset, people who had masks on were labelled with a class 0, people with no masks were labelled with class 1 and people with improper nose masks were labelled with class 2. This dataset was used training our classification model using transfer learning. Figure 7 shows the distribution of the total number of different categories of the dataset.

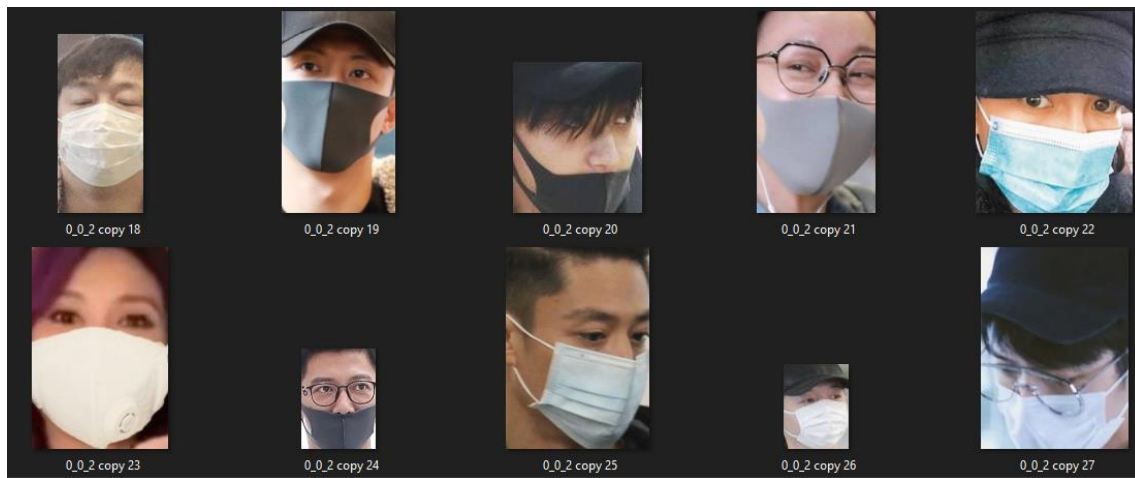


Figure 3.3-4: Sample of with mask dataset

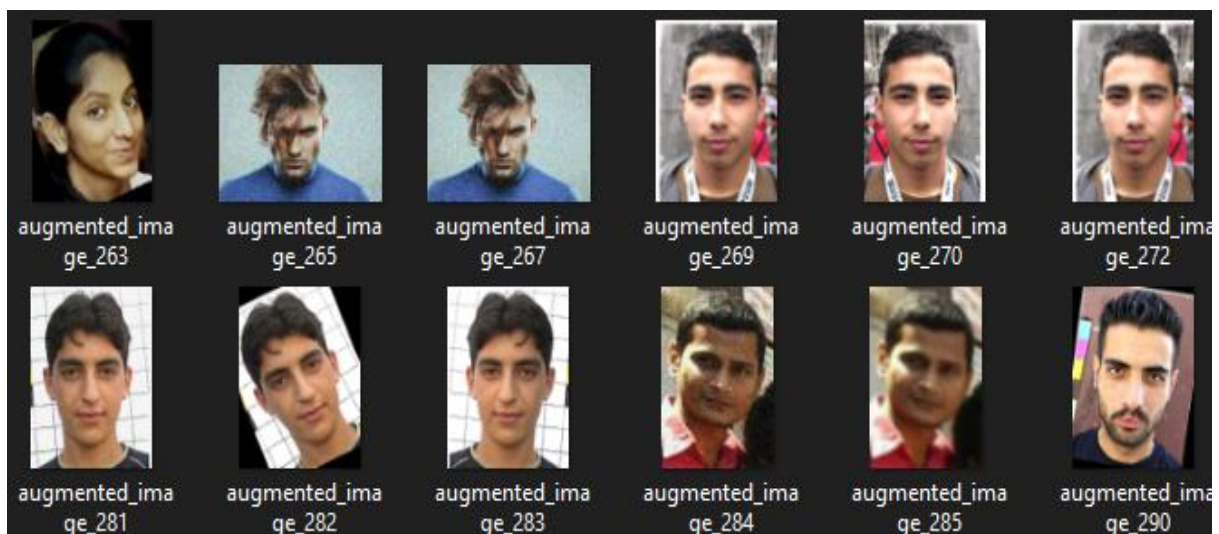


Figure 3.3-5: Sample of faces without mask dataset.

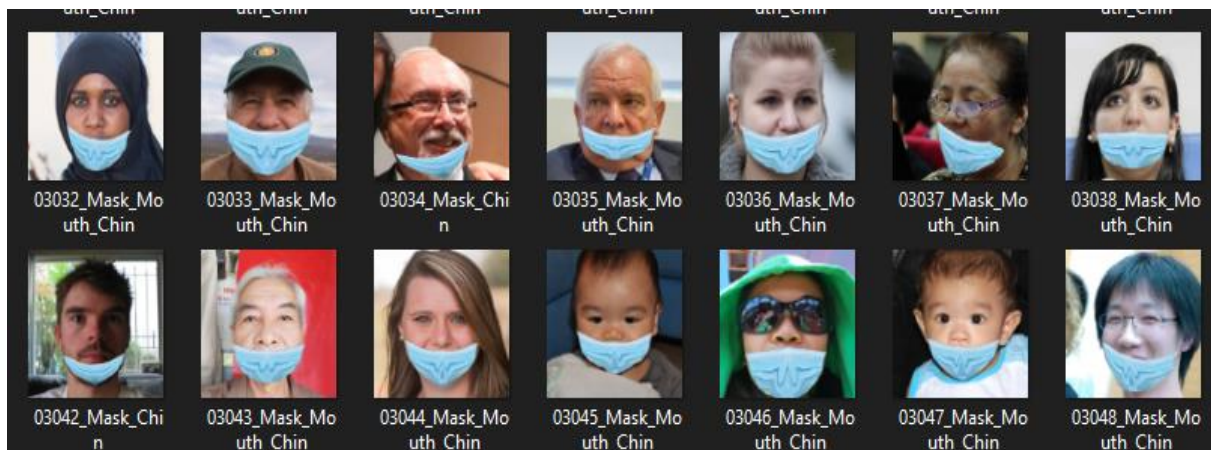


Figure 3.3-6: Sample of faces with improper mask dataset.

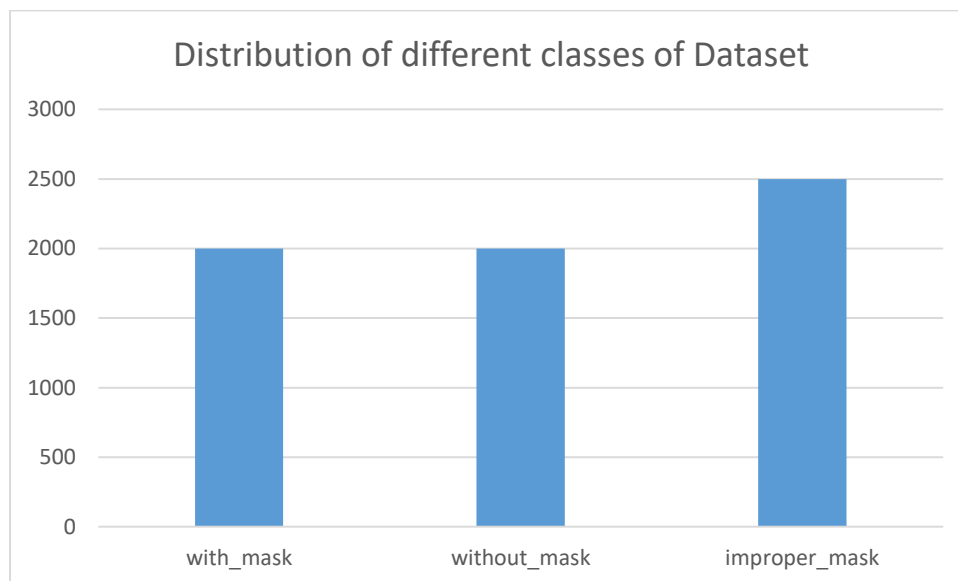


Figure 3.3-7: Distribution of different classes of Dataset

- Data pre-processing

Performing data pre-processing is very critical and necessary in machine learning as it improving the quality of data which helps the extraction of important features from the data. It involves getting the data cleaned and organised so they can be used for building and training a model. For the entire dataset, all images were converted to grayscale. This was necessary so as to simplify the algorithm as well as reduce the computational power involved in extracting the desired features from the images.

- Training

We utilized pre-trained deep learning models, which are MobileNetV2, and Convolutional

Neural Network (CNN), to detect a face with proper mask, face with an improper mask, and face without mask. We set the output layer of these models as non-trainable by freezing the weights and other trainable parameters in each layer to not be trained or updated when we feed our dataset. Further, we added an output layer to train on our dataset. This output layer would be the main trainable layer in our new model. We utilized the Adam optimizer with a learning pace of 0.001, cross-entropy for our misfortune, and exactness for our grid. After building the model, we label three probabilities for our results. ['0' as 'with mask', '1' as without mask, and '2' as 'improper mask']

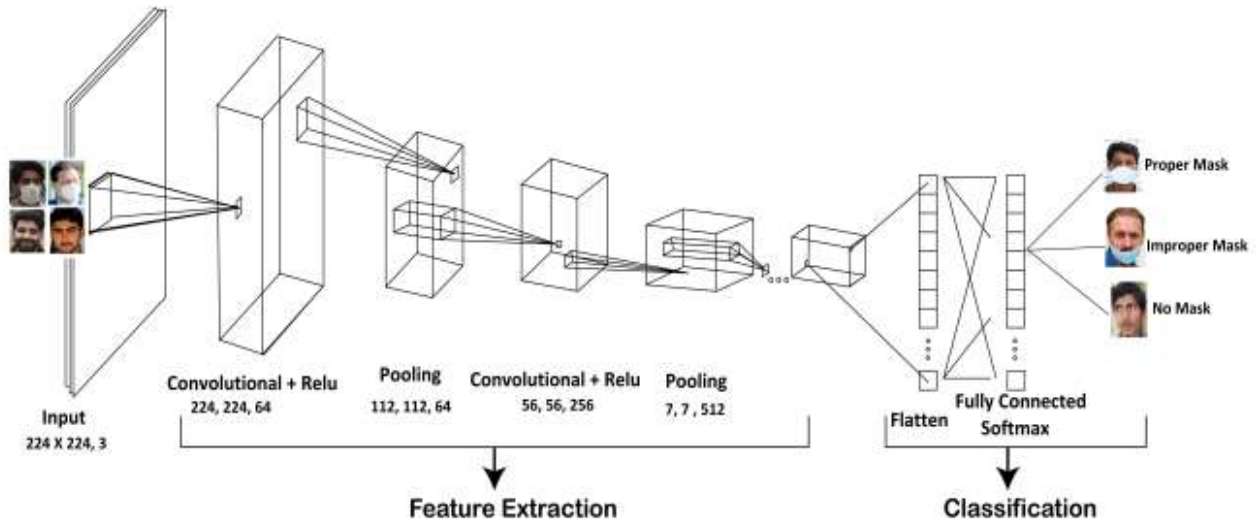


Figure 3.3-4 Architecture of the Convolutional Neural Network

The architecture of the CNN is made up of an input layer, an output layer, and multiple hidden layers. The hidden layers characteristically consist of convolution layers, pooling layers, fully connected layers and normalization layers (Relu). For this network, the input are the images of people with mask, without mask and with improper mask with a sizes of 224 by 224 and three RGB channels.

We have our first layer of the CNN as a convolutional layer with the Relu function defined below with a kernel size of 224 x 224

$$Relu(x) = \max(0, x)$$

The next layer of the architecture is max pooling which includes contracting the image stack. To pool a picture, the window size is characterized as (112 x 112, 64 output channels). This window is then sifted across the strides' structure, with the value being recorded for each window.

We have a flattened layer with a fully connected layer with the softmax function shown below

$$p_i = \frac{e^{x_i}}{\sum_j e^{x_j}}$$

where x_i is the total input received by unit i and p_i is the prediction probability of the image belonging to class i . In this layer, all values give a prediction of which class the input image belongs to.

- SERIALIZE THE MODEL

After training our model, we serialized it and saved it to our local disk to be used by the desktop application.

3.3.4 Application Use Case Diagram

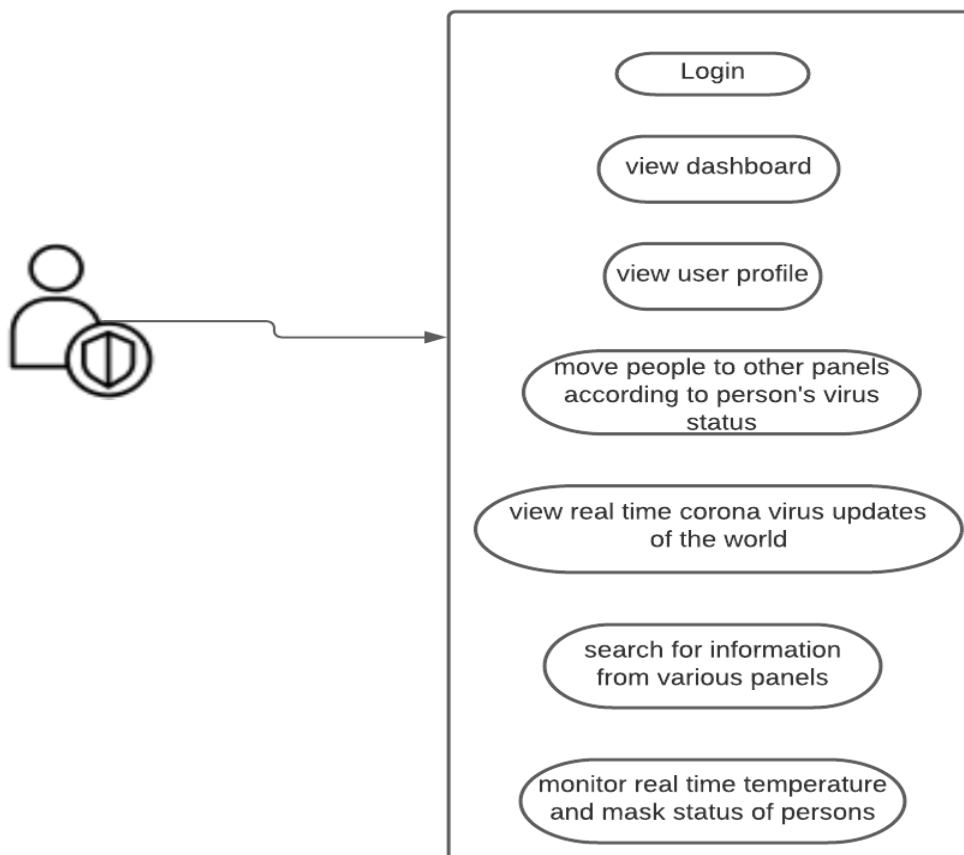


Figure 3.3-8: Application use case diagram

From the use case diagram above, the user can perform the following activities with the application;

- i. Sign in as an administrator to the desktop application to start the system.
- ii. View dashboard which shows various panels of the application
- iii. View user profile
- iv. Change person's status from suspected to quarantined if temperature is very high
- v. Search for information from the database. Data like temperature, mask status, time of arrival and picture of a person from the database.
- vi. View real time corona virus updates of the world.

3.3.4 Activity Diagram

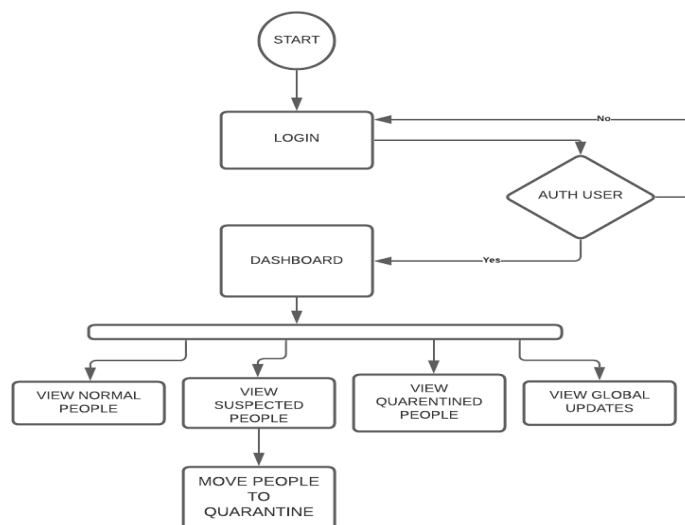


Figure 3.3-9: Activity Diagram

At first run, a default admin would be created and would be able to add other users. When the

application is started, the admin is required to enter his credentials to access the system. The application authenticates the admin's credentials from the SQLite database. If authentication is not successful, the application denies the user access to the system and redirects him back to the login page. If the authentication is successful, the dashboard of the application is displayed. On the dashboard page, the admin can view his profile, add other users to the system, remove users and also update his credentials. Since this application is meant to be used by industries and in homes, it is not meant to be used by the general public. This means that only administrators can add users to the system. Also the user can view panel information such as the normal people, suspected people and the quarantined people based on their temperature measurement. The user can search for information by time, temperature, mask status and the picture of the persons who use the facility. In addition, users can view and monitor the real time global updates of the coronavirus.

3.3.5 Database Design

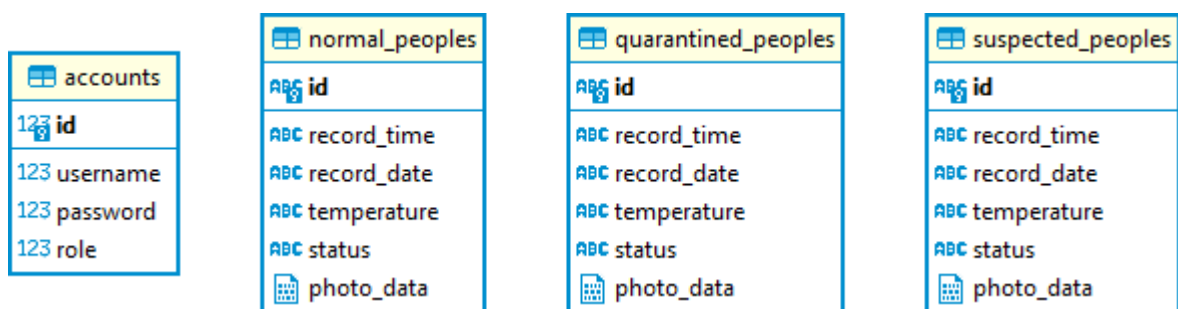


Figure 3.3-10: Database Design

A SQLite database was chosen for this project since it is fast and perfect for real time applications like our system.

3.4 System modelling

3.4.1 Schematic diagram

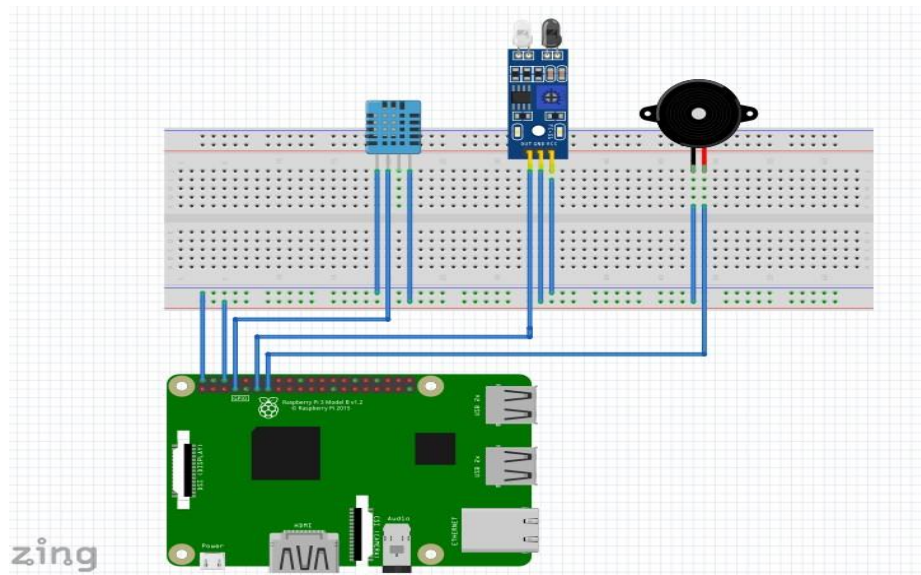


Figure 3.4-1: Schematic diagram of the hardware system

The diagram above was modelled using the fritzing application. From the diagram, a DHT11 temperature sensor, an Infrared(IR) sensor and a Piezo buzzer are connected to the Raspberry Pi 3b through the GPIO ports using jumper wires. The R a s p b e r r y Pi is connected to a 5V power source to enable it performs its functions.

3.5 Development tools and material requirements

3.5.1 Material Requirements

- i. Raspberry Pi 3b



Figure 3.5-1: Raspberry Pi 3b

The Raspberry Pi is a minimal expense little PC that associates with a PC screen or TV and works with a customary keyboard and mouse. It is a helpful little contraption that spotlights on showing individuals of any age prearranging dialects like Scratch and Python. It can play out every one of the elements of a PC, for example, web surfing and survey more noteworthy definition clasp, worksheets, and messing around. It has been utilized in a few computerized gadgets, including tweeting perching spaces, music machines, and finders, just as climate stations and infrared cameras since it is equipped for communicating with the external climate. Profoundly and a video center mixed media co-processor and the GPU, which incorporates double center sight and sound co-processor, including a Bluetooth 4.1 (Bluetooth and Bluetooth Classic). With Bluetooth Low Energy (BLE) and BCM43143 Wi-Fi, the Raspberry Pi 3 offers an up-grade towards another primary processor and improved systems administration. Moreover, the force the board of Raspberry 3 has been improved, with a redesigned power supply with 3.5 Amps that can deal with all the more remarkable outside USB gadgets. The inherent USB ports of Raspberry Pi 3 give adequate network to interface the mouse or whatever else to the Raspberry Pi. Most Raspberry Pi framework chips can be overclocked to 800 MHz, and some can be overclocked to 1000 MHz. It is accounted for that the Raspberry Pi 2 can be comparatively overclocked, in any event, arriving at 1500 MHz in outrageous cases (without all security highlights and overvoltage limitations). On Linux disseminations, you can utilize the program order to run "sudo raspi-config" to perform boot overclocking

without breaking the guarantee. In specific examples, the Pi will consequently deactivate overclocking when the chip temperature arrives at 85°C to drop the robotized settings on overclock and overclocking (that will drop guarantee). A cooler can be utilized to forestall overheating of Raspberry pi.

3.5.2 IR Sensor

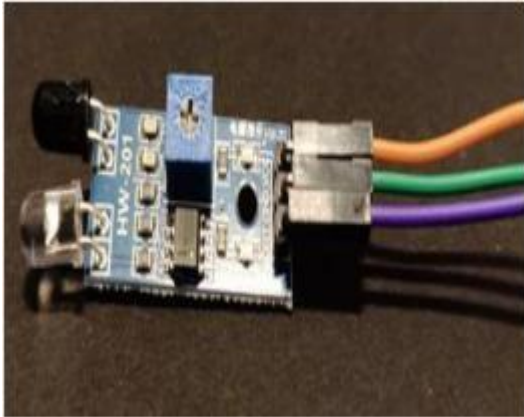


Figure 3.5-2 IR Sensor

Infrared sensors are utilized to count and screen the quantity of individuals who go into and leave the room. The IR sensor's working voltage is 5VDC, and the I/O pins are 5V and 3.3V viable. It accompanies an assortment of alternatives. Fig 3 depicts an IR Sensor that includes a constructed encompassing light sensor and a mounting opening, just as a flexible detecting scope of up to 20cm.

3.5.3 DHT11 SENSOR

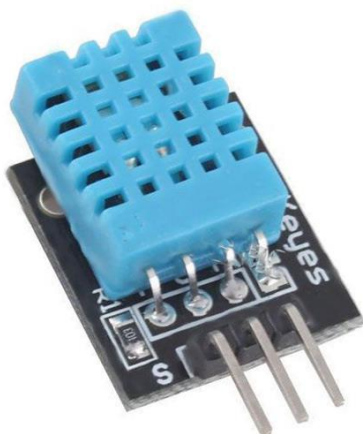


Figure 3.5-3 DHT11 SENSOR:

The DHT11 is a basic, ultra low-cost digital temperature and humidity sensor. It uses a capacitive humidity sensor and a thermistor to measure the surrounding air, and spits out a digital signal on the data pin (no analog input pins needed). Its fairly simple to use, but requires careful timing to grab data.

3.5.4 Other Components Used

a. Servo Motor



Figure 3.5-4a Servo Motor

A servo motor is used to demonstrate the opening and closing of the main door. shows a diagram of a Servo Motor, that produces velocity and torque based on the voltage and the amount of current supplied. It also works as a part of a closed-loop system providing velocity and torque as commanded from the servo controller with a feedback device to close the loop.

b. Jumper Wires



Figure 3.5-4b Jumper Wires

The jumper wires are used to connect the DHT11 temperature sensor, the IR sensor and the buzzer to the GPIO pins of the raspberry pi

c. Piezo Buzzer

A piezo buzzer is a type of electronic device that's used to produce a tone, alarm or sound. It's lightweight with a simple construction, and it's typically a low-cost product. Yet at the same time, depending on the piezo ceramic buzzer specifications, it's also reliable and can be constructed in a wide range of sizes that work across varying frequencies to produce different sound outputs.



Figure 3.5-4 :Piezo Buzzer

3.5.5 Development tools

Thonny IDE

The Thonny IDE is used to develop the code which is used on the Raspberry Pi microprocessor to control the processes of the temperature sensor, the IR sensor and the buzzer modules. This code is written in python and runs directly on the microprocessor.

PyCharm IDE

The desktop application was developed using Visual Studio Code in the Python programming language. The front end of the desktop application was developed using the PyQt5 framework. The backend was developed using SQLite. The Ninja Coronavirus API is used to provide the real time covid data across the world.

Postman Software

The Postman Software is used to test API endpoints to see if they are working. It was used to test the Ninja Coronavirus API.

Chapter 4 – Implementation and testing

4.0 Introduction

This section shows how our system was developed, depicting how our subsystems were implemented and tested for their various functionalities.

4.1 System implementation process

4.1.1 The general system implementation process

- i. The camera, together with the hardware module is placed at the entrance of the facility.
- ii. The admin logs in and starts the desktop application.
- iii. The camera starts to capture video frames and detects if there is a person in the frame.
- iv. If a person is detected a photo of the person is captured and processed to see if he/she is wearing a mask or not.
- v. If the person has on a mask measure the temperature of the person by prompting the person to take his hand close to the temperature sensor.
- vi. The temperature of the person is then measured and sent to the database through python sockets.
- vii. Person is allowed access to the building if temperature is within the healthy range of not more than 37 degrees Celsius.
- viii. Display time and date of arrival, temperature and the status of the temperature.

4.1.2 Hardware subsystem implementation process

4.1.2.1 Then the various components were bought and connected, as shown in the system modelling section

4.1.2.2 The various components were then tested individually to check if they worked adequately using different python codes

4.1.2.3 Finally, the various python code for the hardware subsystem was written and run on the Raspberry Pi 3b microprocessor.

4.1.2.4 A 5V type B charger was used to power the microprocessor

4.1.3 Software subsystem implementation process

4.1.2.5 The software subsystem was developed using the PyCharm software in Python. It comprises of the desktop application and the database.

4.1.2.6 The front end of our application was developed using the PyQt5 framework, which makes the front end very rich and user friendly irrespective of the operating system running on that device.

4.1.2.7 Python sockets was used to receive temperature readings from the raspberry pi to the desktop application.

4.1.2.8 The Ninja coronavirus API was used to show the real time corona virus updates across the world.

4.2 Testing and results

4.2.1 Hardware Subsystem

4.2.1.1 Temperature Device up and Running

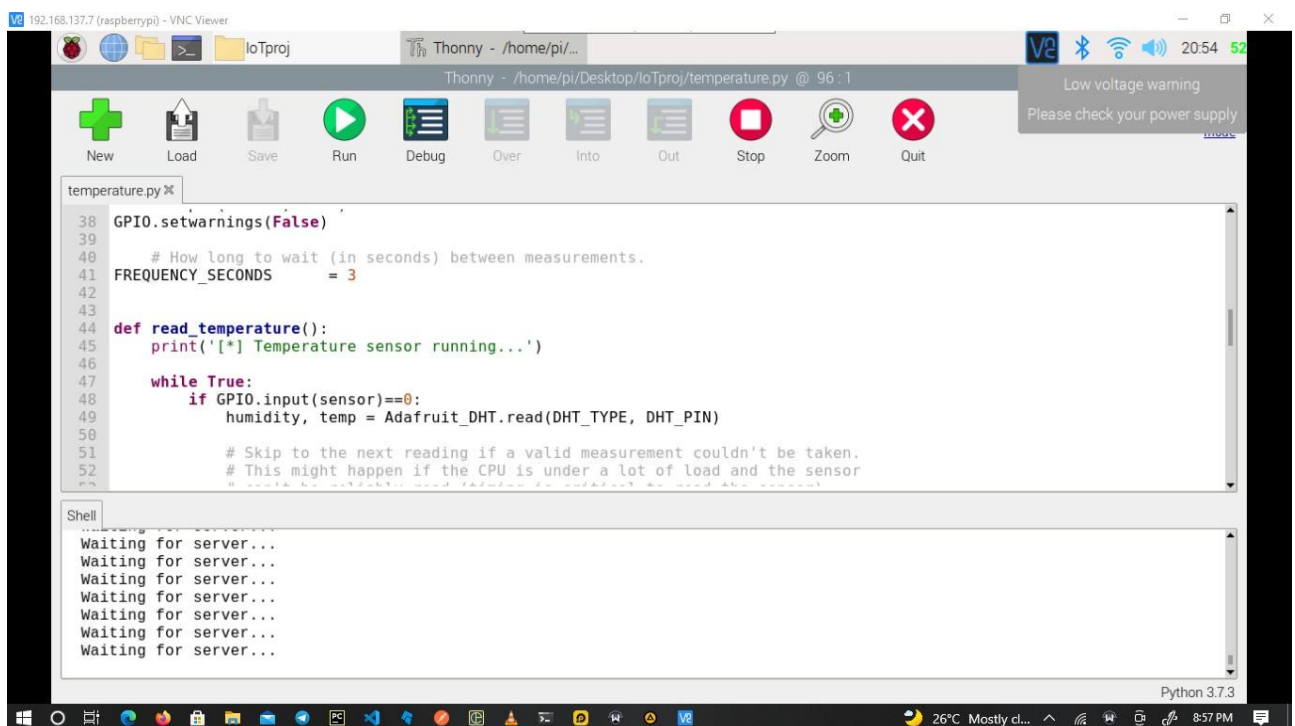


Figure 4-2-0-1: Waiting for desktop application to request temperature scan

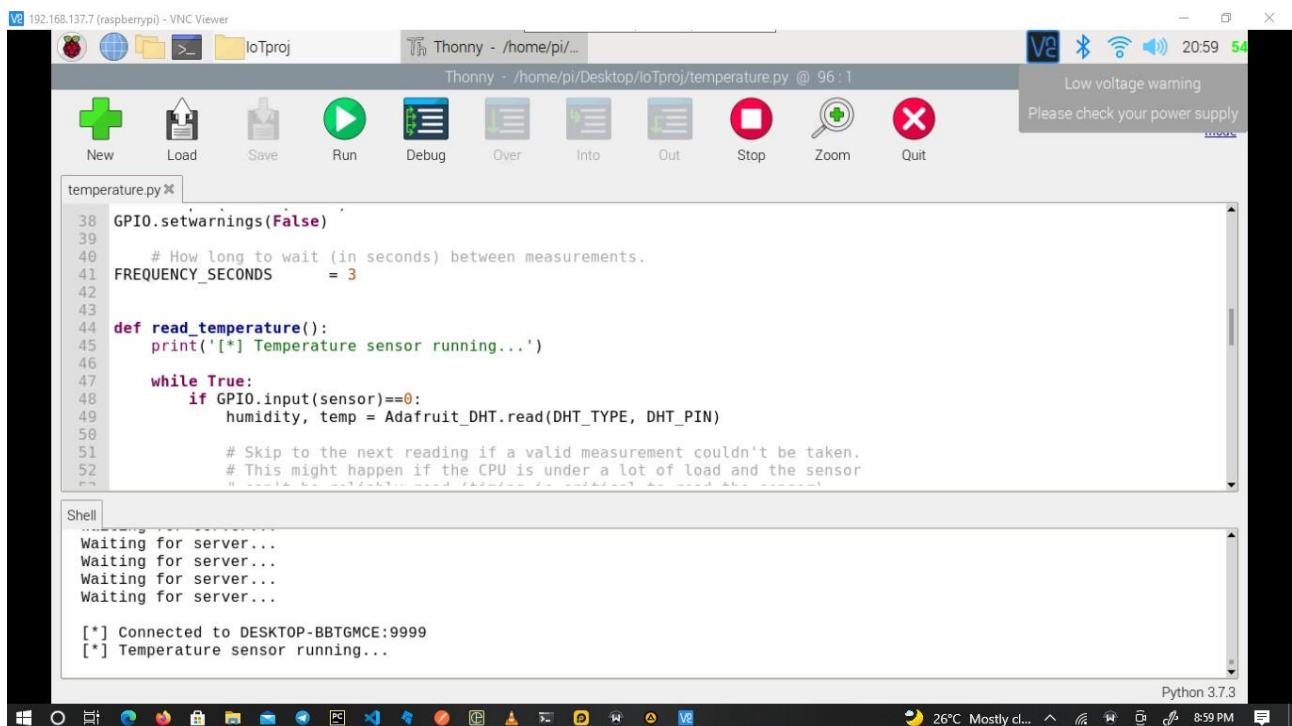


Figure 4-2-0-2: Temperature Device about to take a scan

Testing the Final Hardware Subsystem

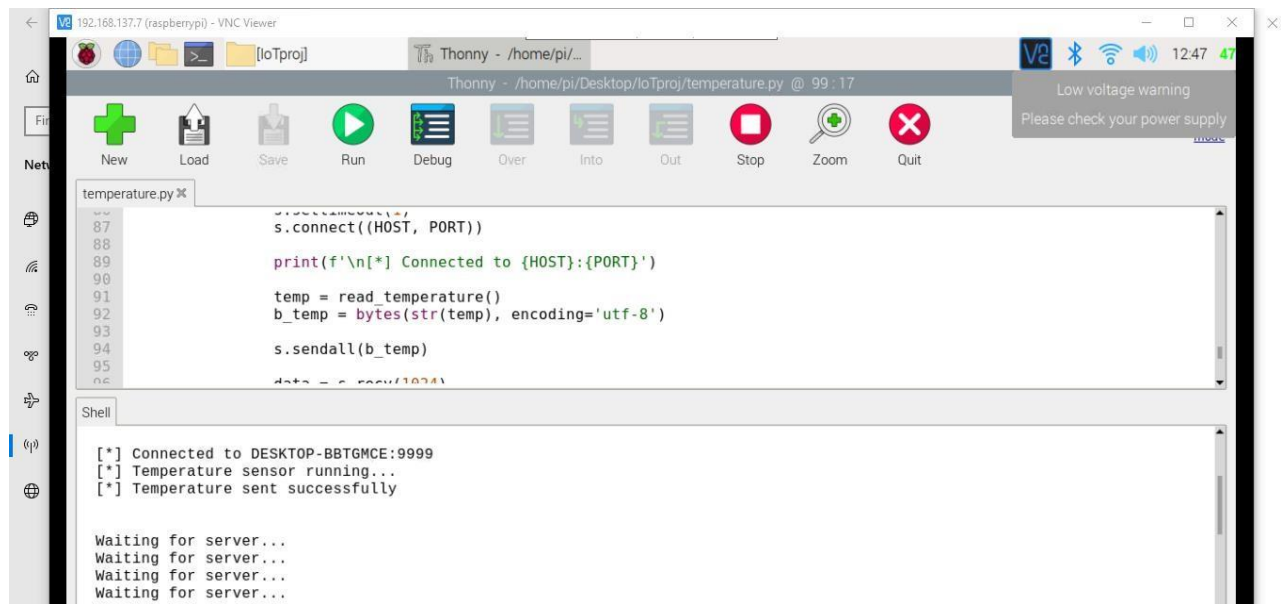


Figure 4-2-0-3: Temperature sent successfully to the desktop application

Postman APITesting

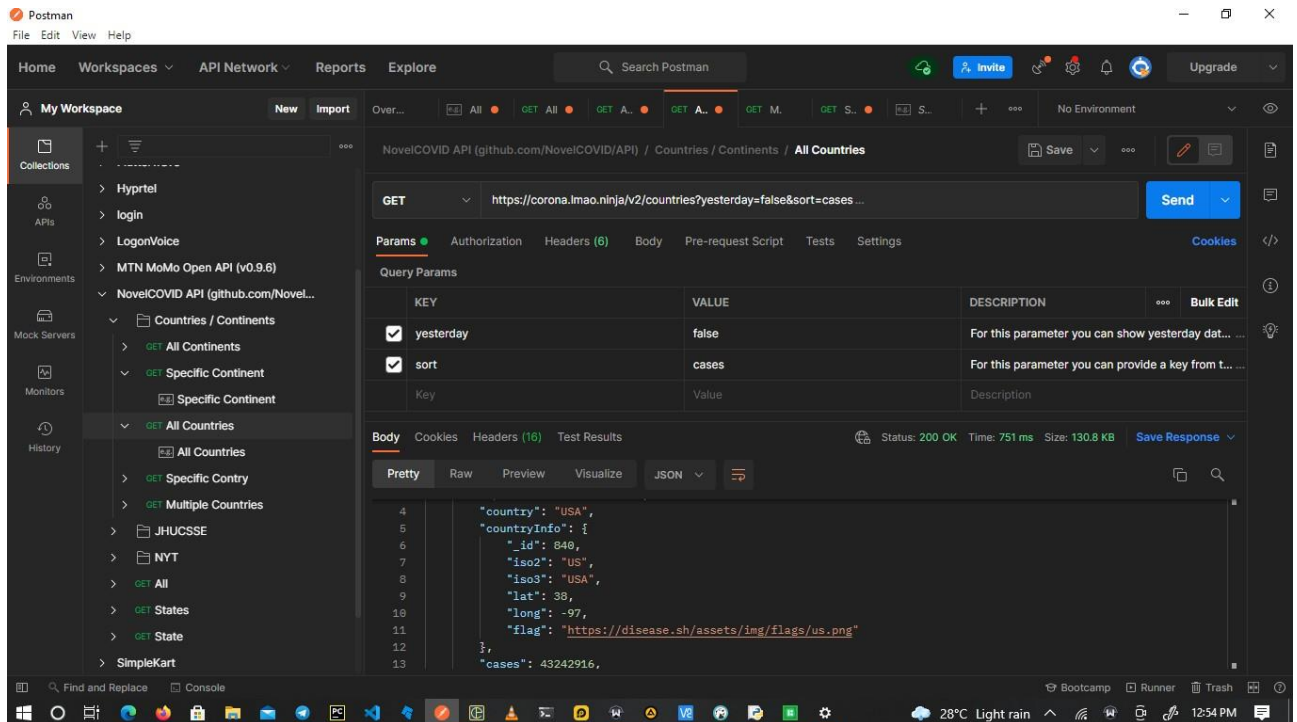


Figure 4-2-0-4: Testing of API endpoing using Postman

4.2.2 Software Subsystem

4.2.2.1 Testing Mask Detection Subsystem

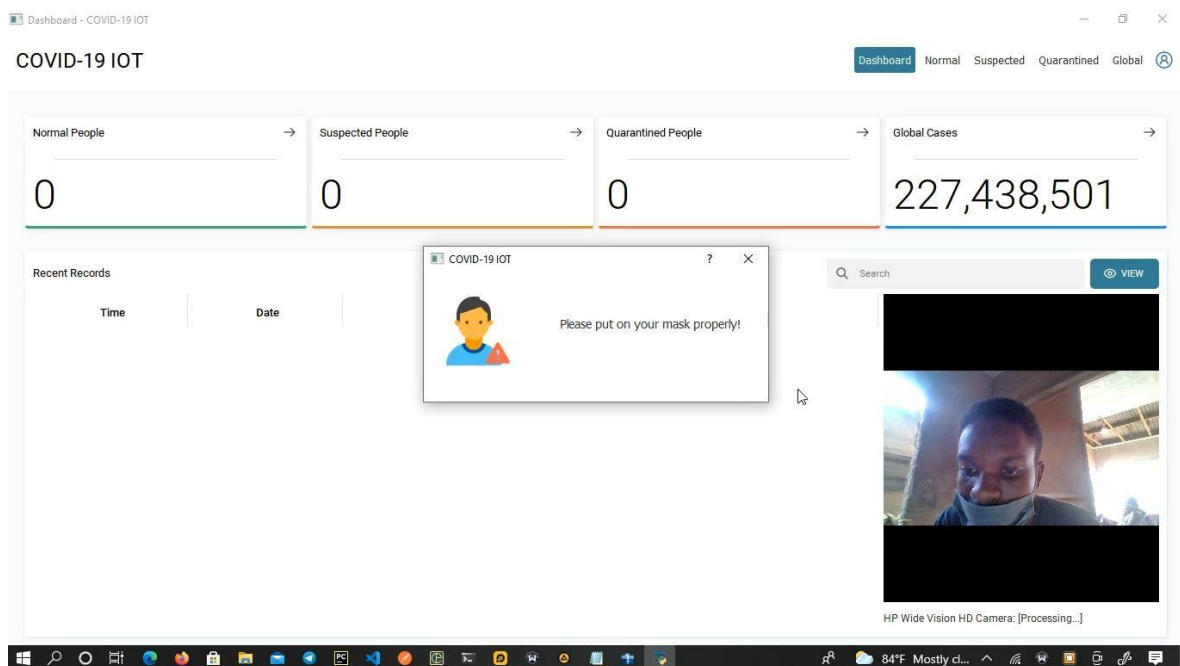


Figure 4-0-5: Result when mask is not worn properly

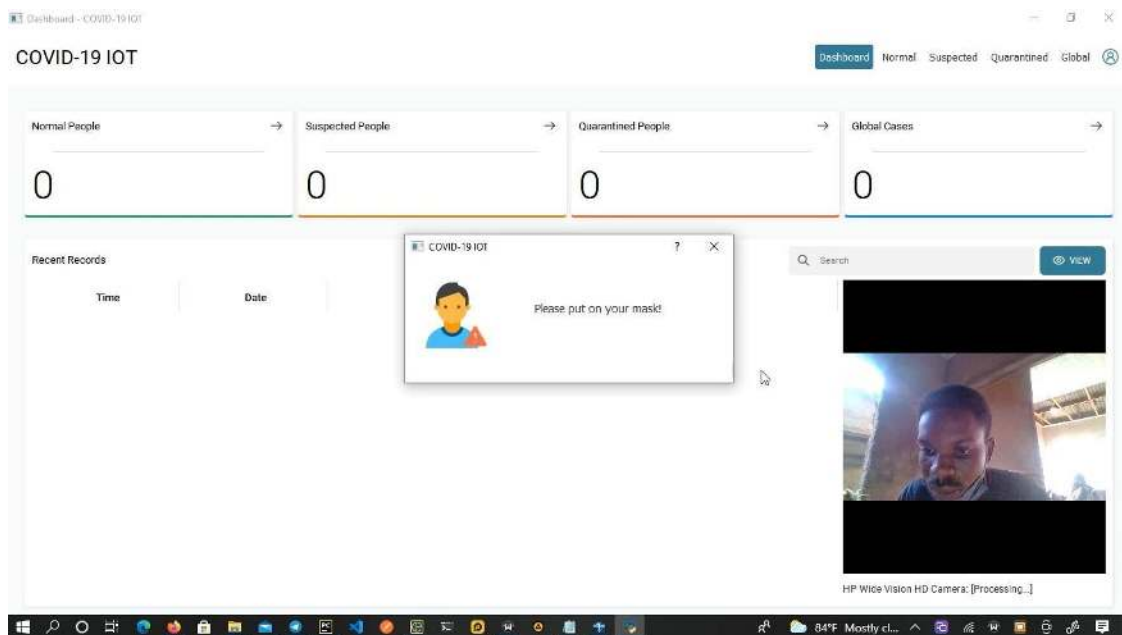


Figure 4-2-5: Results when there is no mask on

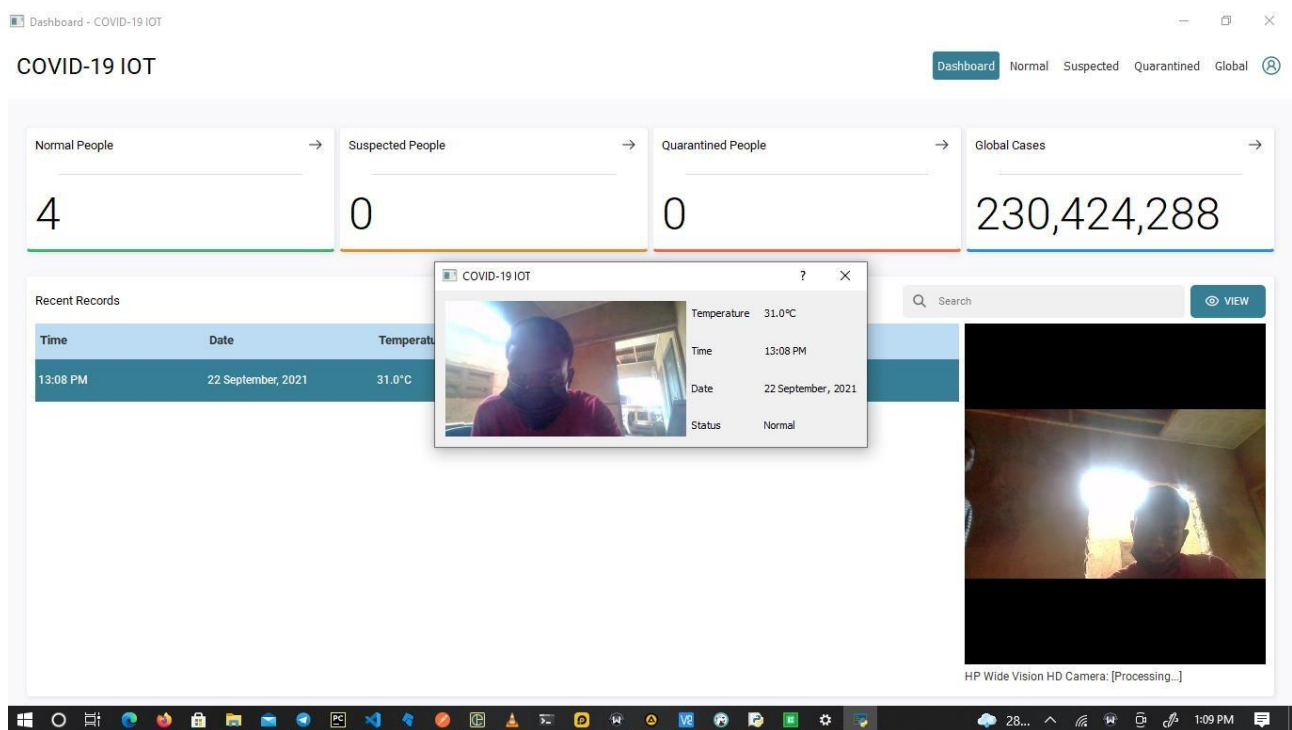


Figure 4-2-6: Result when mask is on

Normal People - COVID-19 IOT

COVID-19 IOT

Dashboard Normal Suspected Quarantined Global

5

Search

VIEW DELETE

Time	Date	Temperature	Status
12:41 PM	22 September, 2021	30.0°C	Normal
12:41 PM	22 September, 2021	32.0°C	Normal
13:08 PM	22 September, 2021	31.0°C	Normal
13:11 PM	22 September, 2021	31.0°C	Normal
13:11 PM	22 September, 2021	31.0°C	Normal

Figure 4-2-7: Table showing normal people with their temperature recordings

Global Cases - COVID-19 IOT

COVID-19 IOT

Dashboard Normal Suspected Quarantined Global

REFRESH HIDE GLANCE

YESTERDAY

Total Cases	Deaths	Recovered	Critical Cases
230,434,395	4,724,960	207,179,638	98,325

Coronavirus

Pos	Country	Total Cases	New Cases	Active Cases	Critical Cases	Total Deaths	New Deaths	Total Recovered	New Recovered	Tests
1	USA	43,246,791	+4,489	9,719,817	23,834	696,918	+51	32,830,056	+31	625,058,480
2	India	33,531,498	+1,421	301,956	8,944	445,801	-	32,783,741	+7,534	556,754,282
3	Brazil	21,247,094	-	405,378	8,318	591,518	-	20,250,198	-	57,282,520
4	UK	7,496,543	-	1,317,531	982	135,455	-	6,043,557	-	293,917,586
5	Russia	7,333,557	+19,706	590,719	2,300	200,625	+817	6,542,213	+16,102	187,700,000
6	France	6,964,699	-	165,459	1,744	116,251	-	6,682,989	+15,758	138,572,353
7	Turkey	6,904,285	-	453,840	633	62,065	-	6,388,380	-	83,140,095

Figure 4-2-8: Global coronavirus update showing the current update

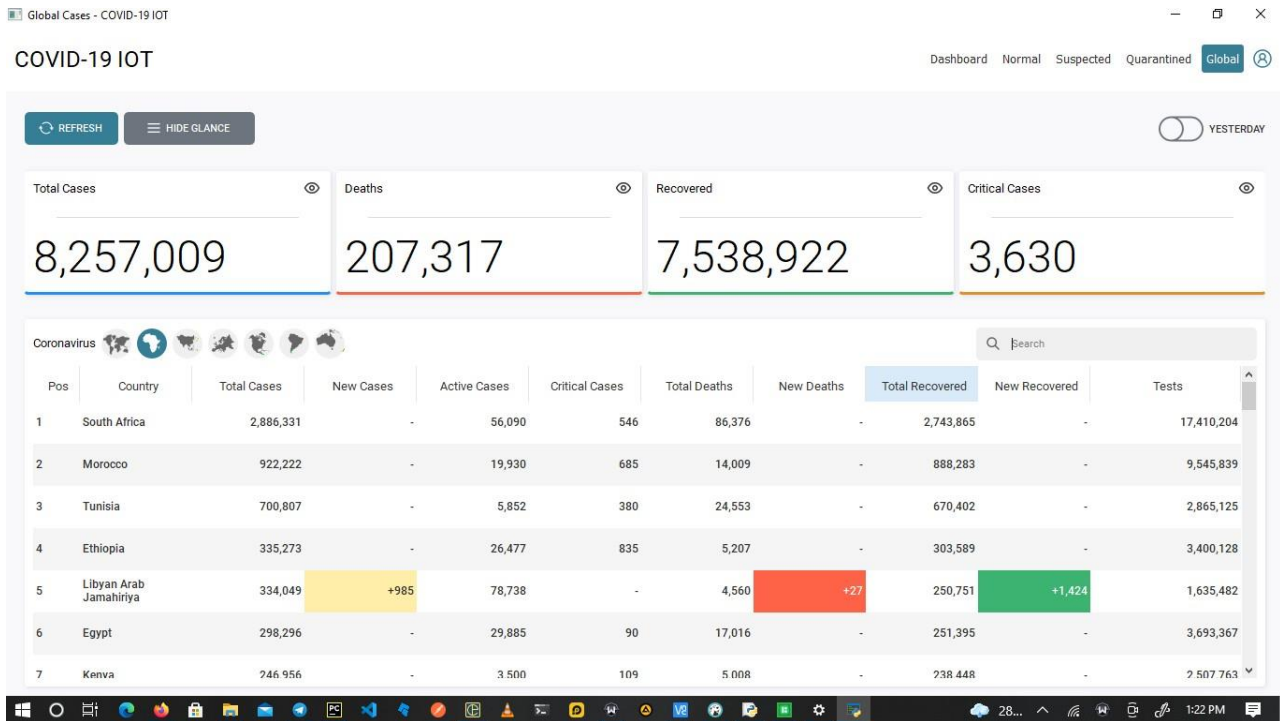


Figure 4-2-9 Real Time Covid updates from Africa

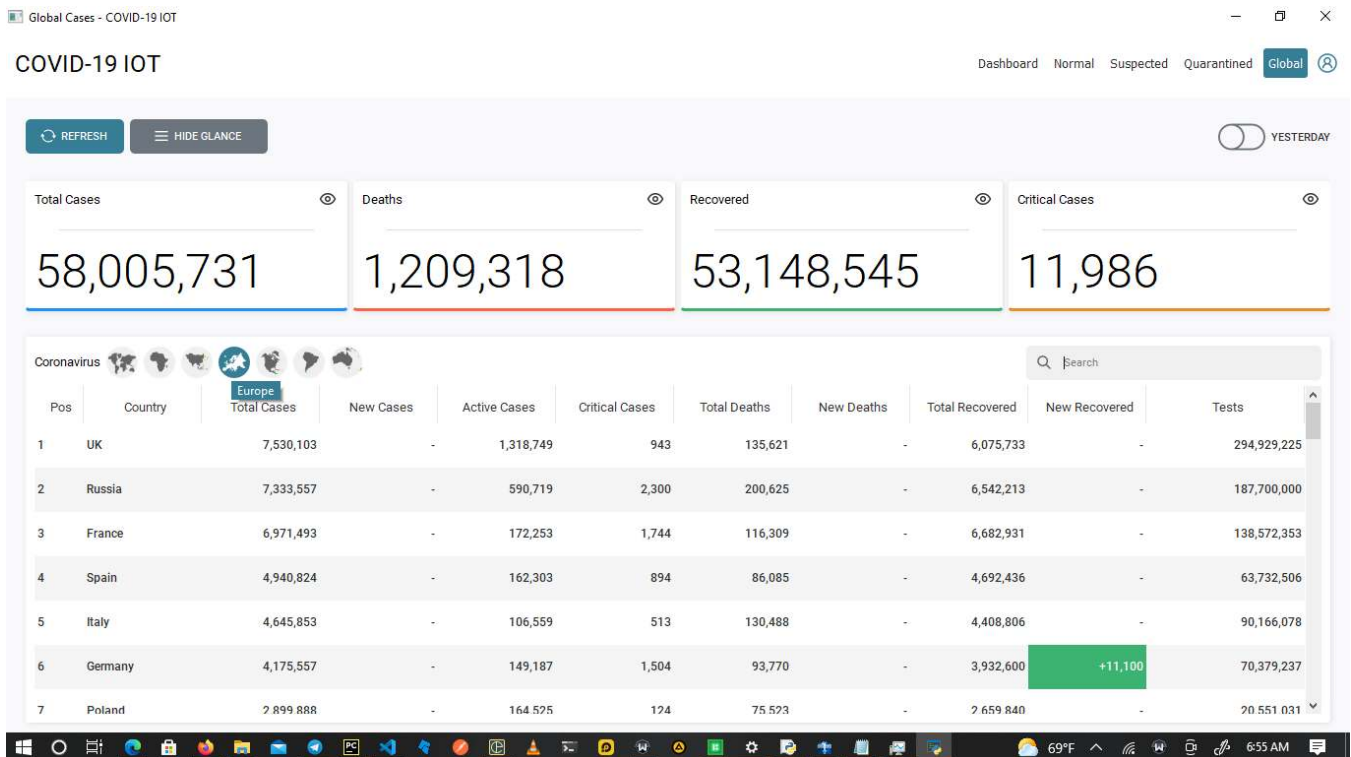


Figure 4-4-10 Real Time Covid updates from Europe

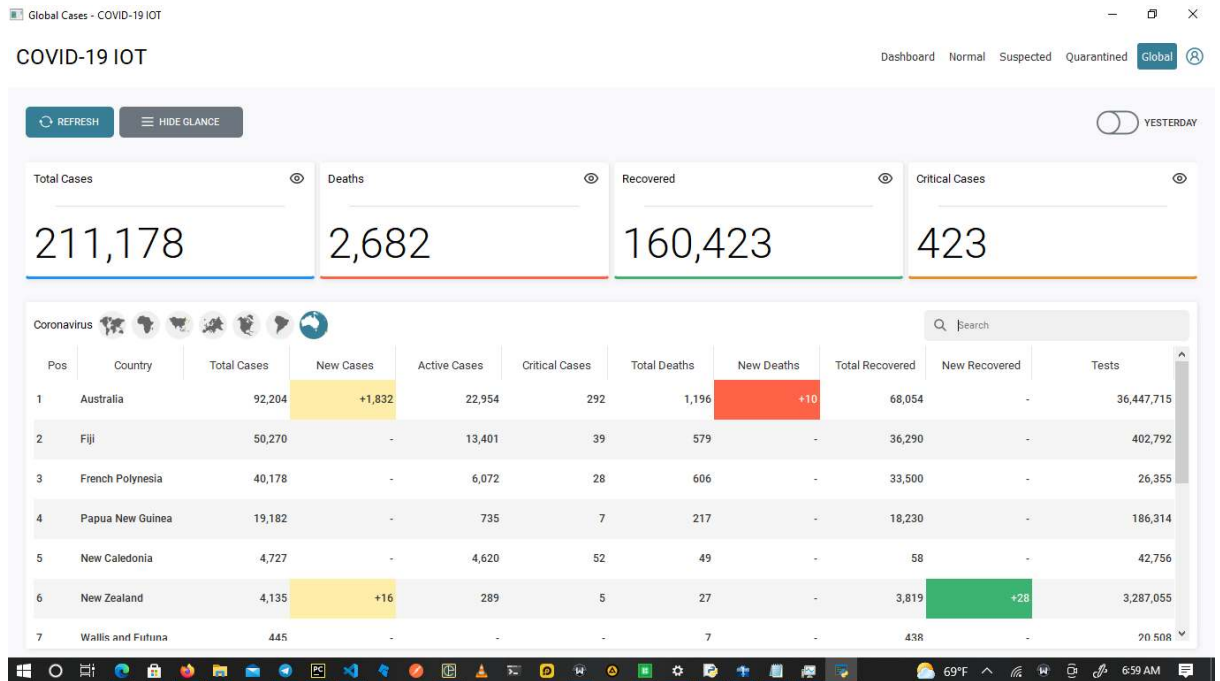


Figure 4-2-11 Real Time Covid Updates from Oceania

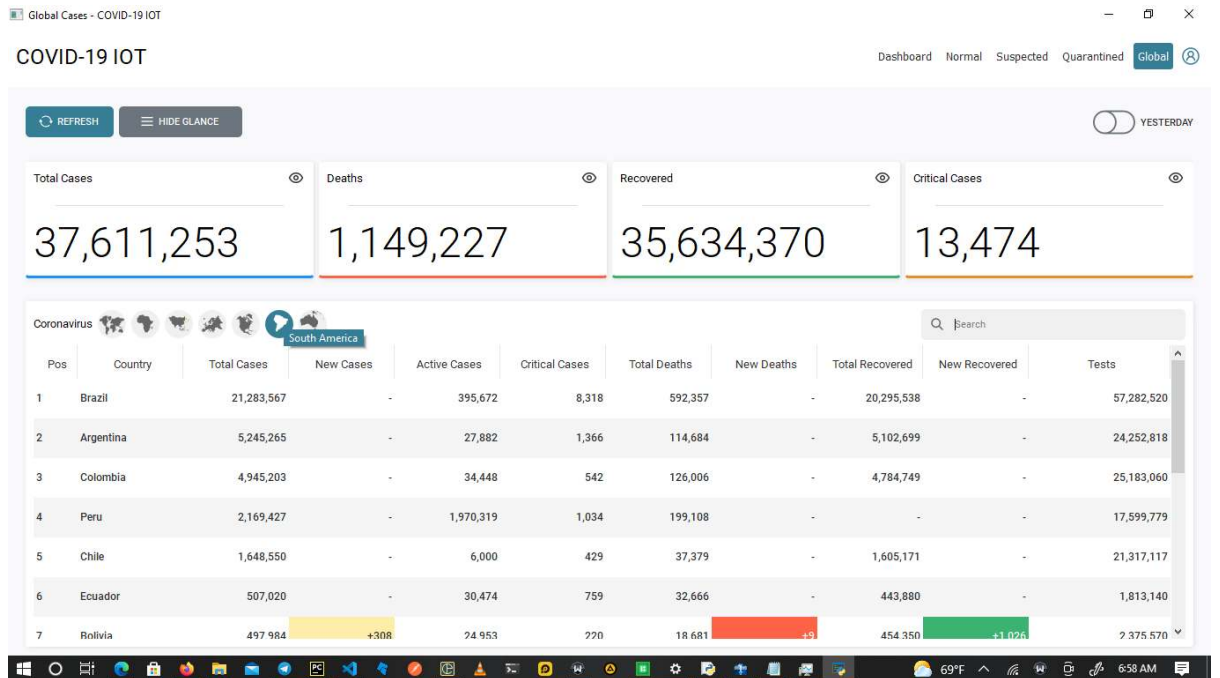


Figure 4-2-12 Real Time Covid Updates from South America

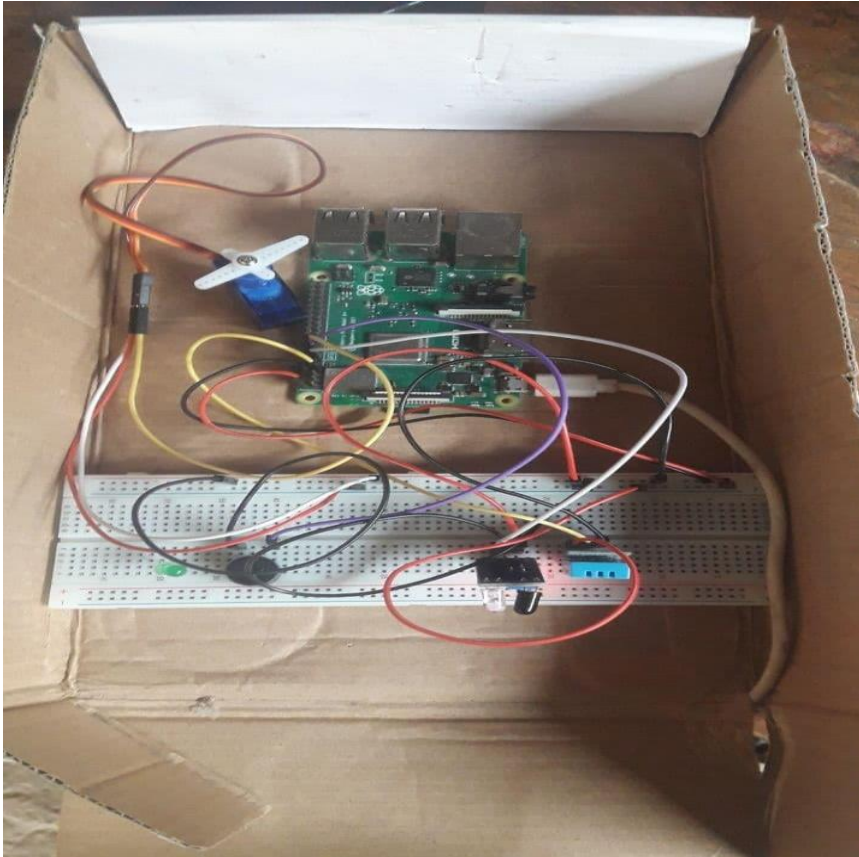


Figure 4-2-13 Hardware Setup

4.3 Discussion of results and analysis

Figure 4.1 shows how the connection between the temperature measurement module and the server was tested to see if it works. Here, python sockets were used to establish a connection between the temperature measurement module and the server. A connection was established only when the desktop application sent a request to the server for the temperature of the person to be measured. Figure 4.2 shows the results of a temperature scan being requested by system. Figure 4.3 shows the results obtained when the temperature reading was successfully recorded and sent to the desktop application server. Figure 4.4 shows how Postman software was used to test the API endpoints. Figures 4.5 to 4.7 shows the results of the face mask detection system when a person is in front of the camera. Here, the software uses our trained face mask detection module to detect if faces in the live camera frame have on a mask or not, or do not have on their mask properly and sends the appropriate response to the visitor. The temperature of a person is taken if and only if he has on a mask. Figures 4.8- 4.9 shows the details of a person who has been successfully screened by the system and how the system categorizes people into the normal, suspected and quarantined category.

Figures 4.10 -4.11 shows the results obtained when the admin selects the global button in order to see the real time global statistics of the coronavirus. Figure 4.12 is a picture of the hardware setup of the overall system.

4.4 Performance evaluation and limitations of the system

4.4.1 Performance Evaluation

The table below shows how our system operates when compared to other existing systems.

Table 2:Performance Evaluation of Our System against Existing Systems

System	Detect faces with mask	Detect faces without mask	Detect faces with improper mask	Take temperature measurement	Sound alarm upon high temperature detection	View real time information on an application
Our System	YES	YES	YES	YES	YES	YES
Existing system[2]	YES	YES	NO	YES	YES	NO
Existing system [3]	YES	YES	NO	NO	NO	YES
Existing system[4]	NO	NO	NO	YES	YES	YES
Existing system [5]	YES	YES	NO	NO	NO	YES

Existing system [6]	YES	YES	YES	NO	NO	YES
Existing system [7]	YES	YES	NO	YES	YES	YES

The table below shows how the hardware subsystem performed when various modules were tested

Table 3: *Performance Metrics of Hardware Subsystem*

Hardware Subsystem	Testing	Expected Results	Observation	Performance Percentage
IR SENSOR	The IR sensor was used to detect the presence of a hand.	Hand placed between 0 to 6cm away from the sensor should be detected	Testing out of 10 times, the module worked 10 times.	In percentage, it worked 100% of the time.
TEMPERATURE MEASUREMENT	The DHT11 sensor was used to measure the temperature of a person at the	The DHT11 temperature sensor should be able to	Testing out of 10 times, the module worked properly 8 times.	In percentage, it worked 80% of the time

	door.	detect temperature ranges between 0 to 50 degree Celsius.		
ALERT SYSTEM	The piezo buzzer was used to sound an alarm when temperature was above the required threshold	An alarm should be sounded anytime a temperature above 37 degrees Celsius is measured	Testing out of ten times, the system worked perfectly at all times	Percentage wise, the module worked 100% of the time
Final Hardware System	The overall hardware system was implemented using a Raspberry pi microprocessor interfaced with the various subsystems	Respond to temperature reading requests from the desktop application and send readings to the application in real time	Out of ten times, our system worked 8 times	In percentage, system worked 80% of the time

The table below shows how the software subsystem performed when various modules were tested

Table 4:Performance Metrics of Software system

Software Subsystem	Testing	Expected Results	Observation	Performance Percentage
Face Mask detection	The face mask detection subsystem was tested using a web camera to take images of people at the entrance and determining if they have on a mask	The system should correctly be able to determine if a person has on a mask or not, or has it on improperly	The system worked correctly 9 out of 10 times	Percentage wise, the subsystem worked 90% of the time
Data consumption	The system was tested on how fast it consumes data	The system is to consume less data since it only requires data to load API's to the dashboard	Data consumption was low at all times of testing the system	It worked 100% of the time

Response time	The system was tested to find how fast it responded to real time changes	The system should give real time changes to the user	Out of 10 tests, the response time for the system was appreciably good due to the fastness of the PyQt5 framework	System worked 85% of the time
---------------	--	--	---	-------------------------------

4.4.2 Limitations of the system

The limitations to this system however is that it does not work well in dark areas and it requires active internet connection for operation.

Chapter 5 – Conclusion and Recommendations

5.0 Introduction

The coronavirus disease has turned into a pandemic and it is presently spreading quickly through direct and indirect contacts among individuals. Manual systems of ensuring Covid 19 protocols are observed which are being used in our homes and public places might turn into a wellspring of the spread of infection of Covid 19. Presently this infection will remain in our lives, and we need to live with it, however need to take safety measures stringently to break the chain of this infection. The rationale of our work comes from individuals defying the principles that are obligatory to stop the spread of Covid. Our system focuses on face mask detection architecture, temperature monitoring architecture and an app for contact tracing.

5.1 Conclusions

In our work, an IoT enabled smart door is built up to recognize facemasks and to check body temperature that can upgrade public security. Also our work has a web app that is used for contact tracing and also provides update of global statistics of the Covid 19. This will assist with decreasing labor while likewise giving an additional layer of protection against the spread of Covid 19 disease. This model uses desktop application to detect face mask and raspberry pi to monitor body temperature.

5.2 Recommendations

We recommend that our future expansion will include social distancing between individuals. we plan on achieving that by using a pre trained deep learning algorithms. Also we will focus on implementing an automatic hand sanitizer Dispenser as regularly sanitizing of hands is one of the main guidelines prescribed by WHO. we plan to achieve this using an Arduino, ultrasonic sensor, water pump and hand sanitizer

5.3 Observations

With this project, individuals will be able to observe the covid 19 protocols by wearing their nose mask properly and also having their body temperature checked. Also the web

app admin should always be connected to the internet so as to check the status of any individual that passes through our door.

6.0 References

- [1] . World Health Organization. Modes of Transmission of Virus Causing COVID-19: Implications for IPC Precaution Recommendations: Scientific Brief, 27 March 2020; Technical Report; World Health Organization: Geneva, Switzerland, 2020.
- [2] P.S. Othman, R.R. Ihsan, R.B. Marqas, S.M. Almufti, "Image Processing Techniques for Identifying Impostor Documents Through Digital Forensic Examination". Image Process. Tech. 2020, 62, 1781–1794
- [3] S. M. Almofti, R. Marqas and Z. A. Nayef, "Real Time Face-mask Detection with Arduino to Prevent COVID-19 Spreading," 2021.
- [4] P. F. Jaeger, S. A. Kohl, S. Bickelhaupt, F. Isensee, T. A. Kuder, H.-P. Schlemmer, and K. H. Maier- Hein, "Retina U-Net: Embarrassingly simple exploitation of segmentation supervision for medical object detection," Machine Learning for Health Workshop, pp. 171-183, 2020.
- [5] T.-Y. Lin, P. Dollár, R. Girshick, K. He, B. Hariharan, and S. Belongie, "Feature pyramid networks for object detection," Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 2117- 2125, 2017.
- [6] T.-Y. Lin, P. Goyal, R. Girshick, K. He, and P. Dollár, "Focal loss for dense object detection," Proceedings of the IEEE international conference on computer vision, pp. 2980-2988, 2017.
- [7] W. Liu, D. Anguelov, D. Erhan, C. Szegedy, S. Reed, C.-Y. Fu, and A. C. Berg, "Ssd: Single shot multibox detector," European conference on computer vision, pp. 21-37, 2016.
- [8] D. T. Nguyen, H. G. Hong, K. W. Kim, and K. R. Park, "Person recognition system based on a combination of body images from visible light and thermal cameras," Sensors, vol. 17, no. 3, pp. 605, 2017.
- [9] J. Redmon, S. Divvala, R. Girshick, and A. Farhadi, "You only look once: Unified, real-time object detection," Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 779-788, 2016.
- [10] J. Redmon and A. Farhadi, "YOLO9000: better, faster, stronger," Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 7263-7271, 2017.
- [11] J. Redmon and A. Farhadi, "Yolov3: An incremental improvement," arXiv preprint

arXiv:1804.02767, 2018.

[12] S. Ren, K. He, R. Girshick, and J. Sun, "Faster r-cnn: Towards real time object detection with region proposal networks,P. Magrath, R. Jain, A. Madan, R. Arora, P. Kataria and J. Hemanth, "SSDMNV2: A real time DNN-based face mask detection system using single shot multibox detector and MobileNetV2," *Sustainable cities and society*, March 2021.

[Online].Available:<https://www.ncbi.nlm.nih.gov/pmc/articles/PMC7775036/#sec0085>.

[13] U. Takrim, F. Sheikh, N. Sheikh and M. B. S. Hazra, "Temperature abd Mask Scanning System," *nternational Journal of Advanced Research in Computer and Communication Engineering*, vol. 10, no. 6, 2021. J. L. Q. Y. a. Z. L. S. Ge, "Detecting Masked Faces in the Wild with LLE-CNNs," *IEEE Conference on Computer Vision and Pattern Recognition*, 2017. [Online]. Available: <https://ieeexplore.ieee.org/document/8099536>.

[14] M. Shinde, T. Sukhadare, S. Vaidya and P. M. Kalyankar, "Face Mask Detection Alert System using Raspberry Pi," *International Research Journal of Engineering and Technology*, vol. 08, no. 04, 2021.

[15] A. Hidayat *et al.*, "Designing IoT-Based Independent Pulse Oximetry Kit as an Early Detection Tool for Covid-19 Symptoms," *2020 3rd International Conference on Computer and Informatics Engineering (IC2IE)*, 2020, pp. 443-448, doi: 10.1109/IC2IE50715.2020.9274663.

[16]] S. V. Militante and N. V. Dionisio, "Deep Learning Implementation of Facemask and Physical Distancing Detection with Alarm Systems," *2020 Third International Conference on Vocational Education and Electrical Engineering (ICVEE)*, 2020, pp. 1-5, doi: 10.1109/ICVEE50212.2020.9243183.

[17] Loey M, Manogaran G, Taha MHN, Khalifa NEM. Fighting against COVID-19: A novel deep learning model based on YOLO-v2 with ResNet-50 for medical face mask detection. *Sustain. Cities Soc.* 2021;65:102600. doi: 10.1016/j.scs.2020.102600.

[18] N. Petrovic and D. Kocic, "IoT-based System for COVID-19 Indoor Safety Monitoring," in *IcETRAN 2020*, Belgrade, 2020.

[19] M. M. Rahman, M. M. H. Manik, M. M. Islam, S. Mahmud and J. -H. Kim, "An Automated System to Limit COVID-19 Using Facial Mask Detection in Smart City Network," *2020 IEEE International IOT, Electronics and Mechatronics Conference*

(*IEMTRONICS*), 2020, pp. 1-5, doi: 10.1109/IEMTRONICS51293.2020.9216386.

[20] S. S. Vedaiei *et al.*, "COVID-SAFE: An IoT-Based System for Automated Health Monitoring and Surveillance in Post-Pandemic Life," in *IEEE Access*, vol. 8, pp. 188538-188551, 2020, doi: 10.1109/ACCESS.2020.3030194

[21] B Varshini, HR Yogesh, Syed Danish Pasha, Maaz Suhail, V Madhumitha, Archana Sasi, IoT-Enabled Smart Doors for Monitoring Body Temperature and Face Mask Detection,

[22] W. Bu, J. Xiao, C. Zhou, M. Yang and C. Peng, "A cascade framework for masked face detection," , IEEE InternationalConference on Cybernetics and Intelligent Systems (CIS) and IEEE Conference on Robotics, Automation and Mechatronics (RAM), Ningbo, 2017.

[23] Gupta, P.; Agrawal, D.; Chhabra, J.; Dhir, P.K. IoT based smart healthcare kit. In Proceedings of the IEEE 2016 International Conference on Computational Techniques in Information and Communication Technologies (ICCTICT), New Delhi, India, 11–13 March 2016; pp. 237–242.

[24] Reddy, A.S.B.; Juliet, D.S. Transfer learning with ResNet-50 for malaria cell-image classification. In Proceedings of the IEEE 2019 International Conference on Communication and Signal Processing (ICCSP), Chennai, India, 4–6 April 2019; pp. 0945–0949.

[25] World Health Organization. Infection prevention and control of epidemic- and pandemic-prone acute respiratory infections in health care. Geneva : World Health Organisation; 2014 Available from:

https://apps.who.int/iris/bitstream/handle/10655/112656/9789241507134_eng.pdf?sequence=1


APPENDICES

APPENDIX A- INTERFACES FOR DESKTOP APPLICATION


- **Login Page**



- **Dashboard**

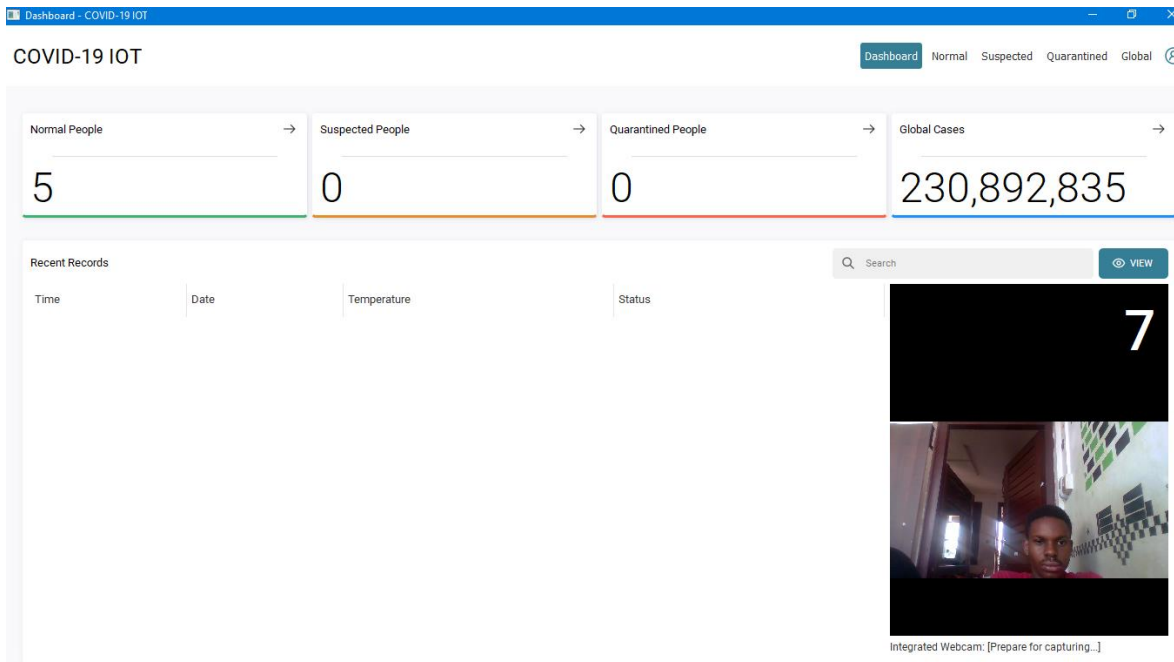

- **User Profile**

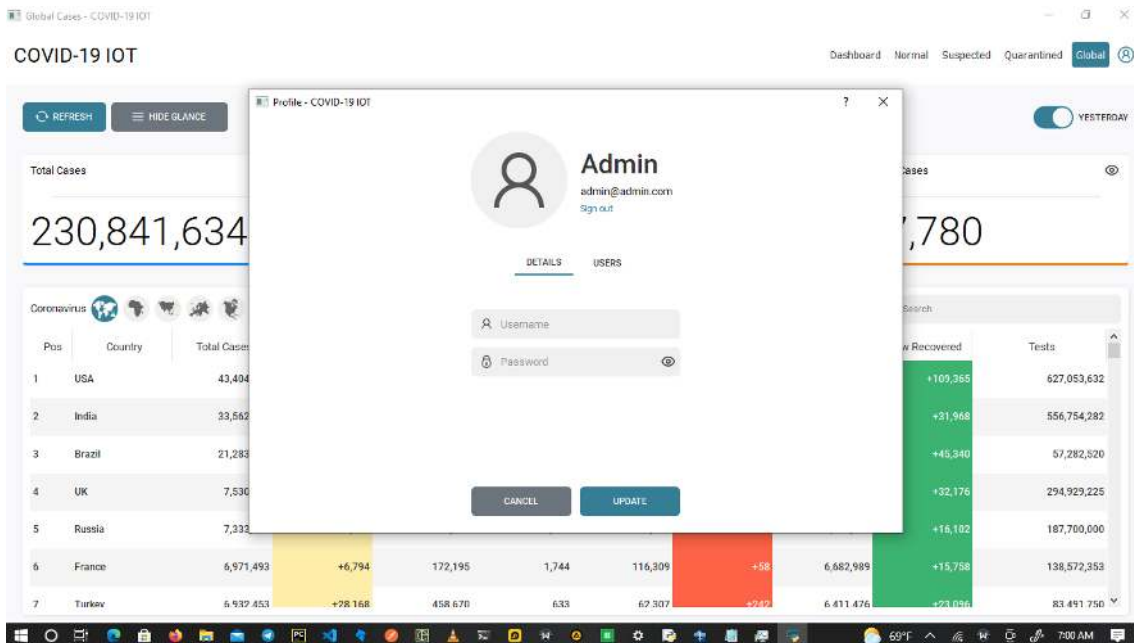

- **User's table**

Global Cases - COVID-19 IOT

COVID-19 IOT

Dashboard Normal Suspected Quarantined Global

Profile - COVID-19 IOT

< Users

EDIT SAVE DELETE

Username Password User

Username Password Role

230,841,634

Coronavirus

Pos	Country	Total Cases
1	USA	43,494
2	India	33,562
3	Brazil	21,283
4	UK	7,536
5	Russia	7,833
6	France	6,971,493
7	Turkey	6,932,453

69°F 7:00 AM

- **Normal people data**

Normal People - COVID-19 IOT

COVID-19 IOT

Dashboard Normal Suspected Quarantined Global

5


Search

VIEW DELETE

Time	Date	Temperature	Status
12:41 PM	22 September, 2021	30.0°C	Normal
12:41 PM	22 September, 2021	32.0°C	Normal
13:08 PM	22 September, 2021	31.0°C	Normal
13:11 PM	22 September, 2021	31.0°C	Normal
13:11 PM	22 September, 2021	31.0°C	Normal

28... 1:14 PM


• GLOBAL CORONA VIRUS UPDATE DASHBOARD

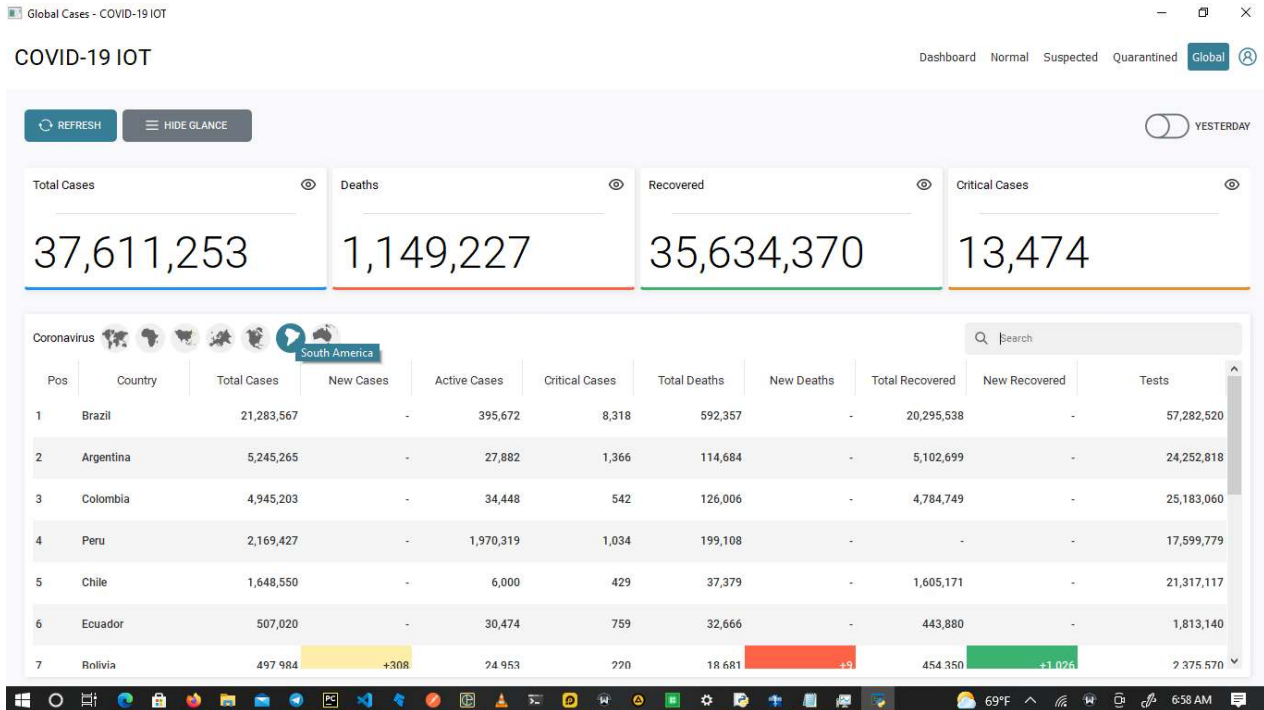

APPENDIX B – RASPBERRY PI CODE SNIPPETS FOR HARDWARE MODULE

```

1  #!/usr/bin/python
2
3
4
5  import sys
6  from time import sleep
7  import datetime
8  import RPi.GPIO as GPIO
9
10 import Adafruit_DHT
11 import gspread
12 from oauth2client.service_account import ServiceAccountCredentials
13 import socket
14
15
16 HOST = 'DESKTOP-BBTGMC6' # The server's hostname or IP address
17 PORT = 9999 # The port used by the server
18
19
20 # Type of sensor, can be Adafruit_DHT.DHT11, Adafruit_DHT.DHT22, or Adafruit_DHT.AM2302.
21
22 DHT_TYPE = Adafruit_DHT.DHT11
23
24 # Example of sensor connected to Raspberry Pi pin 23
25 DHT_PIN = 4
26 sensor=17
27 buzzer=27
28 servoPin=22
  
```

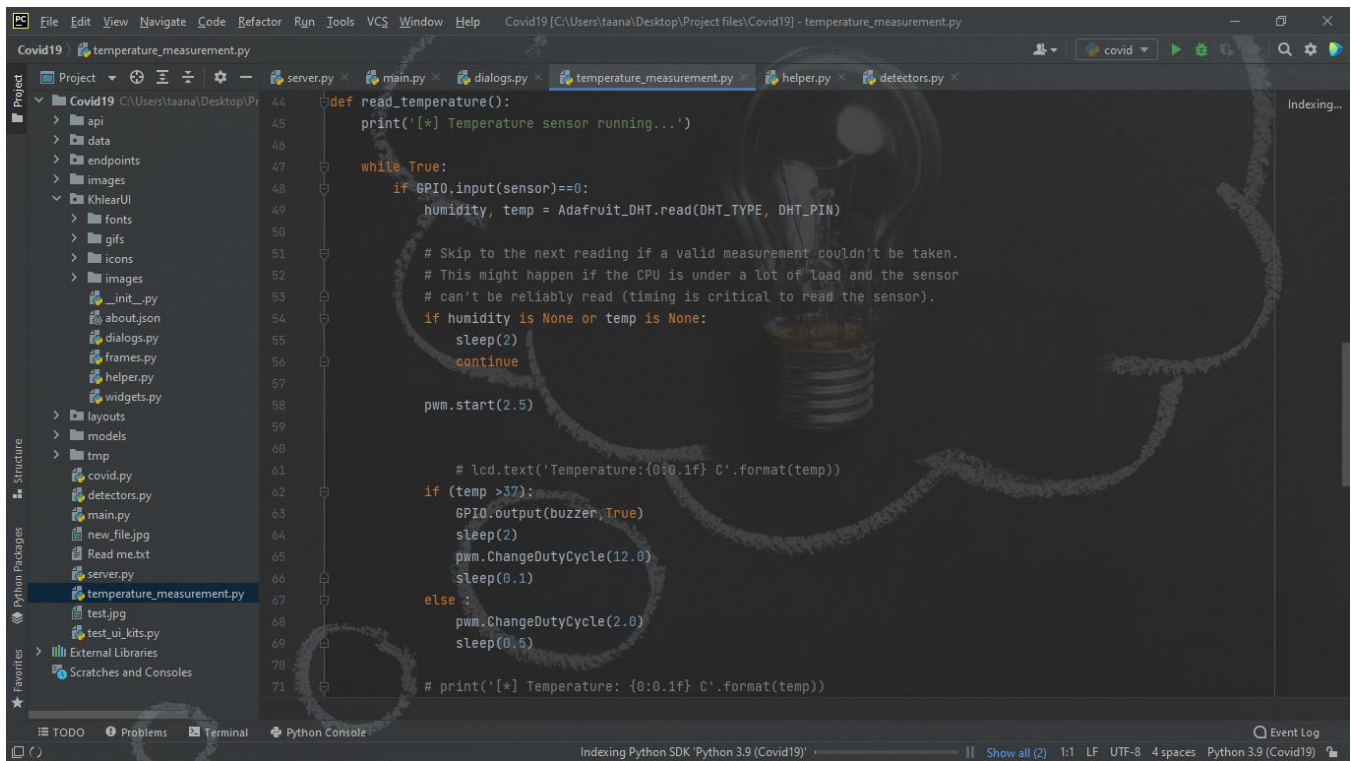

```
def read_temperature():
    print('[*] Temperature sensor running...')

    while True:
        if GPIO.input(sensor)==0:
            humidity, temp = Adafruit_DHT.read(DHT_TYPE, DHT_PIN)

            # Skip to the next reading if a valid measurement couldn't be taken.
            # This might happen if the CPU is under a lot of load and the sensor
            # can't be reliably read (timing is critical to read the sensor).
            if humidity is None or temp is None:
                sleep(2)
                continue


            pwm.start(2.5)

            # lcd.text('Temperature:{0:0.1f} C'.format(temp))

            if (temp >37):
                GPIO.output(buzzer,True)
                sleep(2)
                pwm.ChangeDutyCycle(12.0)
                sleep(0.1)
            else :
                pwm.ChangeDutyCycle(2.0)
                sleep(0.5)

        # print('[*] Temperature: {0:0.1f} C'.format(temp))
```

APPENDIX C- CODE SNIPPETS FOR DESKTOP APPLICATION

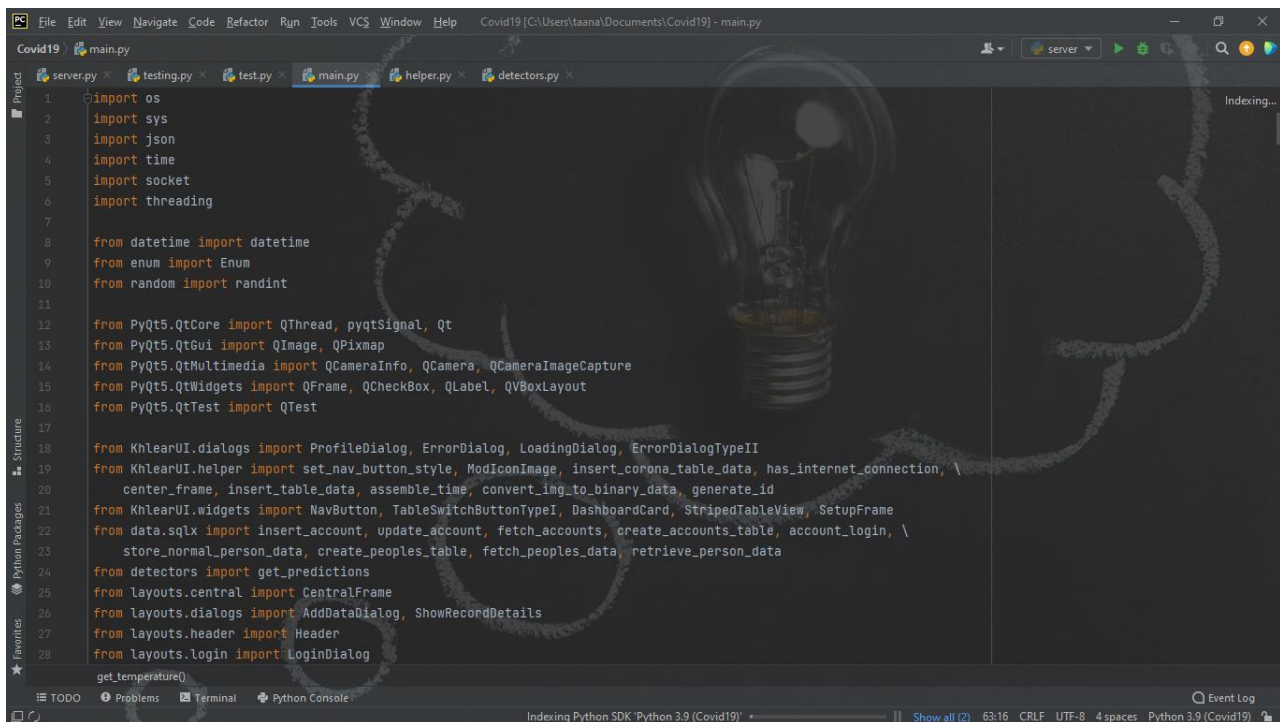

```
import os
import sys
import json
import time
import socket
import threading


from datetime import datetime
from enum import Enum
from random import randint

from PyQt5.QtCore import QThread, pyqtSignal, Qt
from PyQt5.QtGui import QImage, QPixmap
from PyQt5.QtMultimedia import QCameraInfo, QCamera, QCameraImageCapture
from PyQt5.QtWidgets import QFrame, QCheckBox, QLabel, QVBoxLayout
from PyQt5.QtTest import QTest


from KhlearnUI.dialogs import ProfileDialog, ErrorDialog, LoadingDialog, ErrorDialogTypeII
from KhlearnUI.helper import set_nav_button_style, ModIconImage, insert_corona_table_data, has_internet_connection, \
    center_frame, insert_table_data, assemble_time, convert_img_to_binary_data, generate_id
from KhlearnUI.widgets import NavButton, TableSwitchButtonTypeI, DashboardCard, StripedTableView, SetupFrame
from data.sqlx import insert_account, update_account, fetch_accounts, create_accounts_table, account_login, \
    stone_normal_person_data, create_peoples_table, fetch_peoples_data, retrieve_person_data

from detectors import get_predictions
from layouts.central import CentralFrame
from layouts.dialogs import AddDataDialog, ShowRecordDetails
from layouts.header import Header
from layouts.login import LoginDialog

get_temperature()
```

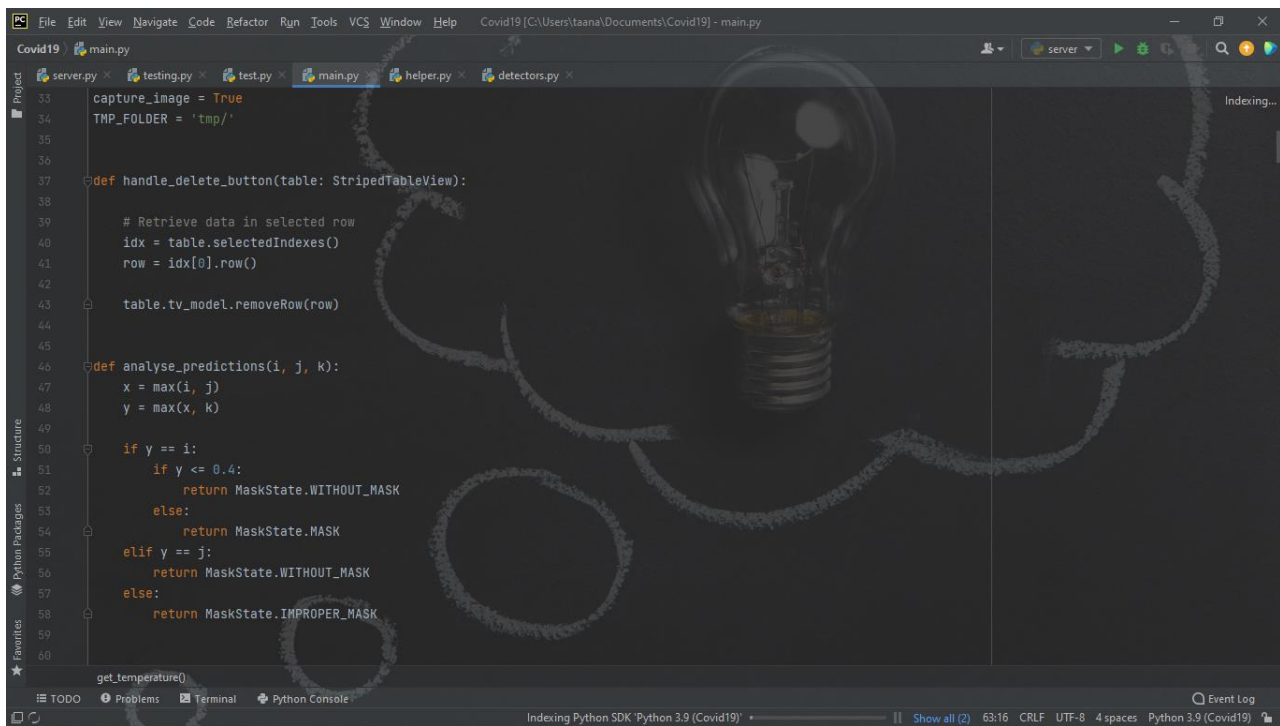


```
File Edit View Navigate Code Refactor Run Tools VCS Window Help Covid19 [C:\Users\taana\Documents\Covid19] - main.py
Covid19 main.py
server.py testing.py test.py main.py helper.py detectors.py
33 capture_image = True
34 TMP_FOLDER = 'tmp/'
35
36
37 def handle_delete_button(table: StripedTableView):
38
39     # Retrieve data in selected row
40     idx = table.selectedIndexes()
41     row = idx[0].row()
42
43     table.tv_model.removeRow(row)
44
45
46 def analyse_predictions(i, j, k):
47     x = max(i, j)
48     y = max(x, k)
49
50     if y == i:
51         if y <= 0.4:
52             return MaskState.WITHOUT_MASK
53         else:
54             return MaskState.MASK
55     elif y == j:
56         return MaskState.WITHOUT_MASK
57     else:
58         return MaskState.IMPROPER_MASK
59
60
61 get_temperature()
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
2656
2657
2658
2659
2660
2
```

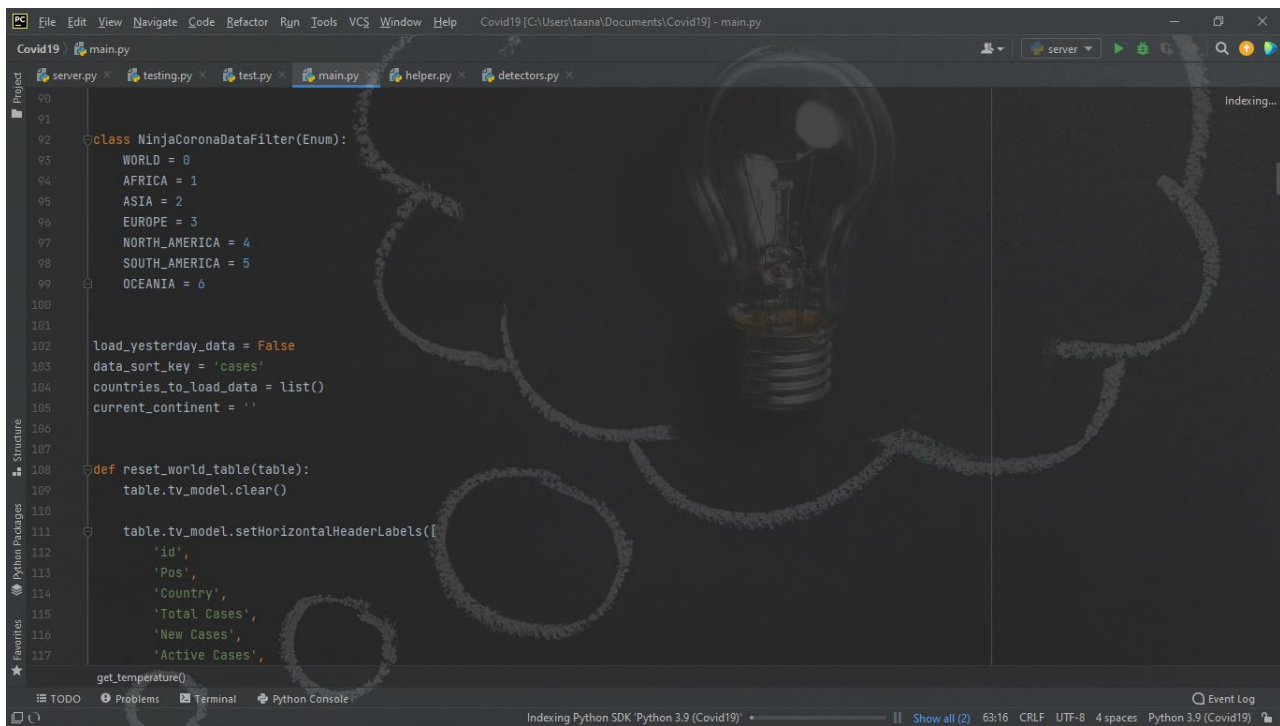


This screenshot shows the first part of a Python script in an IDE. The script defines a class `NinjaCoronaDataFilter` with an `Enum` for regions: `WORLD`, `AFRICA`, `ASIA`, `EUROPE`, `NORTH_AMERICA`, `SOUTH_AMERICA`, and `OCEANIA`. It also sets some initial variables like `load_yesterday_data`, `data_sort_key`, `countries_to_load_data`, and `current_continent`. A `reset_world_table` function is defined, which clears a table and sets its headers to 'id', 'Pos', 'Country', 'Total Cases', 'New Cases', and 'Active Cases'. The script ends with a `get_temperature()` call.

```
90
91
92 class NinjaCoronaDataFilter(Enum):
93     WORLD = 0
94     AFRICA = 1
95     ASIA = 2
96     EUROPE = 3
97     NORTH_AMERICA = 4
98     SOUTH_AMERICA = 5
99     OCEANIA = 6
100
101
102 load_yesterday_data = False
103 data_sort_key = 'cases'
104 countries_to_load_data = list()
105 current_continent = ''
106
107
108 def reset_world_table(table):
109     table.tv_model.clear()
110
111     table.tv_model.setHorizontalHeaderLabels([
112         'id',
113         'Pos',
114         'Country',
115         'Total Cases',
116         'New Cases',
117         'Active Cases',
118     ])
119
120 get_temperature()
```

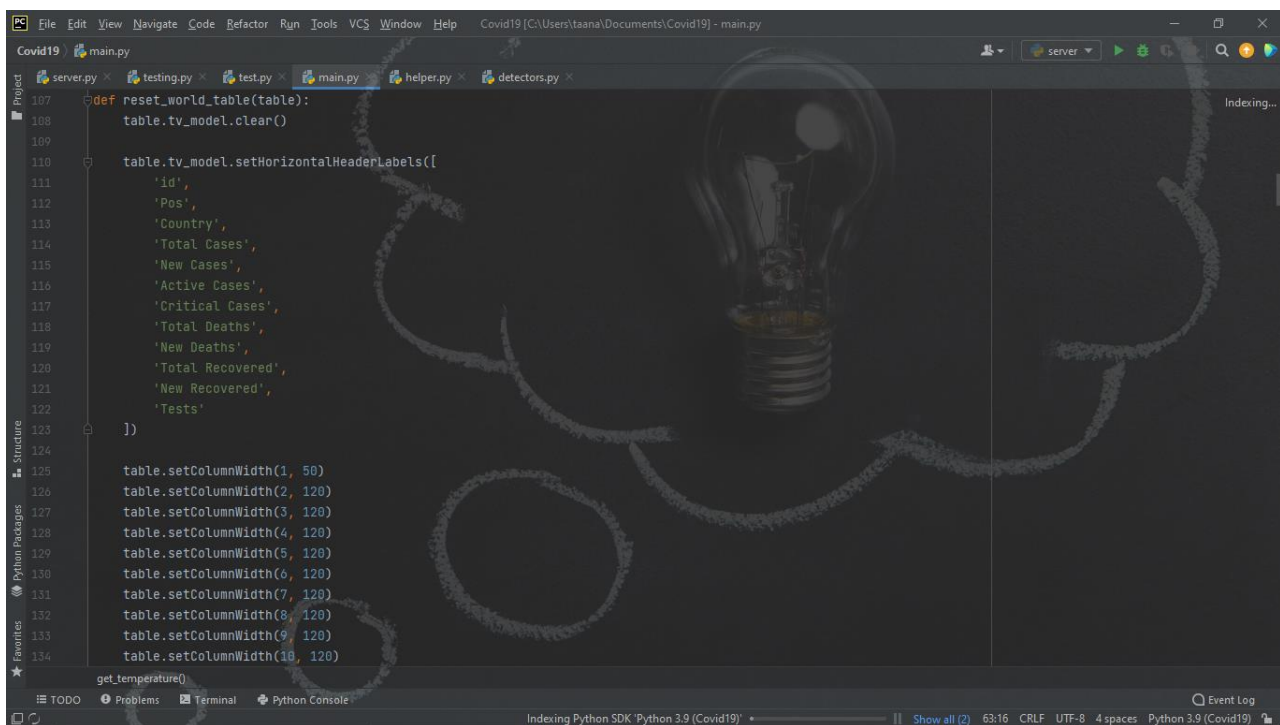


This screenshot shows the second part of the Python script. It continues the `reset_world_table` function by adding more headers to the table: 'Critical Cases', 'Total Deaths', 'New Deaths', 'Total Recovered', 'New Recovered', and 'Tests'. After closing the list, it sets column widths for each of the 10 columns. The script ends with a `get_temperature()` call.

```
107 def reset_world_table(table):
108     table.tv_model.clear()
109
110     table.tv_model.setHorizontalHeaderLabels([
111         'id',
112         'Pos',
113         'Country',
114         'Total Cases',
115         'New Cases',
116         'Active Cases',
117         'Critical Cases',
118         'Total Deaths',
119         'New Deaths',
120         'Total Recovered',
121         'New Recovered',
122         'Tests'
123     ])
124
125     table.setColumnWidth(1, 50)
126     table.setColumnWidth(2, 120)
127     table.setColumnWidth(3, 120)
128     table.setColumnWidth(4, 120)
129     table.setColumnWidth(5, 120)
130     table.setColumnWidth(6, 120)
131     table.setColumnWidth(7, 120)
132     table.setColumnWidth(8, 120)
133     table.setColumnWidth(9, 120)
134     table.setColumnWidth(10, 120)
135
136 get_temperature()
```
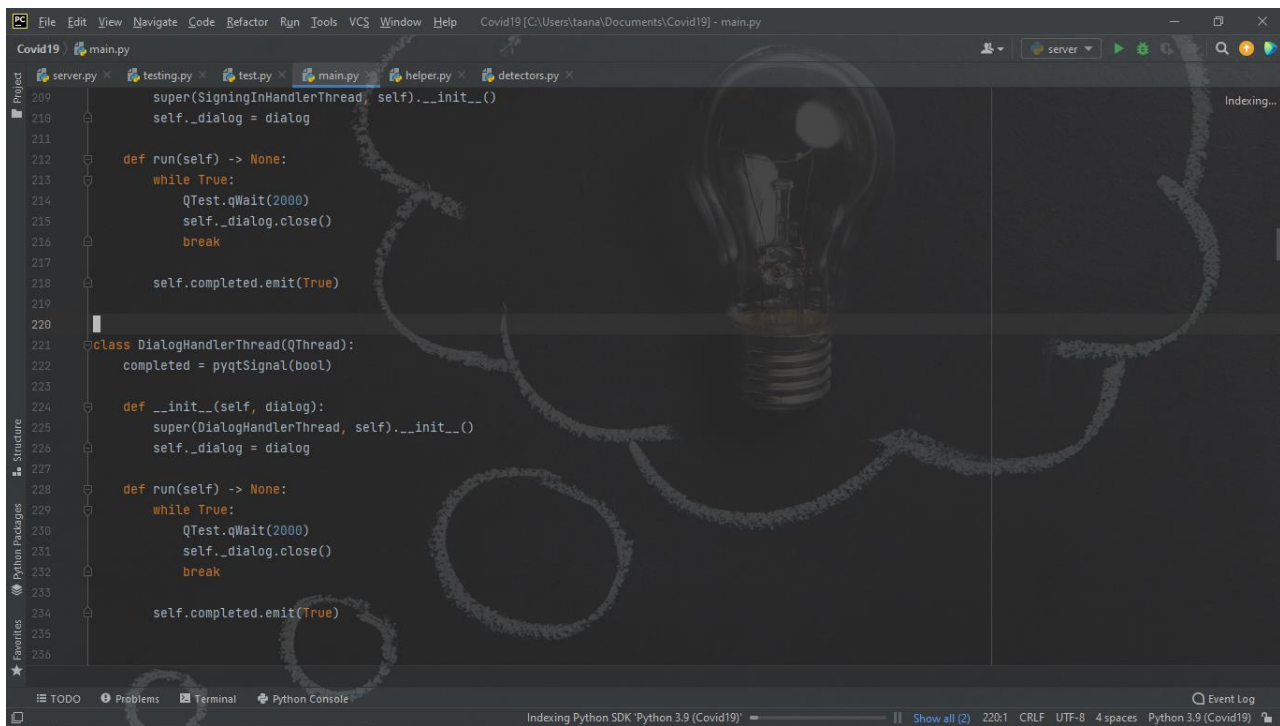
```
209 super(SigningInHandlerThread, self).__init__()
210 self._dialog = dialog
211
212 def run(self) -> None:
213     while True:
214         QTest.qWait(2000)
215         self._dialog.close()
216         break
217
218     self.completed.emit(True)
219
220
221 class DialogHandlerThread(QThread):
222     completed = pyqtSignal(bool)
223
224     def __init__(self, dialog):
225         super(DialogHandlerThread, self).__init__()
226         self._dialog = dialog
227
228     def run(self) -> None:
229         while True:
230             QTest.qWait(2000)
231             self._dialog.close()
232             break
233
234         self.completed.emit(True)
235
236
```

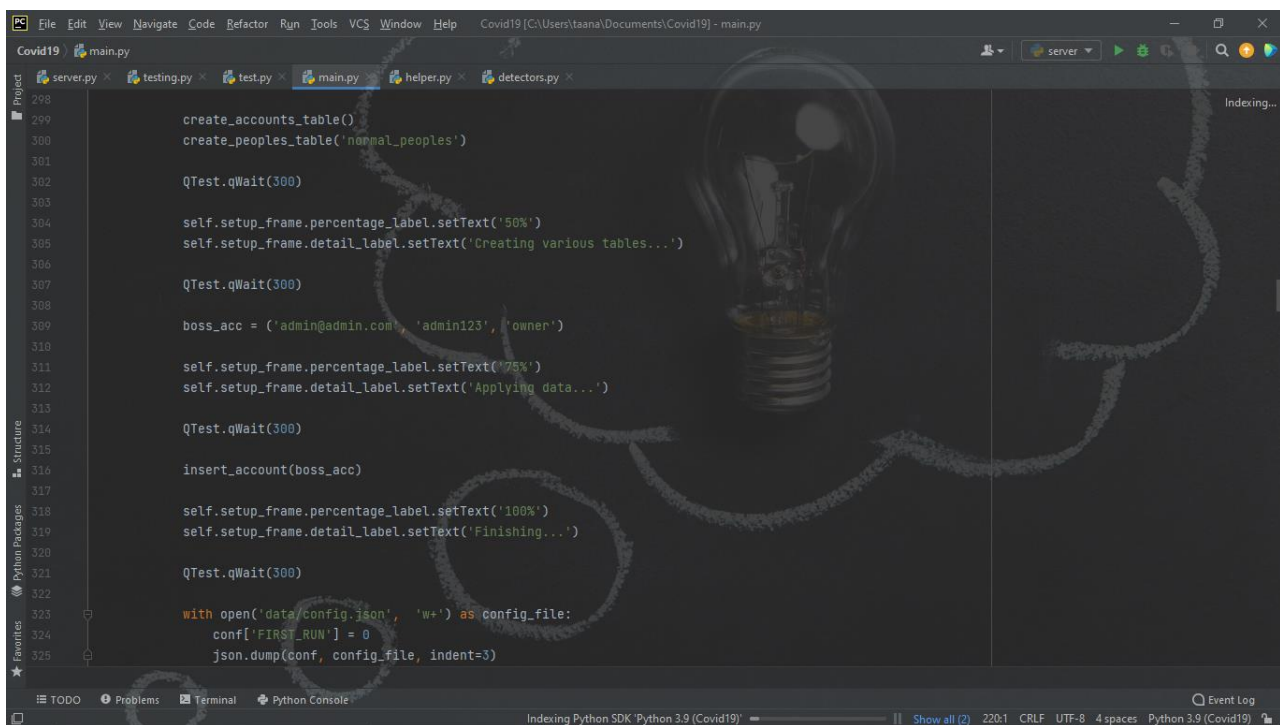

```
298
299 create_accounts_table()
300 create_peoples_table('normal_peoples')
301
302 QTest.qWait(300)
303
304 self.setup_frame.percentage_label.setText('50%')
305 self.setup_frame.detail_label.setText('Creating various tables...')
306
307 QTest.qWait(300)
308
309 boss_acc = ('admin@admin.com', 'admin123', 'owner')
310
311 self.setup_frame.percentage_label.setText('75%')
312 self.setup_frame.detail_label.setText('Applying data...')
313
314 QTest.qWait(300)
315
316 insert_account(boss_acc)
317
318 self.setup_frame.percentage_label.setText('100%')
319 self.setup_frame.detail_label.setText('Finishing...')
320
321 QTest.qWait(300)
322
323 with open('data/config.json', 'w+') as config_file:
324     conf['FIRST_RUN'] = 0
325     json.dump(conf, config_file, indent=3)
```