

Alcatel-Lucent OmniVista 2500 Network Management System

The [Alcatel-Lucent OmniVista® 2500 Network Management System \(NMS\)](#) provides cohesive management and network-wide visibility, increasing IT efficiency and business agility. It provides a full set of management tools for converged mobile campus. This single platform enables operators to easily provision, manage and maintain a unified Campus Mobile infrastructure with its network elements, alarms, unified access security policies, and virtualization. It also provides advanced network analytics for a full visibility into wired-wireless devices, IoT endpoints and applications, as well as predictive analysis for forward planning



Providing a network-wide management system for the Alcatel-Lucent Enterprise Network portfolio, the OmniVista 2500 NMS provides a comprehensive set of components and tools for campus mobile infrastructure configuration, monitoring, security, device configuration, alert management, to accelerate, downtime resolution, and overall management.

Features	Benefits
High performances	<ul style="list-style-type: none"> Available as a virtual appliance for major virtualization environment and hypervisors Scalable platform accommodating large campus mobile infrastructure Operating in High-Availability Mode (HA) with Active/Stand-by support for Mission-critical deployment
Open platform	<ul style="list-style-type: none"> Northbound RESTful API for easy integration network management functions with third-party Eco-system applications
Ease of use	<ul style="list-style-type: none"> Web-based user interface for comprehensive, network-wide management platform, increasing IT efficiency and business agility Customizable dashboard that can be tailored to the network administrator's or critical management functions
Geo-location-based topology	<ul style="list-style-type: none"> Geo-location topology provides intuitive visualization of all network equipment a based on their Geo-location topology provides intuitive visualization of all network equipment based on their actual GPS coordinates and their site assignment
Topology	<ul style="list-style-type: none"> Unified Network topology for WLAN & LAN Infrastructure Advanced multilevel discovery view to create comprehensive logical and physical maps with L2 and L3 Protocols support
Unified provisioning for campus mobile	<ul style="list-style-type: none"> Reduced campus mobile administration time and effort while providing consistent network experience across LAN and WLAN services
Unified Access with Authentication Policy Manager	<ul style="list-style-type: none"> Single Policy Management of the entire Network with UPAM (Unified Policy Authentication Management) Authentication Policy Manager Authentication Policy Manager services: <ul style="list-style-type: none"> Unified access provisioning provides a single set of policy enforcement instructions for both wired and wireless users, with authentication strategies (LDAP, Radius, Active Directory) BYOD (Bring Your Own Devices) integration with UPAM to provide full management and consistency of services Fully customizable Captive Portal with integrated credentials management for email, sms, social Login (Facebook, Google, Rainbow) Simplifies configuration change management through scheduling and backup operations for Stellar Access Points and OmniSwitches Network device Software and firmware update for version baselining Simplified Return Material Authorization (RMA) device swap via Golden Configuration support and Resource Manager backup features
Provisioning automation	<ul style="list-style-type: none"> Automates roll-out of consistent device configuration and translates in-to translates into deployment of specific device configuration based on network services, including Network Fabric with SBP-M automation Allows off-the shelf OmniSwitches to be provisioned simply by connecting to the network Policy-driven provisioning and automation allowing compliance enforcement for provisioning best practices Lower costs by enabling deployment of new devices in minutes, and without on-site support visits, eliminates repetitive tasks and onsite support visits
Mobile Companion Assistant	<ul style="list-style-type: none"> OmniVista Assistant, an Android Mobile application operating simplifies roll-out of pre-defined devices configuration from OmniVista Templates based Provisioning Reduce the time and the complexity to activate and commission the device without networking skills
Real-time network Monitoring	<ul style="list-style-type: none"> Network Operating Center (NOC) style topology provides global visibility of all network equipment in a single view with real-time view of devices, clients, alarms and events with remediation actions Real-time monitoring and analysis of critical network performance indicators through visual widgets
Smart Analytics	<ul style="list-style-type: none"> Network analytics monitor the network bandwidth and key traffic patterns through advanced collection and reporting capabilities. This provides insights for the IT department and CIO on how network resources are consumed, making it possible to proactively optimize the end-user experience
IoT Enablement	<ul style="list-style-type: none"> Know your network with a single pane of glass for Inventory view- from traditional IT managed devices up to hard to detect endpoints Real-time wired-wireless endpoints inventory with Cloud based device fingerprinting solution for most diversified network environments with advanced contextual information IoT focus dashboard widgets facilitate the operational management for faster time to decision and better understanding of the IoT population IoT Policy Enforcement with access role profiles automates network-wide access based on IoT classification

Features	Benefits
Application Visibility	<ul style="list-style-type: none"> • Application Visibility, with application monitoring, helps IT organizations to get a better understanding of bandwidth consumption per application • Provides network-wide user-based policies for bandwidth prioritization and enforcement actions • Application Visibility-optimized IT operations, allow better security compliance and network resource use
Intrusion Control	<ul style="list-style-type: none"> • Provides an open approach by integrating with third-party intrusion detection/ protection solutions (IDS/IPS), or any other intrusion notifications, leveraging security and traffic monitoring built into ALE OmniSwitch® and OmniAccess® Stellar solutions
Data center and virtualization environment	<ul style="list-style-type: none"> • Creates seamless, fully integrated management for virtual machine (VM) movements and ensures that environment network policies move with the Virtual Machine • Open approach supporting all leading Virtualization environment and hypervisors

Features

Platform

- Enterprise class, web-based consolidated network management application for network provisioning, troubleshooting, performance analysis and configuration operations for AL-e OmniSwitches and Stellar Access Points
- Unified workflow for network services, resources, and users for wired and wireless infrastructure
- Northbound interface RESTful APIs for application interoperability and ecosystem support

Deployment

- Available as a virtual software appliance for full turnkey operation, supporting leading Hypervisors and operating systems
- Available in High Availability mode for mission critical deployment with Active-Stand-by operations over Layer 2 and Layer 3 for Wired and Wireless deployments

User interface

- Web-based client, allowing access through any browser, including mobile browsers
- User interface follows Web 2.0 principles, responsive web design enabling easy navigation, consistent workflow, and user experience

Geo-location topology

- Google map integration by displaying devices or network sites by its physical location address or by its GPS coordinates
- Display device list, equipment status associated to a geographical site

Network discovery

- Detailed discovery of Alcatel-Lucent Enterprise OmniSwitches and third-party devices over SNMP v2c/v3
- Registration for Stellar Access Points with wireless & RF services configuration

Topology

- HTML5 topology with overlay display for Wired/wireless devices and virtual chassis
- Hierarchical Map layout for large infrastructure
- Network visualization for logical and physical infrastructure, with actual adjacency info and live device status
- Layer 2, LLDP adjacency views
- IP subnet, ERP, SPB-M protocol views
- Dynamic, customizable, logical map based on user-defined filters (IP subnet, location, device model, user-provided descriptive info, custom maps)

Network Fabric configuration

- Shortest Path Bridging (SPB-M) Graphical provisioning tool simplified all configuration steps required to define and select devices part of the SPB backbone and create all basic and advanced Service parameters (ISID, SAP, BVLAN) through One-Touch simplified Workflow, reducing the complexity and time to roll-out resilient network infrastructure
- Advanced Shortest Path Bridging (SPB-M) Protocol view and monitoring from the Topology application, including visualization of the SPB-M configured devices, status for Services configured by devices such as Service Distribution points (SDP) and Service Access Points (SAP)

Dashboard

- Real-time monitoring and analysis of critical network performance indicators through visual widgets for LAN and Stellar Access Points Stellar wireless access points
- Full choice of displays, data and other important network and device for wired and Wireless performances management information, with advanced reporting capabilities

Network administration controls

- Provides network administrators with both the tools and the ability to grant access to only those features and resources operators need with role-based administrative controls
- Provides controls to support IT for best practices. Management rights and access to all devices managed by OmniVista 2500 are granted through operator groups, device groups, and custom views of the devices with fine granularity on the authorized feature set
- Secure administration credentials with authentication over RADIUS for network administration user and user groups

Notification manager

- Monitors and analyzes alerts, notifications, and network performance from Alcatel-Lucent Portfolio and third-party devices in real time
- Advanced alert capabilities through customizable filters and sorting capabilities
- Remediation and notification actions based on predefined conditions with a single click

Locator

- Rapid troubleshooting and isolation of network issues through one-click mitigation
- Allows administrators to quickly search and pinpoint device location and associated devices, based on multiple criteria and live or historical searches
- Discovers third-party devices and indicates the nearest device that runs the Alcatel- Lucent operating system and to which the third-party device can be switched, showing the link on a topology map
- Expedites troubleshooting and problem resolution with right-click contextual menu and direct interaction with other OmniVista 2500 NMS components

Resource manager

- Manages complete device configuration life cycle (Back-up, Restore)
- Automation tools to create infrastructure wide software image update for baseline version management for Stellar Access Point and OmniSwitches

Template-based provisioning

- Automatically roll out consistent provisioning policies and pushed device configuration
- Allows off the-shelf OmniSwitches devices to be provisioned simply by connecting to the network
- Enforce Golden configuration and best practices by monitoring compliance and audit reporting

Thin Switch Management

- Secure Provisioning mode for OmniSwitches enhancing security by preventing critical device configuration files to be stored locally at the switch level
- Centralized Configuration allowed only from OmniVista; no local configuration changes permitted through Command line interface (CLI) once operating in Thin Switch mode

Network analytics

- Provides insight in the network health with advanced graphical analytics on most problematic devices based on device state (CPU, memory, temperature)
- Wireless performances insights and KPIs for Stellar APs (Health, SSID, throughput, band utilization)
- Monitors network bandwidth and traffic patterns down to the device port level through sflow® sampling collection and reporting
- Provides valuable insights into the applications (Top N apps) that are consuming the most network bandwidth, monitors application traffic arriving from users (Top N talkers), and stores and displays flow data with up to one-minute granularity
- Provides insight in the network health with advanced graphical analytics on most problematic switches based on device state (CPU, memory, temperature) and on PoE (Power over Ethernet) for power utilization at Port or switch level for trending analysis
- Enables automatic generation of business centric, CIO-oriented graphical analytics reports for network

Predictive analytics

- Improves network health by providing capacity trending analysis, application on-port utilization, and potential anomalies in the on-port utilization that could impact network health and operational performance, thus enabling an enhanced end-user experience
- Threshold alert on trend projections and network anomalies, accelerating issue resolution by quickly identifying root causes and early warning signs of situations that could lead to outages, thus reducing downtimes
- Identifies new network resource requirements or needs for network redesign at an early stage, before they become a problem, thus streamlining network deployment

Application visibility

- Provides Application Visibility through extensive application monitoring, for network-wide application inventory and use, allowing a better understanding of bandwidth consumption across wired and wireless networks
- Allows centralized policy enforcement and application usage policy for the discovered applications by applying QoS policy enforcement such as, rate limiting, blocking and application prioritization across Stellar Aps and OmniSwitches
- Automatic update for application signature for efficient application monitoring deployment
- Improves user experience and business outcome with embedded analytics engine, showing in depth application usage reports and key measurement indicators

Unified Access Management

- Reduced administration time and effort while providing consistent network experience across LAN and WLAN services
- Single troubleshooting environment and notification support for Wired and Wireless devices, with advanced filtering and triage capabilities to accelerate resolution


Universal Policy Authentication

- Unified user interface for wired and wireless role profiles for user-based access
- Flexible authentication strategy with easy configuration for end-user profile definition allowing appropriate network access rights and dynamic business policies
- IPv6 client on-boarding including authentication and authorization extending the Unified Access policy framework

Captive Portal

- Integrated captive portal with credentials management for email, sms, social Login Facebook, Google, Rainbow)
- External captive portal redirection (FQDN, redirect URL, Radius Server Authentication)

Figure 1. Geo-Location topology

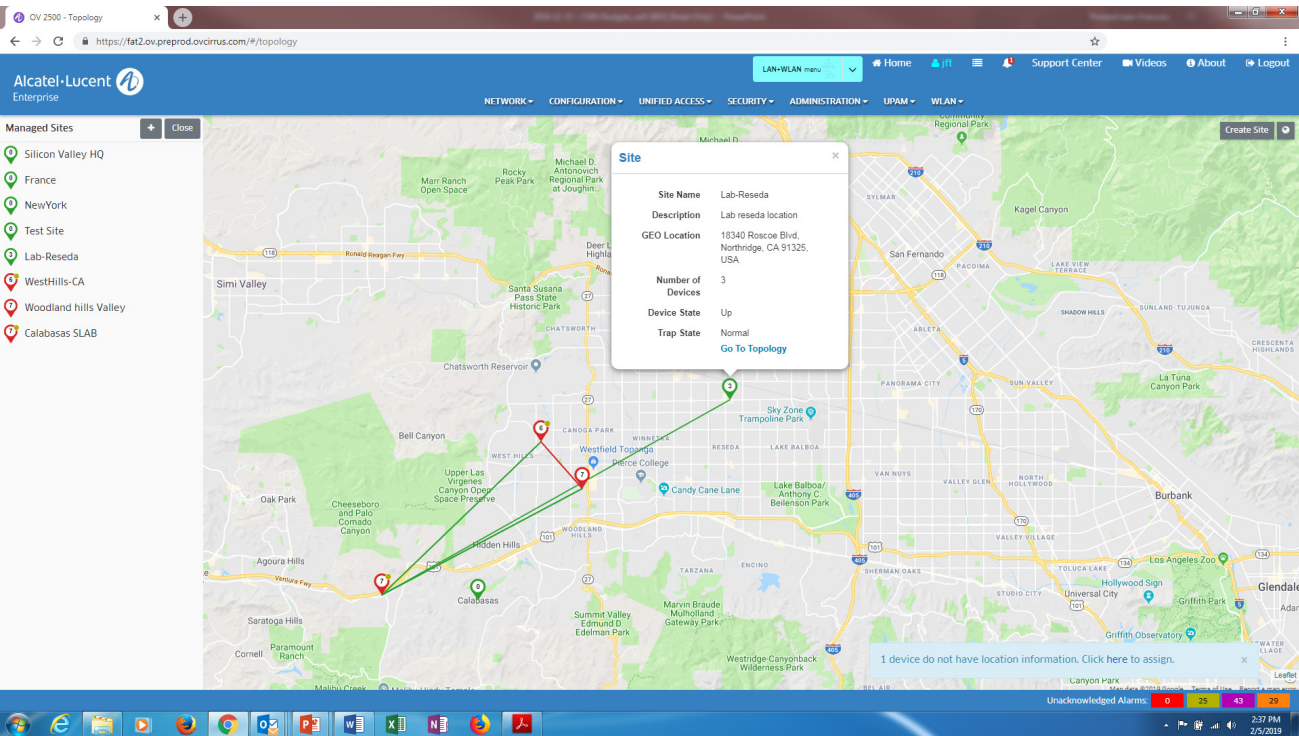

Geo-location node map shows nodes and device status in geographical context using Google map

Figure 2. Network topology view – Advanced map capabilities for wired and wireless infrastructure

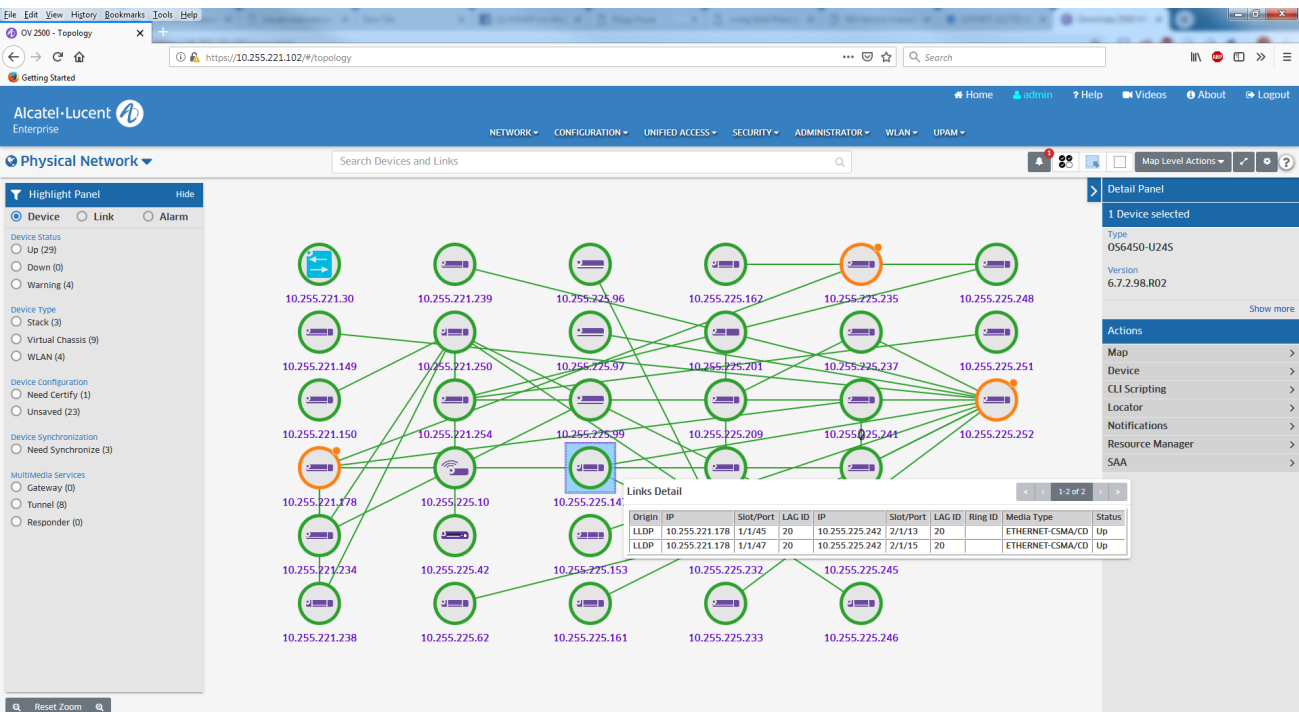


Figure 3. Dashboard - Key indicators for faults, availability and performances for wired and wireless infrastructure

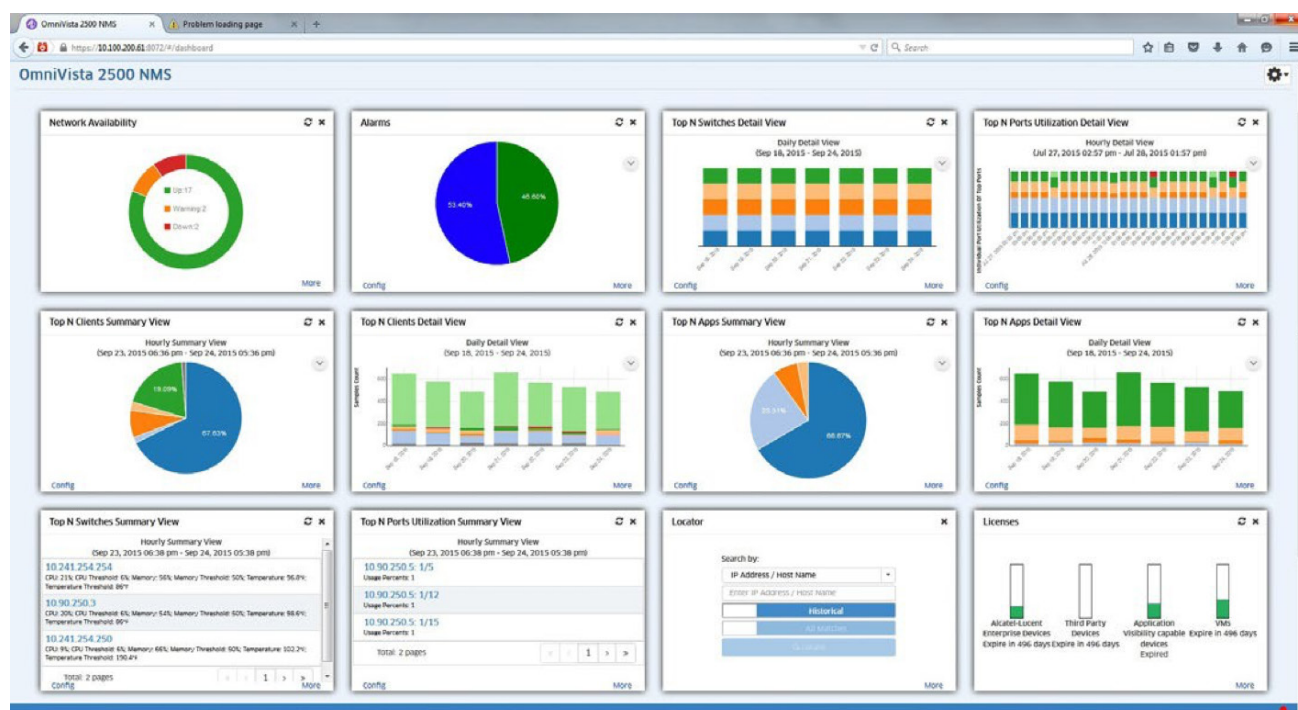


Figure 4. Policy-driven provisioning and automation reduce cost of new device deployment

Alcatel-Lucent Enterprise

LAN-WLAN menu Home 10.10.10.10 Support Center Videos About Logout

NETWORK CONFIGURATION UNIFIED ACCESS SECURITY ADMINISTRATION UPAM WLAN

PROVISIONING

Rules Results Settings

Rules

Default Mgmt Users Template

Showing All 11 Items

Serial Number/MAC	Switch Model	Provisioning Status	Switch Config Template	Value Mapping	Mgmt Users Template	Devices	Last Updated Time	Save and Certify
<input checked="" type="checkbox"/> R338015P	OS6450-P105	Matched		No Value Mapping	default	SW72-P105 (172.16.0.74)	Sep 11, 2019 1:38:59 PM	Yes
Serial Number/MAC	R338015P	Provisioning Status			MATCHED			
Switch Model	OS6450-P105	Devices			SW72-P105 (172.16.0.74)			
Switch Config Template		Last Updated Time			Sep 11, 2019 1:38:59 PM			
Value Mapping	No Value Mapping	Save and Certify			Yes			
Mgmt Users Template	default							
<input type="checkbox"/> R148029P		Set up		No Value Mapping	default		Sep 17, 2019 11:29:22 AM	Yes
<input type="checkbox"/> U408029P		Set up		No Value Mapping	default		Sep 17, 2019 11:27:26 AM	Yes
<input type="checkbox"/> U498085P		Matched		No Value Mapping	snmpRwNonDef	HAN-Blog-A-P24Z	Sep 18, 2019 11:45:58 AM	Yes
<input type="checkbox"/> R338006P		Matched	extravlan	No Value Mapping	snmpRwNonDef	OS64-P105-70 (172.16.0.74)	Oct 4, 2019 6:03:52 PM	Yes
<input type="checkbox"/> V4781650		Set up		No Value Mapping	snmpRwNonDef		Oct 4, 2019 6:47:28 PM	Yes
<input type="checkbox"/> A113000019		No Match		No Value Mapping	default		Oct 4, 2019 1:39:32 PM	Yes
<input type="checkbox"/> U4080210		Matched		No Value Mapping	default	GTS0 (172.20.1.7)	Oct 4, 2019 1:39:32 PM	Yes
<input type="checkbox"/> P1285641		No Match		No Value Mapping	default		Oct 4, 2019 1:40:47 PM	Yes
<input type="checkbox"/> P418012P		No Match		No Value Mapping	default		Oct 4, 2019 1:41:24 PM	Yes
<input type="checkbox"/> V4480694		No Match		No Value Mapping	default		Oct 4, 2019 1:42:13 PM	Yes

Show 1000


Showing Page 1 of 1

Unacknowledged Alarms: 995* 999* 0 999*

Figure 5. Single Pane of glass for IoT endpoints inventory

Endpoint MAC	Endpoint IP	Status	UNP	Category	VLAN/Tunnel	Port/ESSID	End Time	Manufacturer	Endpoint Name	Switch/AP Name
c8e542decb84	172.16.121.110	Active	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31			Android OS	AP-245_3040 (172.16.121)
7810b24fa5b3	0.0.0.0	Error			0	SLAB-IOT-simple-FAT31			Android OS	AP-245_3040 (172.16.121)
64eb3e1b1f34	172.16.131.85	Active	unFAT31IoTCommon	Operating System	131	SLAB-IOT-simple-FAT31			Android OS	AP-261_0530 (172.16.131)
00a7241ad03d	172.16.122.86	Active	unCommonFAT31	Audio, Imaging or Video Equipment	0	SLAB-IOT-FAT31			Vizio TV	AP-245_3040 (172.16.121)
dc16b1193f06	172.16.122.104	Active	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31			Android OS	AP-245_3040 (172.16.121)
80cc2bba0875	172.16.131.103	Active	un8021xCommon	Operating System	131	SLAB-8021x-FAT31		Murata Manufact...	Android OS	AP-261_0530 (172.16.131)
eb4d65375f5	172.16.131.88	Active	unFAT31IoTCommon	Operating System	131	SLAB-IOT-simple-FAT31			Android OS	AP-261_0530 (172.16.131)
78e103249749	0.0.0.0	Error		AmazonCustomCategory	0	SLAB-IOT-simple-FAT31		Amazon Technolog...	Amazon Alexa	AP-245_3040 (172.16.121)
70a8559630ad	172.16.121.102	Active	unFAT31IoTCommon	Operating System	0	SLAB-IOT-simple-FAT31			Android OS	AP-239_3870 (172.16.207)
38221e010982	172.16.131.95	Active	unFAT31IoTCommon	Operating System	131	SLAB-IOT-simple-FAT31			Android OS	AP-261_0530 (172.16.131)
2426aaeb8ba9	172.16.131.96	Active	unFAT31IoTCommon	Operating System	131	SLAB-IOT-simple-FAT31			Android OS	AP-261_0530 (172.16.131)
4c8f0cc4233	172.16.131.83	Active	unFAT31IoTCommon	AmazonCustomCategory	131	SLAB-IOT-simple-FAT31		Amazon Technolog...	Amazon Alexa	AP-261_0530 (172.16.131)
34808bd4af8e	172.16.122.95	Active	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31			Android OS	AP-245_3040 (172.16.121)
50dc47553e7c	172.16.131.81	Active	unFAT31IoTCommon	AmazonCustomCategory	131	SLAB-IOT-simple-FAT31		Amazon Technolog...	Amazon Fire TV	AP-261_0530 (172.16.131)
c00539152d03	172.16.121.72	Offline	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31	Monday, September 30, 20...		Android OS	AP-245_3040 (172.16.121)
eb829e224591	172.16.121.116	Active	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31			Android OS	AP-245_3040 (172.16.121)
db3464300e09	172.16.122.108	Offline	unFAT31IoTCommon	Operating System	0	SLAB-IOT-simple-FAT31	Monday, September 30, 20...		Android OS	AP-245_3040 (172.16.121)
dc28e478e217	172.16.122.103	Offline	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31	Monday, September 30, 20...		Android OS	AP-245_3040 (172.16.121)
e0e1c215d9bc	172.16.131.87	Active	unFAT31IoTCommon	Operating System	131	SLAB-IOT-simple-FAT31			Android OS	AP-261_0530 (172.16.131)
4c7ce1448f47	172.16.121.96	Offline	unCommonFAT31	Operating System	0	SLAB-IOT-FAT31	Monday, September 30, 20...		Android OS	AP-245_3040 (172.16.121)
b8b3f1297e0f	172.16.121.91	Offline	unFAT31IoTCommon	Operating System	0	SLAB-IOT-simple-FAT31	Monday, September 30, 20...		Android OS	AP-245_3040 (172.16.121)

Figure 6. Heatmap for optimizing Wi-Fi coverage and wireless performance

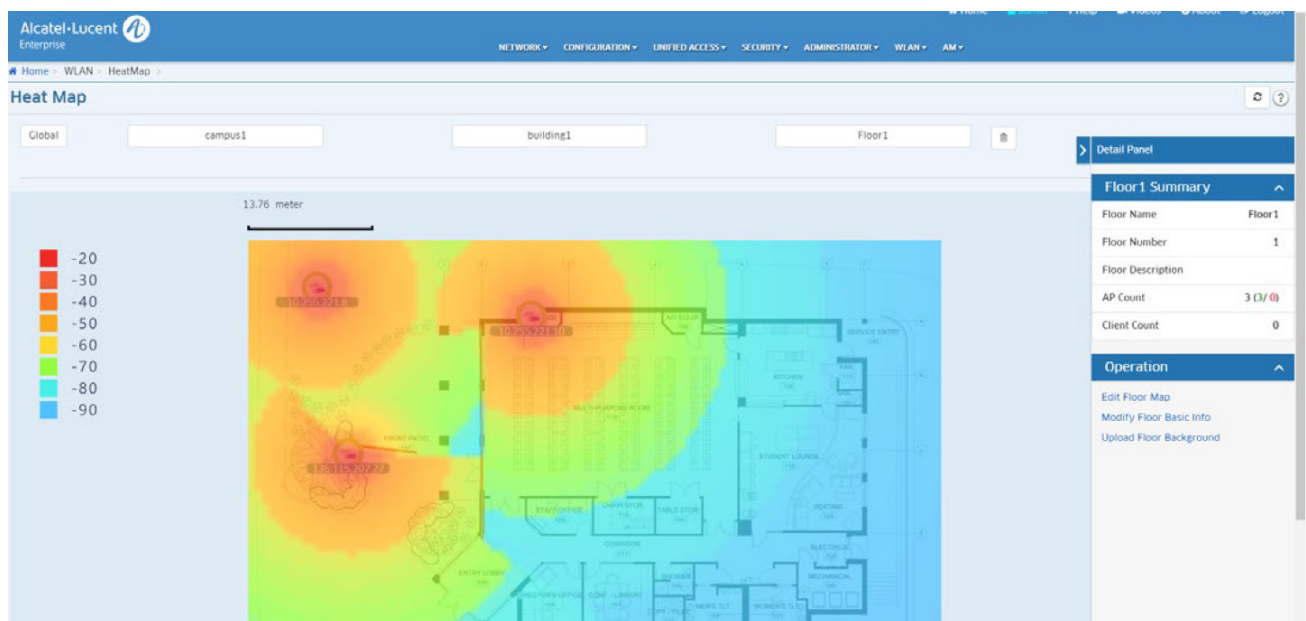

Quarantine Manager

- Provides threat mitigation through a secure perimeter against intrusion and malware attacks
- Provides mitigation and remediation through various actions (quarantine VLAN, port shutdown, blocking MAC addresses)

Virtual Machine Manager

- Single pane-of-glass for end-to-end physical and virtual networks infrastructure operations
- Agnostic support, Interfaces with VMware vCenter®, Microsoft Hyper-V® and Citrix™ Hypervisor for discovery and inventory
- Real-time tracking between VM and its network location

NaaS “Network as a Service” license and subscription monitoring

- Show “NaaS” subscription status for network infrastructure devices, including device mode of operation (NaaS, Capex), level of features under subscription, and subscription life cycle status

Technical specifications

Virtual appliance

- Certified hypervisors:
 - VMware ESXi™ 7.0.2, 8.0
 - Microsoft Hyper-V on Microsoft® Windows™ Server 2012 R2, 2016, 2019, 2022–MS Hyper-V on Windows 10 Professional
 - Linux-KVM/Ubuntu 22.04
- Minimum requirements (single instance configuration)
 - Intel® Pentium™ 2.4 GHz with eight Logical processors
 - 20 GB RAM - Minimum RAM reserved for the virtual appliance
 - 500 GB free disk space
- Minimum requirements (High- Availability configuration)
 - Intel® Pentium™ 2.4 GHz with eight Logical processors
 - 20 GB RAM - Minimum RAM reserved for the virtual appliance
 - 500 GB free disk space

Certified Web browsers

- Google Chrome 65+ for Windows PC and Linux clients
- Mozilla® FireFox™ 59+ for Windows PC and Linux clients
- Microsoft Edge Chromium for Windows PC client

OmniVista 2500 NMS client

- PC Client Minimum configuration
 - Microsoft Windows, Red Hat ES, SUSE LP (32- and 64-bit versions)
 - Intel Pentium Dual Core 2.4 GHz minimum
 - 8 GB RAM
- Mobile device
 - iOS release 10.0 min & Android release 7.0 min
 - Google Chrome 65+

Certified AOS releases and models

- OmniSwitches series with AOS 8.9R4 MR and higher
- OmniSwitches series with AOS 8.10R2 and higher
- OmniSwitches series with AOS 8.4.1 and higher
- OmniSwitches series with AOS 6.7.2 and higher
- OmniSwitches series (OS2260 & OS2360) with AOS 5.1R1

Thin Switch Management

- OmniSwitches series with AOS 8.8.1 and higher

Unified role-based profiles with UPAM support

- OmniAccess Stellar Series (AP1101, AP1201, AP1201H, AP1221, AP1222, AP1231, AP1232, AP1251) with Stellar AWOS 3.0.6 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1321, AP1322, AP1361, AP1362) with Stellar AWOS 4.0.0 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1301, AP1311) with Stellar AWOS 4.0.2 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1331) with Stellar AWOS 4.0.3 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1301H) with Stellar AWOS 4.0.4 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1400 series) with Stellar AWOS 4.0.7 in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1500 series) with Stellar AWOS 5.0.1 in Wi-Fi Enterprise mode

Application visibility

- OmniSwitch 6860 and 6860E with AOS release 8.4.1 or higher
- OmniSwitch 6860N with AOS Release 8.7R2
- OmniAccess Stellar series (AP1201, AP1221, AP1222, AP1231, AP1232, AP1251) with Stellar AWOS 3.0.6 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1321, AP1322, AP1361, AP1362) with Stellar AWOS 4.0.1 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1351), with Stellar AWOS 4.0.3 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1301H, AP1331) with Stellar AWOS 4.0.4 operating in Wi-Fi Enterprise mode

IoT visibility

- OmniAccess Stellar Series (AP1101, AP1200 Series) with Stellar AWOS 3.0.7 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1300 Series) with Stellar AWOS 4.0.0 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1311, AP1301) with Stellar AWOS 4.0.2 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series AP1351 with AWOS 4.0.3 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1301H, AP1331) with AWOS 4.0.4 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1400 Models) with AWOS 4.0.7 operating in Wi-Fi Enterprise mode
- OmniAccess Stellar Series (AP1500 Models) with AWOS 5.0.1 operating in Wi-Fi Enterprise mode

IPv6

- IPv6 supported on Wireless clients for Unified Access, locator and Authentication related applications such as Captive Portal with Stellar Access Points supporting AWOS 3.0.6 in Wi-Fi Enterprise mode

Third-party systems interoperability

- Virtual Machine Manager hypervisor interoperability
 - VMware vCenter™ Standard Release 6.0 and higher
 - Microsoft Hyper-V 2012 & 2016
 - Citrix Hypervisor Advanced and Enterprise Release 6.5 and higher

Performances and scalability

- Up to 5000 network devices including 4000 Stellar Access Points either in Single Instance or in High availability deployment

Ordering information

Alcatel-Lucent OmniVista® 2500 NMS follows a “Pay-as-you-Grow” flexible licensing model. The licensing model covers network infrastructure such as Alcatel-Lucent Enterprise Portfolio (Switches and Access points) and third-party devices under supervision (NM series), as well as Alcatel-Lucent OmniAccess® Stellar Access Point series for unified management (AP series). The OmniVista 2500 embedded Unified Policy Authentication Manager (UPAM) provides advanced authentication functionalities, covered by supplemental licenses, for guest access (“GA” license series) and BYOD for on-boarding devices (“BYOD” license series). The optional Virtual Machine Manager (VMM license series) provide support for datacenter virtualization support such as virtual machine inventory and tracking.

Platform management license

STARTER PACK (OV4-START-NEW) is the starting element for each Omnivista 2500 Configuration. This is mandatory, first component for each configuration. High Availability (HA) Platform license provides optional Software service for critical infrastructure deployment for Active-Stand-by configuration.

Network management (“NM”) licenses provide device management for advanced provisioning, monitoring and analytics for ALE devices. An NM license includes third-party node management capabilities, such as

discovery, topology and troubleshooting for Simple Network Management protocol (SNMP) capable third-party devices. Network management licenses are available in various quantities and can be combined to match any required configuration.

Part number	Description
OV4-START-NEW	STARTER PACK- NEW Deployment - Virtual appliance for OmniVista 2500 NMS application. Configuration starter includes nodal and AP management licenses (10 for ALE nodes, 10 for third-party devices, 10 for Alcatel-Lucent Stellar AP series with additional licenses for BYOD on boarding devices (10 BYOD), 10 guest access (10 GA), and VMM application (10 VMs).
OV4-NMS-HA	HIGH AVAILABILITY license – Optional Software feature license for High Availability Service. One license required per OmniVista 2500 NMS Configuration. Provide Master/secondary failover for OmniVista 2500 platform covering all functionalities including Wireless management and UPAM.
OV-NM-EX-10-N	NODE MANAGEMENT EXTENSION 10 nodes - NEW Deployment. Additional node management license for 10 Alcatel-Lucent Enterprise nodes and 10 third-party devices. One license is required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.
OV-NM-EX-20-N	NODE MANAGEMENT EXTENSION 20 nodes - NEW Deployment. Additional node management license for 20 ALE nodes and 20 third-party devices. One license required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.
OV-NM-EX-50-N	NODE MANAGEMENT EXTENSION 50 nodes - NEW Deployment. Additional node management license for 50 ALE nodes and 50 third-party devices. One license required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.
OV-NM-EX-100-N	NODE MANAGEMENT EXTENSION 100 nodes - NEW Deployment. Additional node management license for 100 ALE nodes and 100 third-party devices. One license required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.

Part number	Description
OV-NM-EX-500-N	NODE MANAGEMENT EXTENSION 500 nodes - NEW Deployment. Additional node management license for 500 Alcatel-Lucent Enterprise nodes and for 500 third-party devices. One license required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.
OV-NM-EX-1K-N	NODE MANAGEMENT EXTENSION 1000 nodes - NEW Deployment. Additional node management license for 1000 ALE nodes and for 1000 third-party devices. One license required per physical unit for VC and stack configurations for ALE nodes. Application Visibility included for supported devices.

Node management license

Network management ("NM") licenses provide device management for advanced provisioning, monitoring and analytics for ALE devices, including Application Visibility and signature updates for Alcatel-Lucent OmniSwitch® 6860/6860E/OS6860N series. An NM license includes third-party node management capabilities, such as discovery, topology and troubleshooting for Simple Network Management protocol (SNMP) capable third-party devices. Network management licenses are available in various quantities and can be combined to match any required configuration.

Part number	Description
OV4-START-NEW	STARTER PACK- NEW Deployment - Virtual appliance for OmniVista 2500 NMS application. Configuration starter includes nodal and AP management licenses (10 for ALE nodes, 10 for third-party devices, 10 for Alcatel-Lucent Stellar AP series with additional licenses for BYOD on boarding devices (10 BYOD), 10 guest access (10 GA), and VMM application (10 VMs).

Access point license

Access point ("AP") licenses provide unified management for the Alcatel-Lucent OmniAccess Stellar series (AP1101, AP1200, AP1300, AP1400, AP1500 Series). AP licenses include unified network management operations such as access point registration, topology, monitoring, converged lifecycle, application visibility for supported access point models and unified role base definition.

Wireless specific functionalities like RF management, Heatmap, WiPS (Wireless Intrusion Prevention System) are included. AP licenses are available in various quantities and can be combined to match any specific count.

Part number	Description
OV-AP-NM-XX-N	ACCESS POINT EXTENSION xx APs - NEW deployment. Unified management license for xx OmniAccess Stellar Access Point series. One license required per unit. (See note below for appropriate ordering details)

For Access point extension, replace XX by one of the following values: 10,20,50,100,500, 1K - For example OV-AP-NM-1K for an extension of 1000 Stellar APs.

Web Content Filtering license

Web Content Filtering (WCF) license offers supplemental optional functionality available to Stellar Access Point, by providing web content access rules based on content categories, and access policies enforcement by restricting traffic.

Part number	Description
OV-AP-WCF-10-N	OV-AP-WCF-10-N -Web content filtering feature license for 10 Stellar Access Points. Optional supplemental functionality. Order multiple licenses to provide adequate Stellar Access Point configuration support (supported only on AP 1300 models).

Guest Access and B.Y.O.D (Bring your own device) licenses

Guest Access & B.Y.O.D Licenses. The OmniVista 2500 Unified Policy Authentication Manager (UPAM) provides advanced authentication functionalities, covered by specific licenses, for Guest Access ("GA" license series) and B.Y.O.D for on-boarding devices ("BYOD" license series)

Part number	Description
OV-GA-XX-N	GUEST ACCESS EXTENSION for OmniAccess Stellar Solution - XX Guests - NEW deployment. Unified Policy Authentication Manager (UPAM) enables access for XX concurrent guests. (See note below for appropriate value convention)

For Guest Access extension, replace XX by one of the following values: 20,50,100,500,1000,5k,25k - For example, OV-GA-500-N for an extension of 500 Guest Access.

Part number	Description
OV-BYOD-XX-N	BYOD EXTENSION for OmniAccess Stellar Solution-XX devices - NEW deployment. Unified Policy Authentication Manager (UPAM) enables XX BYOD concurrent active devices on an ALE network. (See note below for appropriate value convention)

For Guest Access extension, replace XX by the following values: 20, 50, 100, 500, 1000, 5k,25k - For example OV-GA-500-N for an extension of 500 BYOD devices.

Virtual Machine Manager license

Virtual Machine Manager licenses are optional. This license enables features set such as VM inventory, location, and state monitoring, with all the network infrastructure provisioning automation required to move VMs. VM licenses are available in various quantities and can be combined to match any specific virtual machine count.

Part number	Description
OV-VMM-XXX-N	VMM EXTENSION - XXX VM - NEW Deployment. License for XXX VMs. Supplemental feature license for VMM applications for VM inventory, monitoring and NP (Universal Network Profile) provisioning automation for VMware vCenter, Microsoft Hyper-V and Citrix Hypervisor platforms.

For VMM extension, replace XXX by the following values: 200,500,1K - For example OV-VMM-1K-N for an extension of 1000 VMM virtual Machines.

ALE provides access to services and a continuous update maintenance support program for the OmniVista 2500 NMS.

Contact your [ALE representative](#) for further details.

