



OFFERTA *commerciale*



Cosa facciamo?

Non sei tu a dover conoscere i bandi. **Siamo noi a portarteli**, spiegarteli e **trasformarli in opportunità concrete**



**Analisi energetica
e studio di
fattibilità**



**Progettazione
tecnica su misura**



**Gestione completa
degli incentivi**



**Installazione
certificata**



**Assistenza e
monitoraggio
continuo**

Le fonti che utilizziamo

*Progettiamo e realizziamo soluzioni energetiche
ad alto valore aggiunto, sfruttando
le principali fonti rinnovabili.*



Fotovoltaico



**Eolico
Industriale**



**Biogas e
Biometano**



Micro Eolico



**Idrogeno
Verde**



NATURAL
100%

La Comunità Energetica Nazionale che produce valore locale

Energia condivisa, senza complessità

FareCER Italia è la prima Comunità Energetica Rinnovabile (CER) pensata per coinvolgere famiglie, imprese, enti pubblici e installatori, offrendo la possibilità di autoprodurre e condividere energia pulita, zero cambi di fornitore, e incentivi certi garantiti per 20 anni

Come entrare?

Produttore Inserisci il tuo impianto: risparmi e guadagni sulla produzione

Consumatore Aderisci alla comunità: benefici immediati, senza costi

Ambasciatore Aiuta a crescere la CER, raccogli incentivi



**socio
ambasciatore**

promuove la crescita della comunità; ottiene parte della “tariffa premio” per 20 anni



**socio
consumatore**

chi non ha impianti ma consuma energia condivisa. Vantaggi economici subito, senza oneri



**socio
produttore**

chi installa un impianto FV e condivide l'energia prodotta. Beneficia di risparmi in bolletta e incentivi dedicati

Offerta Commerciale

Cliente

Tipo Impianto:

☐

Fotovoltaico

☐

Mini Eolico

☐

Termico

da _____ kWp Storage da _____ kWh

Descrizione servizi inclusi

Impianto Fotovoltaico potenza nominale _____ kWp

n. _____ pannelli mod. _____ (o similari*) - _____ W monocristallino

Incluso smaltimento e ritiro dei pannelli a fine vita

n. _____ Inverter modello _____

n. _____ Sistema di Accumulo da _____ kwh Modello _____

Sopralluogo tecnico fisico e/o video call

Sistema di fissaggio aderente alla copertura esistente (copertura piana/a falda)

Quadri elettrici e cavi di collegamento

Spese di trasporto e di installazione

Redazione progetto esecutivo da professionista abilitato

Pratica per richiesta connessione al distributore e convenzione GSE (esclusi gli oneri per la distribuzione)

Dichiarazione di conformità e messa in funzione

MODALITÀ DI PAGAMENTO CONCORDATA:

FONDO PERDUTO CER € 3.600,00
(soggetto ad approvazione del GSE)
costo pratica 10% del fondo perduto

Totale Offerta (iva inclusa)

€

Totale a fine detrazione fiscale

€

** In base alla disponibilità di magazzino. In caso di cambio prodotto, la sostituzione sarà di pari valore o superiore.
La presente blocca l'offerta. Il cliente è libero e senza vincoli nel caso in cui il sopralluogo non dovesse avere esito positivo.*

Data _____ Luogo _____ Per accettazione Donati Rebecca



Meaningful Innovation.

6kW

Single Phase Hybrid Solar Inverter

05 YEAR
WARRANTY



Colorful touch LCD, IP65 protection degree

135

Max. charging/discharging current of 135A



DC couple and AC couple to retrofit existing solar system

6


6 time periods for battery charging/discharging

16

Max. 16pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Support storing energy from diesel generator

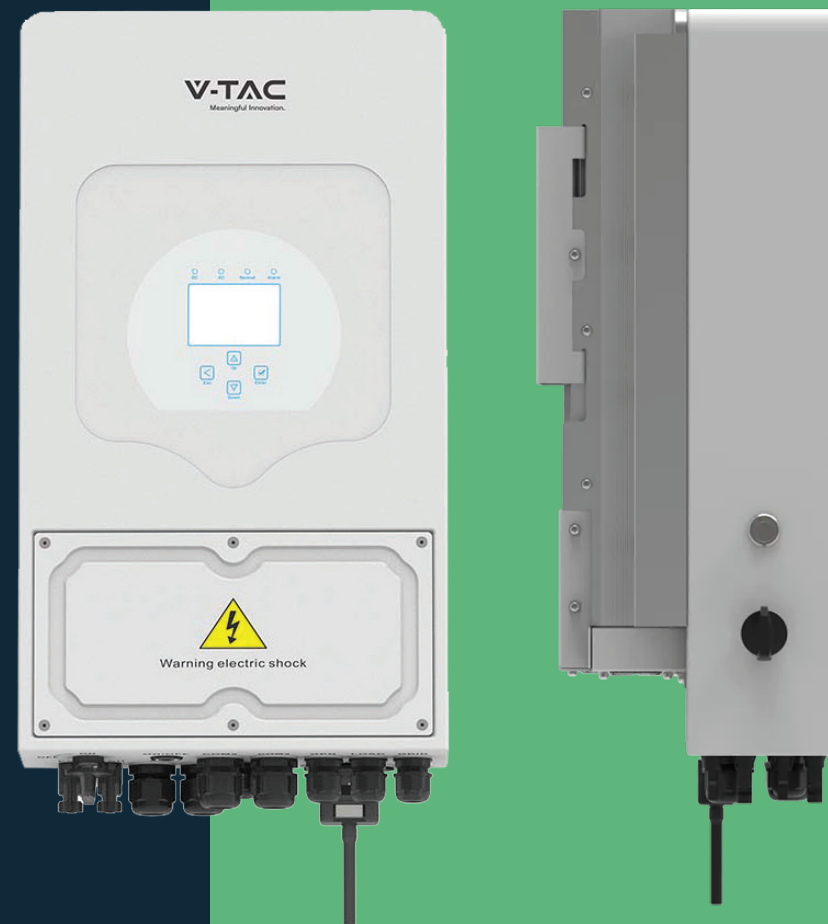

V-TAC.EU



VTACEXPORTS.COM



CE RoHS

LISTING DETAILS

SKU Code: 11529

EAN Code: 3800157693868

MASTER BOX PACKAGING

Net Weight : **24kg**

Product Size : **330W x 580H x232D**

EFFICIENCY

Max. Efficiency **97.60%**

Euro Efficiency **96.50%**

MPPT Efficiency **99.90%**

GENERAL DATA

Operating Temperature Range (°C) **-40~60°C, >45°C derating**

Cooling **Natural cooling**

Noise (dB) **<30 dB**

Communication with BMS **RS485; CAN**

Protection Degree **IP65**

Installation Style **Wall-mounted**

PV STRING INPUT DATA

Max. DC Input Power (W) **7800**

Rated PV Input Voltage (V) **370 (125~500)**

Start-up Voltage (V) **125**

MPPT Voltage Range (V) **150-425**

Full Load DC Voltage Range (V) **300-425**

PV Input Current (A) **13+13**

Max. PV ISC (A) **17+17**

No.of MPP Trackers **2**

No.of Strings per MPP Tracker **1**

AC OUTPUT DATA

Rated AC Output and UPS Power (W) **6000**

Max. AC Output Power (W) **6600**

AC Output Rated Current (A) **27.3/26.1**

Max. AC Current (A) **30/28.7**

Max. Continuous AC Passthrough (A) **40A**

Peak Power (off grid) **2 time of rated power, 10 S**

Power Factor **0.8 leading to 0.8 lagging**

Grid Type **Single Phase**

DC injection current (mA) **THD<3% (Linear load<1.5%)**

Output Frequency and Voltage **50/60Hz; L/N/PE 220/230Vac (single phase)**

BATTERY INPUT DATA

Battery Type **Lead-acid or Li-Ion**

Battery Voltage Range (V) **40~60**

Max. Charging Current (A) **135**

Max. Discharging Current (A) **135**

External Temperature Sensor **Yes**

Charging Curve **3 Stages / Equalization**

Charging Strategy for Li-Ion Battery **Self-adaption to BMS**

PROTECTION

Integrated **PV Input Lightning Protection, Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection**

Output Over Voltage Protection **DC Type II/AC Type III**

CERTIFICATIONS AND STANDARDS

Grid Regulation **VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150**

Safety EMC / Standard **IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2**

TIGER Neo

60HL4-(V)

475-500 Watt

MONO-FACIAL MODULE

N-type



N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPcon) technology offer lower LID/LeTID degradation and better low light performance.



Durability Against Extreme Environment

High salt mist and ammonia resistance.



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.




Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load



Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

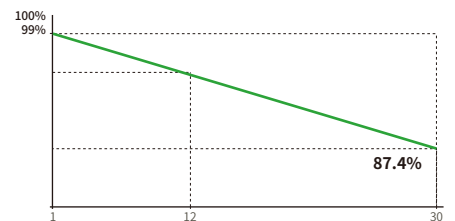

12 Year
Product Warranty

30 Year
Linear Power
Warranty

1%
First-year
Degradation

0.40%
Annual Degradation
Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



JKM475-500N-60HL4-(V)-F8-EN

60HL4-(V) 475-500 Watt

Mechanical Characteristics

Cell Type	N -type Mono-crystalline
No. of cells	120 (60×2)
Dimensions	1906×1134×30 mm
Weight	22.5 kg
Front Glass	3.2mm, Anti-reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M/MC4/Others
Output Cables	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

Packaging Configuration

Pallet Dimensions	1936×1140×1249 mm
Packing detail (Two pallets=One stack)	37 pcs/pallets, 74 pcs/stack, 888 pcs/ 40'HQ Container

Specifications (STC)


Maximum Power – Pmax [Wp]	475	480	485	490	495	500
Maximum Power Voltage – Vmp [V]	35.88	36.06	36.25	36.43	36.62	36.79
Maximum Power Current – Imp [A]	13.24	13.31	13.38	13.45	13.52	13.59
Open-circuit Voltage – Voc [V]	43.45	43.60	43.76	43.91	44.07	44.21
Short-circuit Current – Isc [A]	13.77	13.85	13.93	14.01	14.09	14.17
Module Efficiency STC [%]	21.98	22.21	22.44	22.67	22.90	23.17
Power Tolerance	0 ~ + 3 %					
Temperature Coefficients of Pmax	-0.29 %/°C					
Temperature Coefficients of Voc	-0.25 %/°C					
Temperature Coefficients of Isc	0.045 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions



Operating Temperature	-40 °C ~ +70°C
Maximum System Voltage	1000/1500 VDC (IEC)
Maximum Series fuse Rating	25 A

Engineering Drawings

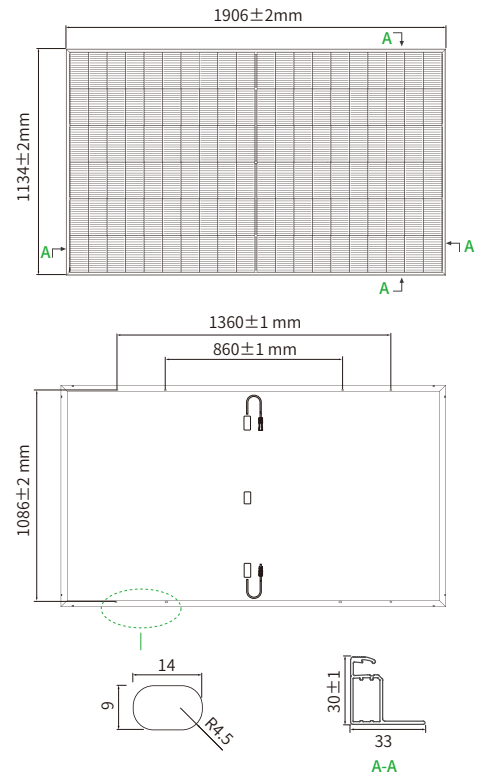

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

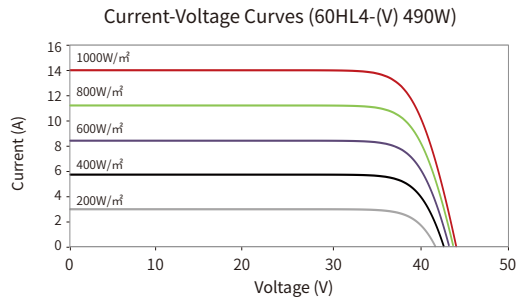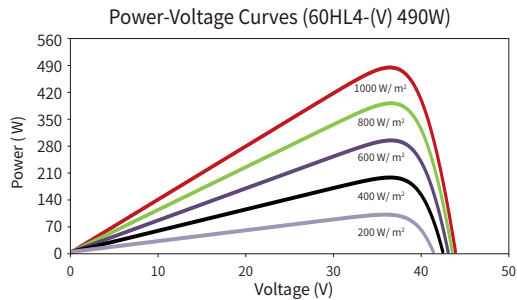



Meaningful Innovation.

9.60kWh

Rack Mounting Lithium Battery

05 YEAR
WARRANTY

TELECOM LITHIUM
BATTERY



V-TAC.EU



VTACEXPORTS.COM



CE RoHS

LISTING DETAILS

Model No: **VT-48200B**

SKU Code: **11523**

EAN Code: **3800157693578**

MASTER BOX PACKAGING

Qty Per Pallet: **14pcs per pallet**

Net Weight : **Approx. 81kg**

Product Size : **445*244*500mm**

GENERAL DATA

Nominal Capacity **200Ah@0.2C, 25°C**

Nominal Voltage **48.0V**

Rated Charge Voltage **54.0V**

Max Continuous Charge Current **100A@25°C**

Discharge Cut-off Voltage **40.5V**

Max Continuous Discharge Current **100A@25°C**

Temperature Range of Charge **0°C- 60°C**

Temperature Range of Discharge **-20°C- 60v**

Allowed Humidity Range **≤95%RH approx.**

IP **IP 20**

CONSTANT CURRENT DISCHARGE DATA / 25°C


Current/A End voltage/V	0.1C	0.2C	0.3C	0.4C	0.5C
	Hours				
45.0V	9.77	4.78	3.20	2.33	1.82
43.5 V	9.89	4.88	3.28	2.43	1.93
42.0V	10.01	5.00	3.35	2.46	1.98
40.5 V	10.06	5.06	3.40	2.54	2.00

CONSTANT POWER DISCHARGE DATA / 25°C

Power/W End voltage/V	960	1920	2880	3840	4400
	Hours				
45.0V	9.75	4.76	3.18	2.31	1.80
43.5 V	9.87	4.85	3.25	2.40	1.90
42.0V	10.02	4.96	3.31	2.47	1.94
40.5 V	10.08	5.11	3.36	2.50	1.96

- High quality LFP cells
- High rate charge / discharge current @ 100A
- High efficiency between charge and discharge
- Multiple protection methods based on patented
- BMS Intelligent anti-theft solution, LCD(optional)
- Modbus/CAN/SNMP V2/SNMP V3 (optional)

TECHNICAL CURVES

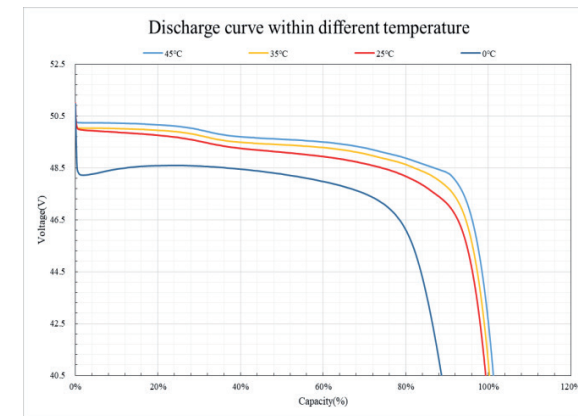

DRAWING

