3DTruder: AUGER-FED FILAMENT EXTRUSION LINE, ASSEMBLED SIDE VIEW

schematic, NOT to scale. Material flows left to right. Source: README.md, amazon_parts_list.md, master manual.

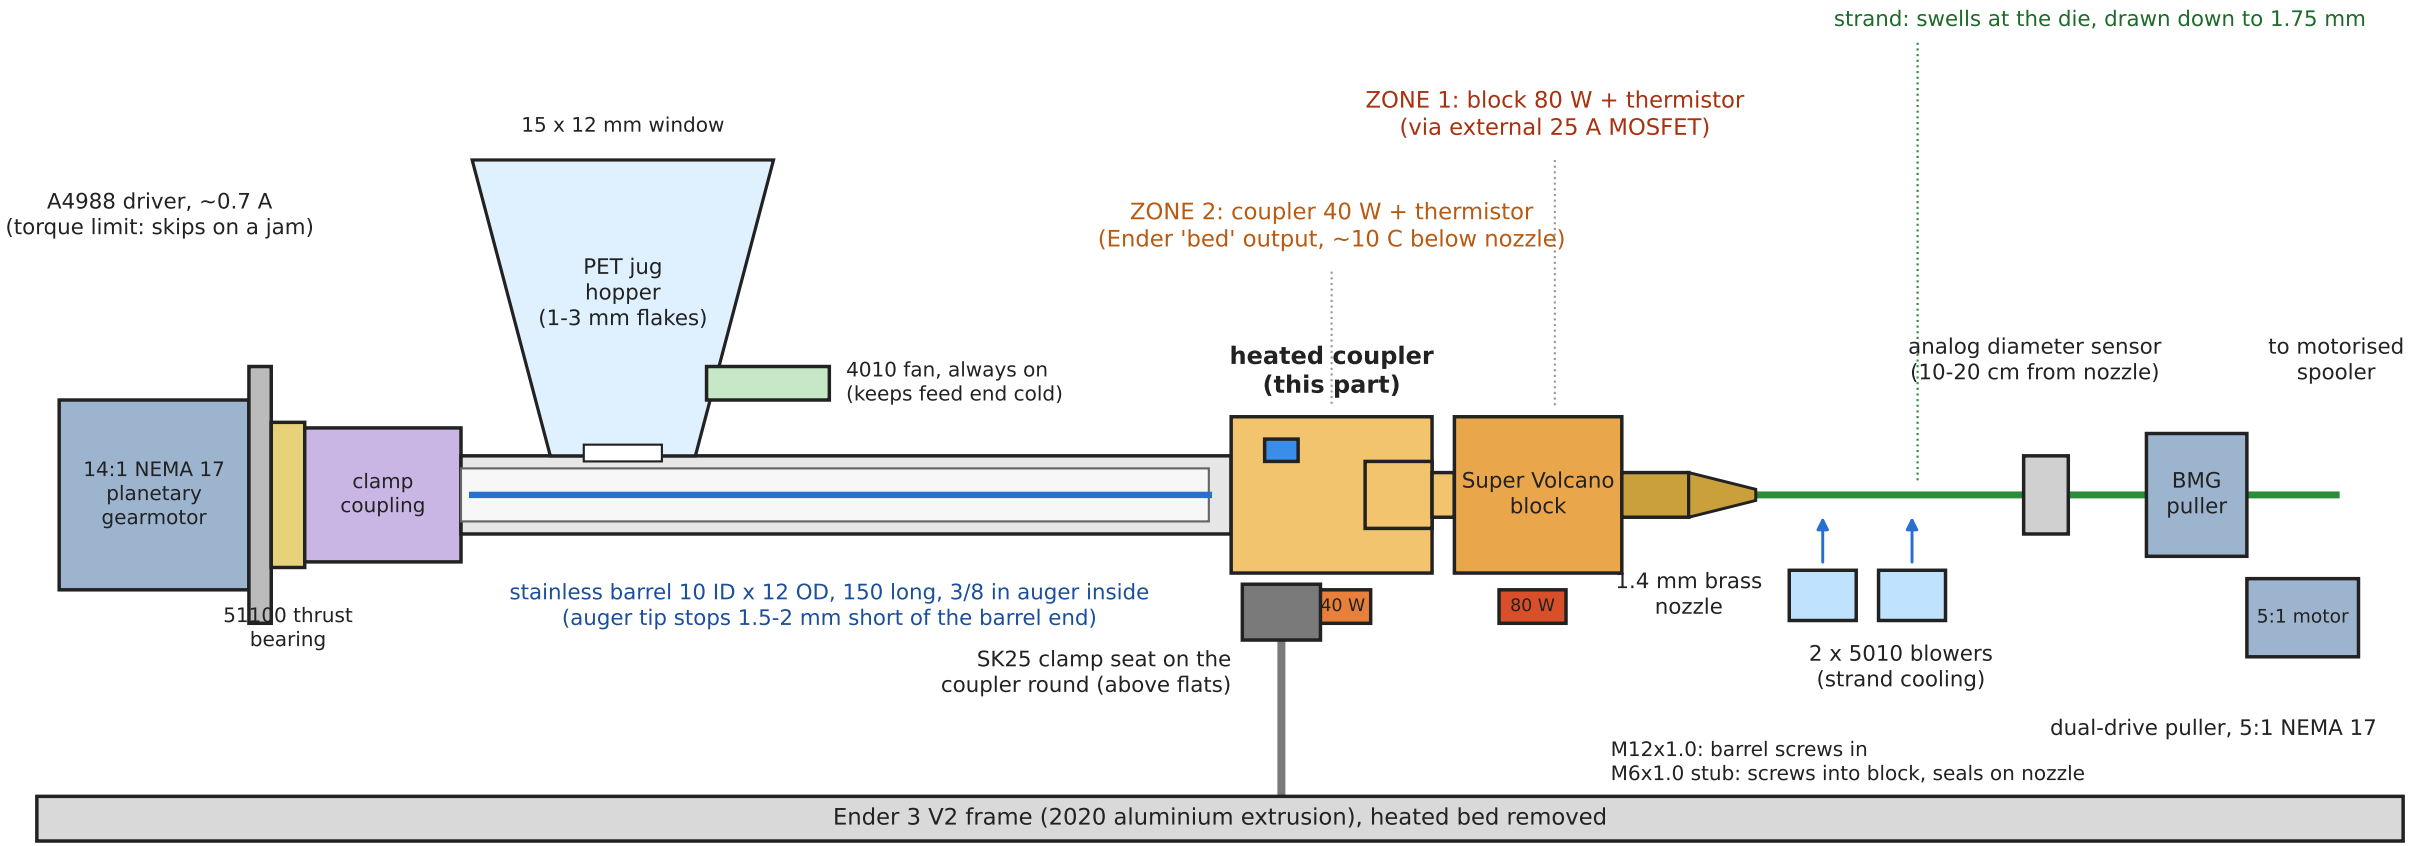

Arduino Uno + CNC Shield V3 (auger + puller control, diameter loop)	Ender 24 V 350 W PSU + 25 A MOSFET + fuse	Ender 3 V2 mainboard + DWIN screen (2 heat zones, 290 C), in the Ender base

Closed loop: Arduino reads the diameter sensor and adjusts puller speed. Auger only starts after the 10 minute melt soak (MELT READY).