NOTES (UNITS: mm)

1. MATERIAL: 316L STAINLESS STEEL, METAL 3D PRINTED (SLM). NO ALUMINIUM (280 °C SERVICE).
2. GENERAL TOLERANCE ±0.1 UNLESS NOTED. BREAK SHARP EDGES 0.3-0.5.
3. BORE MUST NOT BREAK INTO EITHER CROSS HOLE (2.0 MIN WALL TO HEATER HOLE). MIN WALL ELSEWHERE 1.39 (STUB).
4. CONCENTRICITY M12 BORE TO M6 STUB: 0.05 TIR.
5. DEBURR BORE BOTH ENDS. CUSTOMER SUPPLIES M12x1.0 TAP IF NEEDED.
6. HEATER HOLE & THERMISTOR HOLE PARALLEL, PERP. TO AXIS, OPPOSITE SIDES OF AXIS.
7. ALL THREADS (M6, M12, 2x M3) ARE MODELLED IN barrel_coupler.step; ISO 60° PROFILE.
8. 0.3 x 45° CHAMFER ON HEATER AND THERMISTOR HOLE ENTRIES.
9. PRINT ORIENTATION: AXIS VERTICAL, TOP (M12) FACE ON PLATE, STUB UP. CROSS HOLES HAVE 45° TEARDROP ROOFS; M12 HOLE FLOOR IS A 90° CONE.
10. PRINT TO FINISHED SIZE, AS MODELLED.
11. INSPECT: M6x1.0 NUT RUNS FULL STUB LENGTH; CLEAR SIGHT LINE THROUGH BORE.

VIEW B (TOP) SCALE 3:1

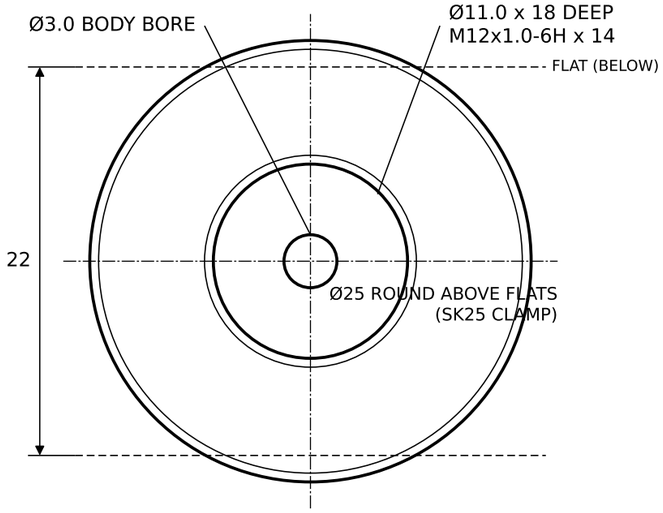

SECTION A-A
SCALE 3:1

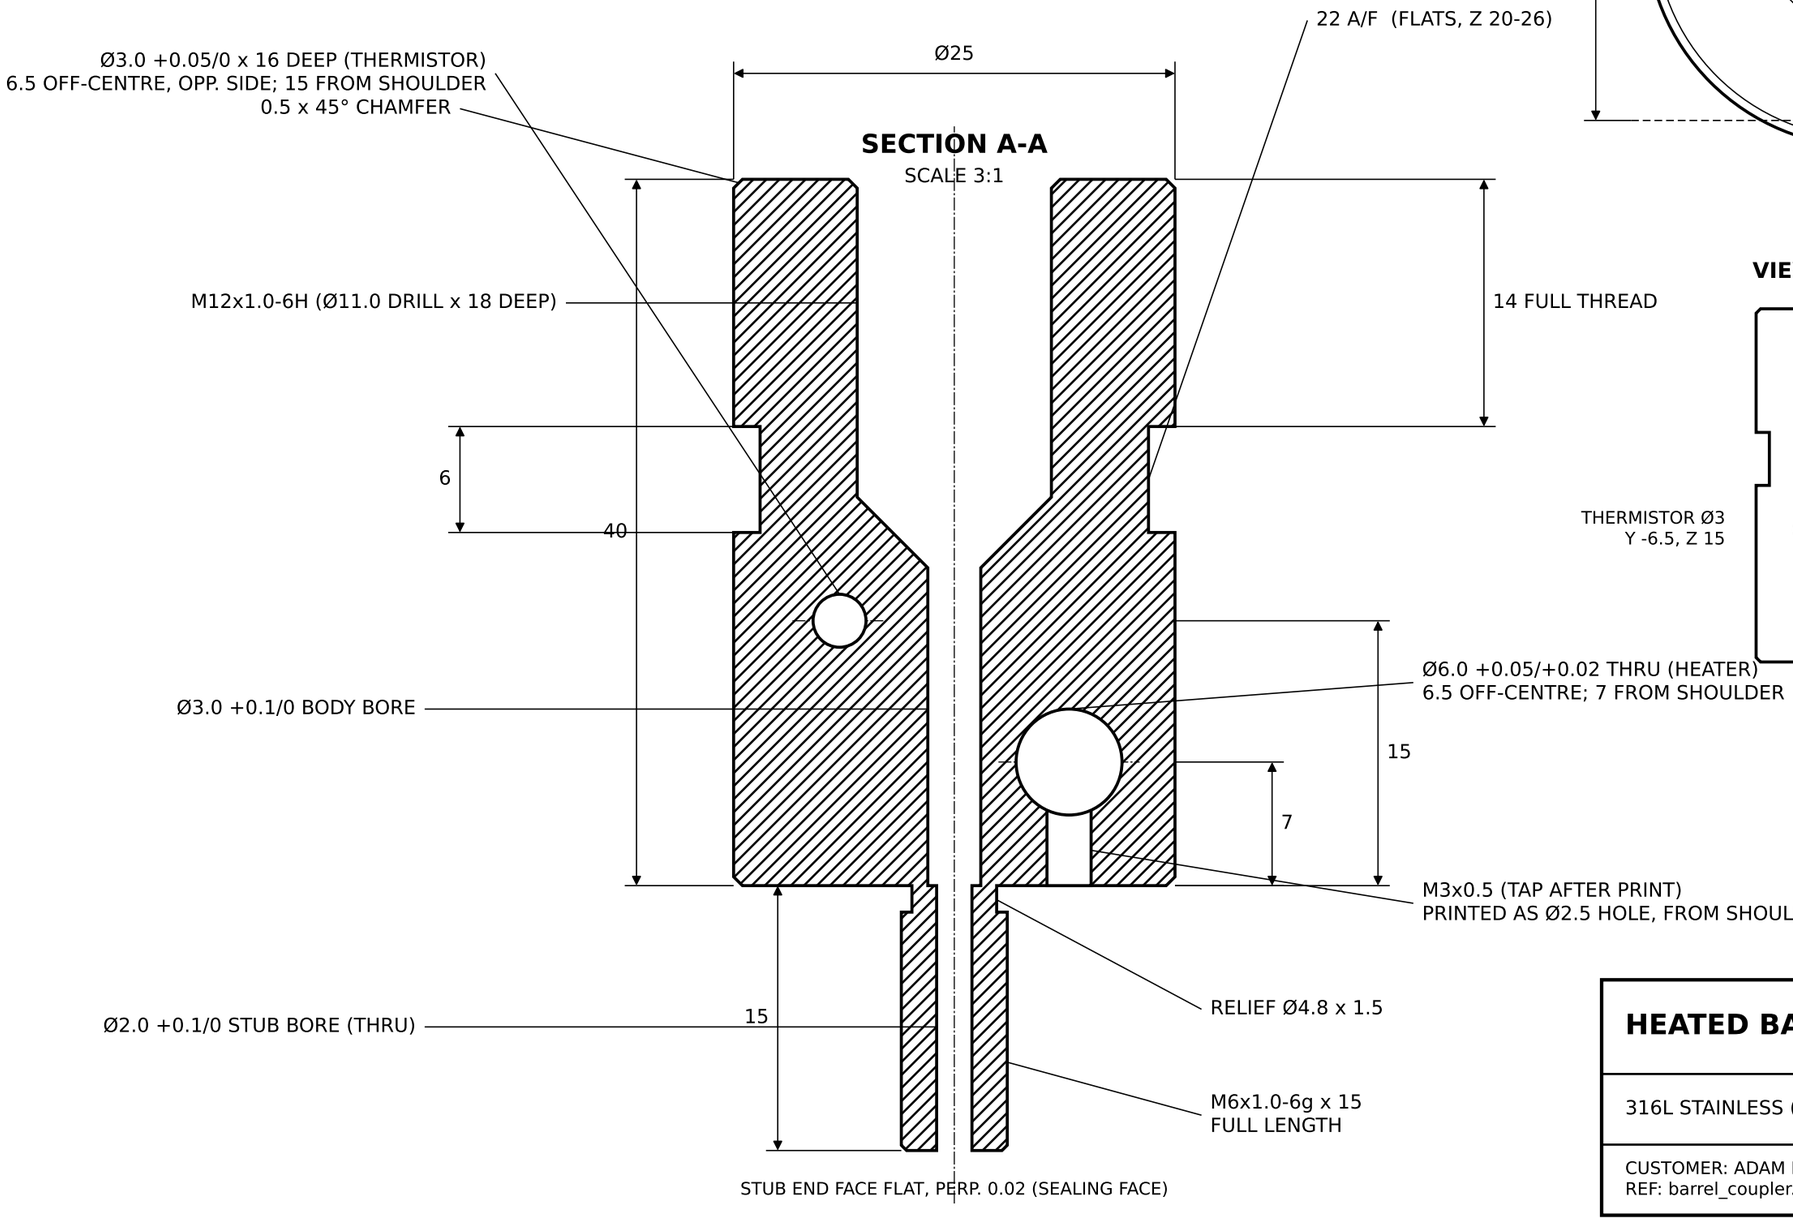

VIEW C (FROM +X)
(SCALE 1.5:1)

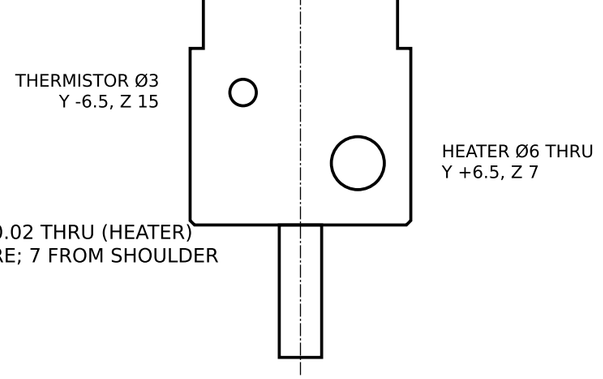

HEATED BARREL COUPLER

316L STAINLESS (SLM) mm QTY 1

CUSTOMER: ADAM HUMPHRIES REF: barrel_coupler.step	DWG: BC-001 REV A SCALE: AS NOTED SHEET 1/1