

Visit our ads partners or advertise (<https://www.ecalc.ch/advertising.htm>) on eCalc



(<https://www.leomotiondrives.com?ecalc>)
([index.htm](https://www.leomotiondrives.com/index.htm))

eCalc - xcopterCalc - easy

Demo-Version (beta version) - Sign-up now... ([calcmember/signup.php](https://www.ecalc.ch/calcmember/signup.php))

Language: english ▼

General

Field Elevation:

m.ASL

Air Temperature:

°C

Multicopter

of Rotors:

flat




Model Weight:

g

Frame Size:

mm



Battery Cell

Type (Cont. / max. C) - charge state:

LiPo 10000mAh - 45/60C



full



Configuration:

S

P

max. discharge:

85%



Controller

Type

max 90A



Motor



Manufacturer - Type (Kv)

(Weight: 109 g)

SunnySky



X2814-1400 V3 (1400) 

(² = discontinued)

Cooling:

good 

Gear Ratio:

1

: 1

Propeller

Type - yoke twist:

Generic - wide 0° 

Diameter:

10

inch

Pitch:

4.7


inch

Blades:


2

 calculate share


Remarks:



Hover Flight Time:



electric Power:



est. Temperature:



Thrust-Weight:

Battery

Load:	23.86 C
Voltage:	10.69 V
Rated Voltage:	11.10 V
Energy:	111 Wh
Total Capacity:	10000 mAh
Used Capacity:	8500 mAh
Hover Flight Time:	21.6 min

Motor @ Maximum

Current:	59.66 A
Voltage:	10.51 V
Revolutions*:	13476 rpm
electric Power:	627.2 W
est. Temperature:	16 °C
	61 °F
Thrust-Weight:	4.4 : 1


Wattmeter readings

Current:	238.64 A
Voltage:	10.69 V
Power:	2551.1 W

Motor @ Hover

Current:	5.91 A
Voltage:	11.64 V
Revolutions*:	5701 rpm
Throttle (log):	21 %
Throttle (linear):	37 %
electric Power:	68.8 W
est. Temperature:	-7 °C
	19 °F
specific Thrust:	7.27 g/W
	0.26 oz/W

Range Estimator

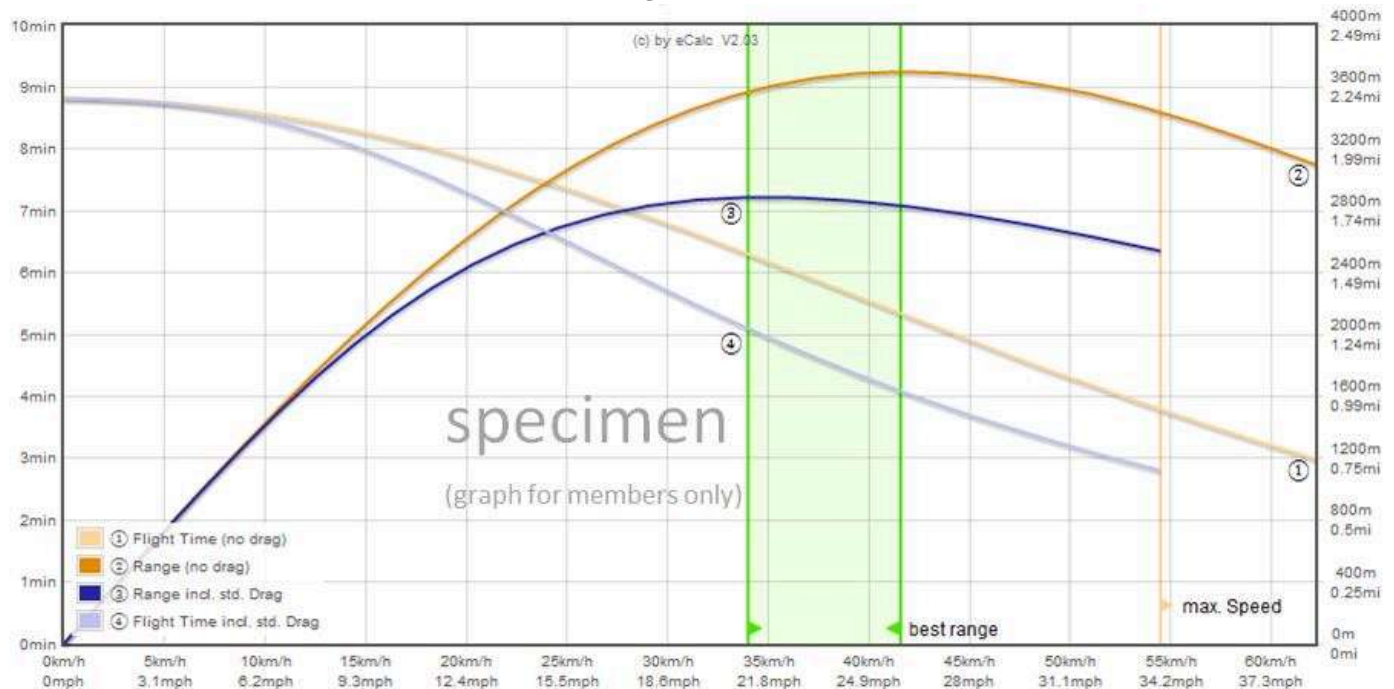

(c) copyright by and intellectual property of Markus Mueller, Solution for All, www.s4a.ch, [info\[at\]jecalc.ch](mailto:info[at]jecalc.ch)

See HTML Source for full and complete copyright notice.

Version: X7.41.000, 5.2.2026 / Data: 20.1.2026 with 14695 Motors

translated to english by Markus Mueller

15338360

*** **