

Visit our ads partners or advertise (<https://www.ecalc.ch/advertising.htm>) on eCalc



(<https://www.scorpionsystem.com/?ecalc>)
([/index.htm](https://www.scorpionsystem.com/?ecalc))

eCalc - xcopterCalc - easy

Demo-Version (beta version) - Sign-up now... ([calcmember/signup.php](https://www.ecalc.ch/calcmember/signup.php))

Language: english ▼

General

Field Elevation:

m.ASL

Air Temperature:

°C

Multicopter

of Rotors:

flat




Model Weight:

g

Frame Size:

mm



Battery Cell

Type (Cont. / max. C) - charge state:

LiPo 10000mAh - 20/30C



full



Configuration:

S

P

max. discharge:



Controller

Type

max 70A



Motor



Manufacturer - Type (Kv)

(Weight: 109 g)

SunnySky



X2814-900 V3 (900) 

(² = discontinued)

Cooling:

good 

Gear Ratio:

1

: 1

Propeller

Type - yoke twist:

Generic - wide 0° 

Diameter:

9

inch

Pitch:

4.5

inch

Blades:

2

 calculate share


Remarks:




Hover Flight Time:



electric Power:



est. Temperature:



Thrust-Weight:

Battery

Load:

8.88 C

Voltage:

14.87 V

Rated Voltage:

14.80 V

Energy:

148 Wh

Total Capacity:

10000 mAh

Used Capacity:

8500 mAh

Hover Flight Time:

25.7 min

Motor @ Maximum

Current:	22.20 A
Voltage:	14.78 V
Revolutions*:	12676 rpm
electric Power:	328.2 W
est. Temperature:	4 °C
	39 °F
Thrust-Weight:	2.7 : 1


Wattmeter readings

Current:	88.8 A
Voltage:	14.87 V
Power:	1320.5 W

Motor @ Hover

Current:	4.96 A
Voltage:	15.49 V
Revolutions*:	6887 rpm
Throttle (log):	35 %
Throttle (linear):	51 %
electric Power:	76.7 W
est. Temperature:	-6 °C
	21 °F
specific Thrust:	6.52 g/W
	0.23 oz/W

Range Estimator

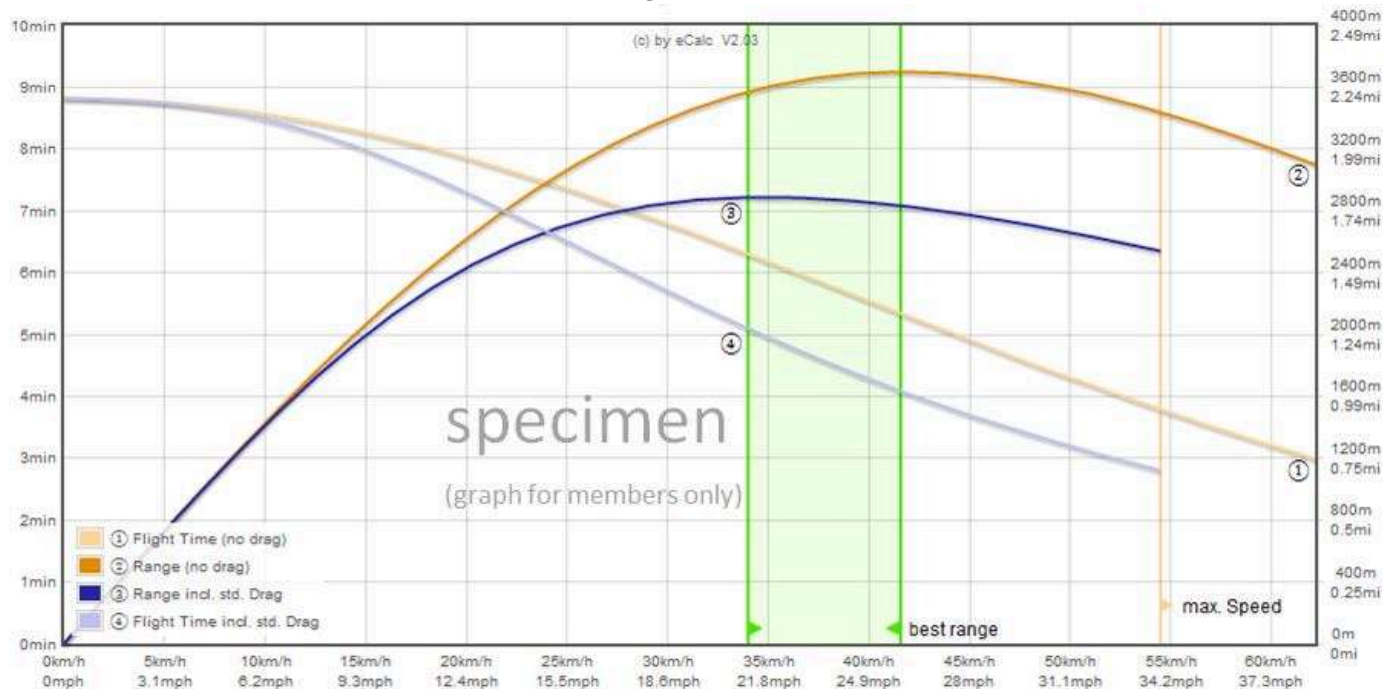

(c) copyright by and intellectual property of Markus Mueller, Solution for All, www.s4a.ch, [info\[at\]jecalc.ch](mailto:info[at]jecalc.ch)

See HTML Source for full and complete copyright notice.

Version: X7.41.000, 5.2.2026 / Data: 20.1.2026 with 14695 Motors

translated to english by Markus Mueller

15345325

*** **