

Visit our ads partners or advertise (<https://www.ecalc.ch/advertising.htm>) on eCalc
(<https://www.ecalc.ch/advertising.htm?ecalc>)

(/index.htm)

eCalc - xcopterCalc - easy

Demo-Version (beta version) - Sign-up now... (calcmember/signup.php)

Language: english ▼

General

Field Elevation:

m.ASL


Air Temperature:

°C

Multicopter

of Rotors:

flat



Model Weight:

g

Frame Size:

mm

Battery Cell

Type (Cont. / max. C) - charge state:

LiPo 10000mAh - 20/30C



full



Configuration:

S

P

max. discharge:



Controller

Type

max 60A



Motor



Manufacturer - Type (Kv)

(Weight: 109 g)

SunnySky



X2814-900 V3 (900)



(² = discontinued)

Cooling:

good



Gear Ratio:

1

: 1

Propeller

Type - yoke twist:

Generic - wide



0°



Diameter:

10

inch

Pitch:

4.7

inch

Blades:

2

calculate

share


Remarks:



Hover Flight Time:



electric Power:



est. Temperature:



Thrust-Weight:

Battery

Load:

4.06 C

Voltage:

11.49 V

Rated Voltage:

11.10 V

Energy:

222 Wh

Total Capacity:

20000 mAh

Used Capacity:

17000 mAh

Hover Flight Time:

43.4 min

Motor @ Maximum

Current:	20.31 A
Voltage:	11.39 V
Revolutions*:	9680 rpm
electric Power:	231.5 W
est. Temperature:	-1 °C
	30 °F
Thrust-Weight:	2.3 : 1


Wattmeter readings

Current:	81.24 A
Voltage:	11.49 V
Power:	933.4 W

Motor @ Hover

Current:	5.87 A
Voltage:	11.66 V
Revolutions*:	5694 rpm
Throttle (log):	40 %
Throttle (linear):	57 %
electric Power:	68.4 W
est. Temperature:	-7 °C
	19 °F
specific Thrust:	7.31 g/W
	0.26 oz/W

Range Estimator

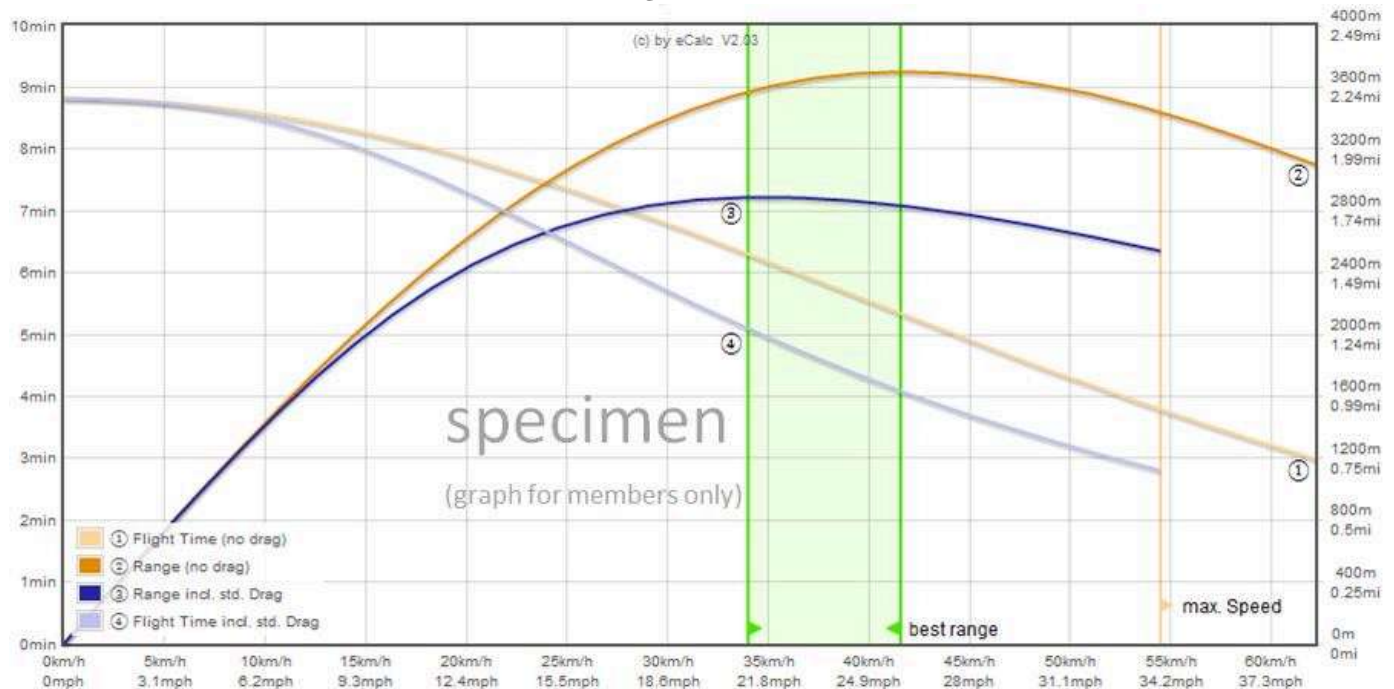

(c) copyright by and intellectual property of Markus Mueller, Solution for All, www.s4a.ch, [info\[at\]jecalc.ch](mailto:info[at]jecalc.ch)

See HTML Source for full and complete copyright notice.

Version: X7.41.000, 5.2.2026 / Data: 20.1.2026 with 14695 Motors

translated to english by Markus Mueller

15345325

*** **