




Pinout view



System view

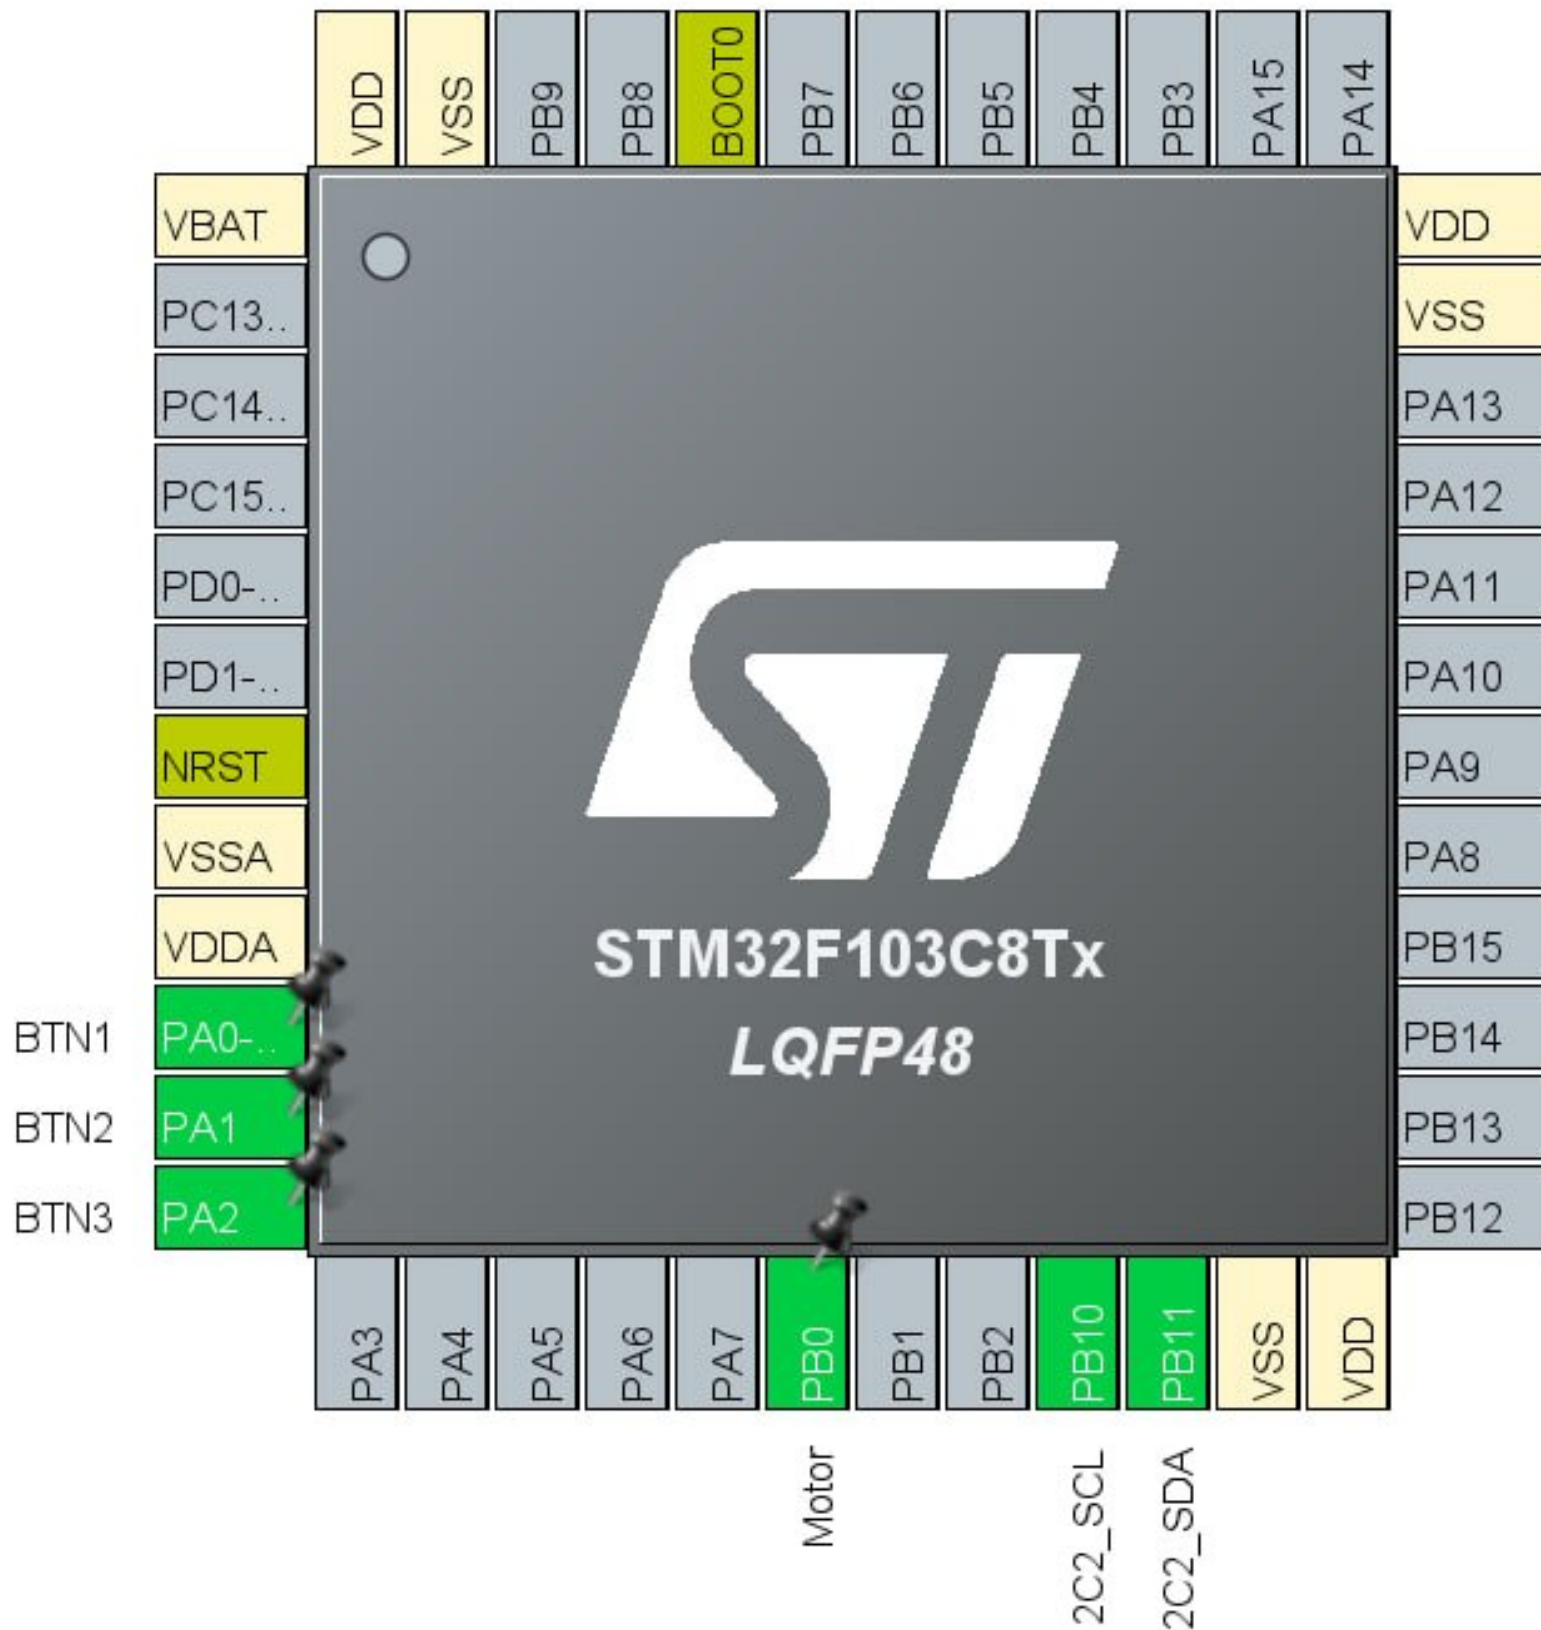

GPIO I2C

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output le...	GPIO mode	GPIO Pull-up/P...	Maximum outp...	User Label	Modified
PA0-WKUP	n/a	n/a	Input mode	Pull-down	n/a	BTN1	✓
PA1	n/a	n/a	Input mode	Pull-up	n/a	BTN2	✓
PA2	n/a	n/a	Input mode	Pull-up	n/a	BTN3	✓
PB0	n/a	Low	Output Push Pull	No pull-up and ...	Low	Motor	✓

I2C2 Mode and Configuration

Mode

I2C I2C



Configuration

Reset Configuration



Parameter Settings



User Constants



NVIC Settings



DMA Settings



GPIO Settings

Configure the below parameters :



Search (Ctrl+F)



Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Primary slave address

0

General Call address detection

Disabled

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

☐ XOR activation

☐ One Pulse Mode

Configuration

[Reset Configuration](#)[Parameter Settings](#) [User Constants](#) [NVIC Settings](#) [DMA Settings](#)

Configure the below parameters :



Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload Register - 16 bits value) 499

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

NVIC Mode and Configuration

Configuration

✔ NVIC

✔ Code generation

 Priority Group
☐ Sort by Preemption Priority and Sub Priority
 ☐ Sort by interrupts names

 Search

 Show
☒ Force DMA channels Interrupts

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☐	0	0
I2C2 error interrupt	☐	0	0

