

# Future Evolution of CSMA Protocols for the IEEE 802.11 Standard

Luis Sanabria-Russo, Azadeh Faridi, Boris Bellalta, Jaume Barcelo, Miquel Oliver  
Universitat Pompeu Fabra  
Roc Boronat 183, 08018 Barcelona  
Email: {name.surname@upf.edu}

**Abstract**—In this paper a candidate protocol to replace the prevalent CSMA/CA medium access control in Wireless Local Area Networks is presented. The proposed protocol can achieve higher throughput than CSMA/CA, while maintaining fairness, and without additional implementation complexity. Under certain circumstances, it is able to reach and maintain collision-free operation, even when the number of contenders is variable and potentially large. It is backward compatible, allowing for new and legacy stations to coexist without degrading one another's performance, a property that can make the adoption process by future versions of the standard smooth and inexpensive.

## I. INTRODUCTION

Since the popularization of the IEEE 802.11 standard, several works (e.g., [1]–[11]) have proposed modifications to CSMA/CA (Carrier Sense Multiple Access with Collision Avoidance), the contention protocol used in the standard for controlling the access to the shared medium. Despite the throughput improvement offered by all these works, none of the proposed modifications have yet been adopted by the standard.

A suitable candidate for the replacement of CSMA/CA, should

- provide performance advantages in terms of throughput and/or short-term fairness;
- be backward compatible with the current implementation;
- support a large number of simultaneous contenders; and
- be a simple evolution, in terms of implementation, to ease the transition and reduce the time to market (optional but desirable).

The aforementioned works can be categorized in three groups regarding the approach they use. In this paper, we will focus on the last of these three groups, proposing an additional enhancement to make it more adaptable to network size variations, and make the case for its adoption by the future versions of the standard.

In the first group, represented here by [1], [2], a throughput increase is obtained in saturation conditions by preventing the contention window from resetting to its minimum value after each successful transmission. However this performance gain comes at the expense of reduced short-term fairness, since nodes that have recently gone through a sequence of consecutive collisions are forced to stay at a higher backoff stage and thus are further penalized by less frequent transmissions.

In the second group of works, exemplified here by [3], [4], an accurate estimate of the number of contenders is used to

adjust the contention parameters. This approach offers some throughput and fairness gains, but at the expense of increased implementation complexity. In addition, as the number of contenders is estimated relying on the number of collisions, the presence of channel errors renders the estimation inaccurate. Furthermore, there is a fundamental trade-off between the stability and the speed of reaction of the estimation.

When it comes to backward compatibility, neither of the aforementioned solutions are able to fairly share the medium with legacy devices. In fact, these proposals are, generally speaking, less aggressive than the currently implemented CSMA/CA protocol. Consequently, in a hypothetical mixed network in which the new and old protocols coexisted, the new stations would receive a smaller share of the available bandwidth.

A more important limitation of the two approaches exposed so far is that the throughput is bounded by that of CSMA/CA with optimal configuration [3], [12].

The third group of solutions, which is the focus of the current paper, can deliver a throughput above the maximum attainable by CSMA/CA. This performance boost is achieved mainly by the use of deterministic backoff after successful transmissions, which reduces the chances of collisions for nodes that were successful in their previous transmission. Furthermore, under certain conditions, a collision-free operation can be reached. We will refer hereafter to the class of algorithms that use deterministic backoffs after successful transmissions as CSMA with Enhanced Collision Avoidance (CSMA/ECA). This approach was first introduced in [5], and later a more detailed analysis for both saturated and non-saturated conditions was presented in [6]. A more in-depth study is carried out in [7], including realistic elements such as the possibility of Clear Channel Assessment errors. Different aspects of fairness are addressed in [7]–[9]. The performance in realistic channels, taking into account the Auto Rate Fallback mechanism, is evaluated in [13], [14].

Quality-of-service and traffic differentiation in CSMA/ECA has been discussed in [7], [15]. The performance of CSMA/ECA in the presence of channel errors is considered in [7]–[9], [16]. Other aspects such as coexistence with legacy stations and performance in the presence of new entrants have also been covered in [7]–[9]. Results for the impact of slot drift (non-ideal clocks) in protocols similar to CSMA/ECA can be found in [17]. In the present workshop paper, we focus

on a simple greenfield scenario with a single traffic class, ideal channel, ideal clocks, and saturation conditions. We are currently evaluating more complex scenarios that we outline in Section IV

Even though initial research efforts were focused on the WLAN collision problem, more recent works try to extend the idea to multi-hop networks. In [10], the multi-hop slotted case is explored. A solution that does not require network-wide slot synchronization is studied in [18].

The same principles that we exploit to prevent collisions in WLANs can be used in other areas of radio resource management in wireless area networks [19]–[22].

In all the previous work on collision-free operation in WLANs mentioned so far, there is the limitation that the number of contenders should not exceed the value of the deterministic backoff used after successful transmissions. If this value is exceeded, it is no longer possible to achieve collision-free operation. A first solution to solve this problem is presented in [11], but it requires the presence of a central entity (typically the access point) that instructs the other nodes to adjust the value of their deterministic backoff.

In the current paper, we present a completely distributed solution, called *backoff stage hysteresis* or simply *hysteresis*, which is a simple modification to CSMA/ECA to accommodate a large number of contenders in an adaptive and distributed fashion. Hysteresis by itself, comes at the expense of reduction in long-term fairness. Using hysteresis together with what we will refer to as *fair-share* allows for reaching collision-free operation with self-adaptation to a variable, and potentially large, number of contenders while preserving fairness. The concept of fair-share was first introduced in [9]. We will furthermore detail pseudo-code algorithms for three different types of CSMA/ECA (basic, with hysteresis, and with both hysteresis and fair-share) and highlight how they can be easily implemented using simple modifications to the currently-used CSMA/CA algorithm. We will then present some performance evaluation, quantifying the performance gain that these three types of CSMA/ECA can achieve, both in terms of throughput and fairness.

Note that the coexistence and fairness of basic CSMA/ECA and CSMA/CA has been studied in [8]. The addition of hysteresis and fair-share to the basic CSMA/ECA may represent less frequent transmissions and more packets per transmission. These two modifications do not interfere in any way with the execution of the legacy protocol and, therefore, CSMA/CA with hysteresis and fair-share can also coexist with the currently deployed protocol.

## II. ENHANCED CSMA/CA

In this section and the next, we make the case for the suitability of CSMA/ECA with hysteresis and fair-share as a future replacement to the CSMA/CA protocol. To do this, we begin by presenting a simple pseudo-code which captures the essence of the CSMA/CA protocol as it is currently implemented in the IEEE 802.11 standard. We will then show how CSMA/ECA can be implemented by a minor modification

to the CSMA/CA algorithm. We then describe hysteresis and fair-share, by presenting minor modifications, one by one, to the CSMA/ECA algorithm. The final product—CSMA/ECA with hysteresis and fair-share—satisfies the four requirements specified in the introduction, which makes it a suitable candidate to replace CSMA/CA in the upcoming revisions of the standard. We would like to emphasize here that the basic CSMA/ECA and the concept of fair-share are not presented here for the first time, however, we include the algorithms corresponding to these protocols for both completeness and ease of comparison between protocols.

Algorithm 1 describes the CSMA/CA algorithm that is used in current networks. When a station joins the contention, it initializes the retry attempt counter  $r$  and the backoff stage  $s$  to zero. The backoff counter  $b$  is initialized using a uniform random distribution and the minimum contention window  $CW_{\min}$ . After each collision, the retry attempt counter and the backoff stage counter are incremented. As a consequence of the incremented backoff stage, a larger contention window is used. Note that there is a maximum backoff stage  $S$  and a maximum retry limit  $R$  specified by the protocol. When the number of transmission attempts on a packet reaches the maximum retry limit, the packet is discarded. Furthermore,  $r$  and  $s$  are reset to zero, and a new value for  $b$  is computed both when the retry limit is reached and when the transmission is successful. Note that the pseudo-code performs the same action in lines 18 and 21. Therefore, the algorithm could have been further simplified if instead this action were moved to immediately after line 16. However, the current presentation of the algorithm eases the comparison between the CSMA/CA and the enhancements that follow.

There are three changes in the CSMA/ECA with hysteresis and fair-share compared to the legacy CSMA/CA protocol. Firstly, a deterministic backoff is used after successful transmissions. This simple modification converts CSMA/CA into CSMA/ECA. Secondly, the backoff stage is not reset after a packet is serviced. The backoff stage is reset only when the station leaves the contention because it has no packet to be transmitted. This modification is what we have been referring to as hysteresis. And thirdly, the number of packets transmitted in every transmission attempt is chosen as a function of the backoff stage, which is what we call fair-share. Note that current standards already support the transmission of multiple packets in a single slot.

Algorithm 2 describes the basic CSMA/ECA in which a deterministic backoff is used after successful transmissions. The only change with respect to CSMA/CA is in fact in line 18, where the random assignment of  $b$  in CSMA/CA is replaced by a deterministic assignment in CSMA/ECA. Note that at this point the value of  $s$  is zero, and therefore the assigned deterministic value is in fact  $b = CW_{\min}/2$ . This value is roughly equal to the expectation of the backoff chosen in line 18 in Algorithm 1. This particular choice guarantees fairness between new stations and legacy stations.

Hysteresis is included in Algorithm 3. Adding hysteresis is as simple as removing line 16 from Algorithm 2. This

means that the deterministic backoff value chosen after a successful transmission in this case is half the length of the contention window of the backoff stage in which the successful transmission has occurred. In fact, the backoff stage is reset only when the node has no packet to serve. This allows for the use of larger deterministic backoff values, which means that the network can reach a collision-free operation for a higher number of nodes. Since in the collision-free operation, some nodes may have higher backoff values than others, this protocol does not share the medium in a fair manner among nodes.

Finally, fair-share is implemented in Algorithm 4 by simply modifying line 9 of Algorithm 3 to increase the number of transmitted packets from one to  $2^s$ . This way, at each transmission opportunity in collision-free operation, each node transmits a number of packets proportional to the length of its deterministic backoff. Therefore, nodes that have to wait longer between transmission opportunities get to transmit more packets, hence fairness is preserved.

```

1 while the device is on do
2    $r \leftarrow 0$  ;  $s \leftarrow 0$  ;
3    $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
4   while there is a packet to transmit do
5     repeat
6       while  $b > 0$  do
7         wait 1 slot ;
8          $b \leftarrow b - 1$  ;
9       Attempt transmission of 1 packet ;
10      if collision then
11         $r \leftarrow r + 1$  ;
12         $s \leftarrow \min(s + 1, S)$  ;
13         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
14      until ( $r = R$ ) or (success) ;
15       $r \leftarrow 0$  ;
16       $s \leftarrow 0$  ;
17      if success then
18         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$  ;
19      else
20        Discard packet;
21         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
22    Wait until there is a packet to transmit ;

```

**Algorithm 1:** CSMA/CA

An example of the operation of CSMA/ECA with hysteresis is presented in Fig. 1.

### III. PERFORMANCE EVALUATION

In this section, the performance of the different CSMA protocols is evaluated through simulations. The presented results show the saturation throughput and fairness (Jain's Fairness Index (JFI) [23]) when the number of contenders increases. Additionally, the evolution of the probabilities that

```

1 while the device is on do
2    $r \leftarrow 0$  ;  $s \leftarrow 0$  ;
3    $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
4   while there is a packet to transmit do
5     repeat
6       while  $b > 0$  do
7         wait 1 slot ;
8          $b \leftarrow b - 1$  ;
9       Attempt transmission of 1 packet ;
10      if collision then
11         $r \leftarrow r + 1$  ;
12         $s \leftarrow \min(s + 1, S)$  ;
13         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
14      until ( $r = R$ ) or (success) ;
15       $r \leftarrow 0$  ;
16       $s \leftarrow 0$  ;
17      if success then
18         $b \leftarrow (2^s CW_{\min})/2$  ;
19      else
20        Discard packet;
21         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
22    Wait until there is a packet to transmit ;

```

**Algorithm 2:** CSMA/ECA

```

1 while the device is on do
2    $r \leftarrow 0$  ;  $s \leftarrow 0$  ;
3    $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
4   while there is a packet to transmit do
5     repeat
6       while  $b > 0$  do
7         wait 1 slot ;
8          $b \leftarrow b - 1$  ;
9       Attempt transmission of 1 packet ;
10      if collision then
11         $r \leftarrow r + 1$  ;
12         $s \leftarrow \min(s + 1, S)$  ;
13         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
14      until ( $r = R$ ) or (success) ;
15       $r \leftarrow 0$  ;
16      if success then
17         $b \leftarrow (2^s CW_{\min})/2$  ;
18      else
19        Discard packet;
20         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
21    Wait until there is a packet to transmit ;

```

**Algorithm 3:** CSMA/ECA with hysteresis

one slot collision is plotted to provide further insights on the operation of each protocol, and specially whether the collision-

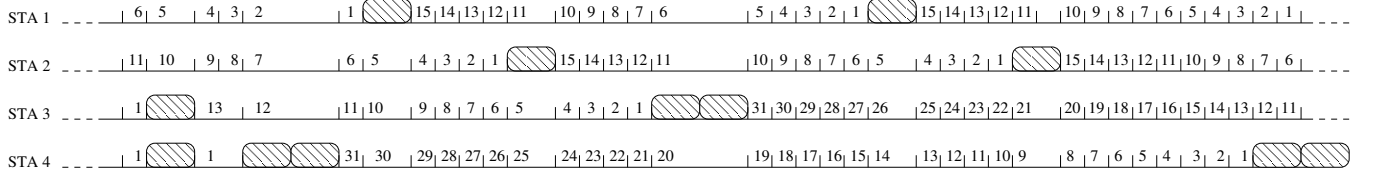


Fig. 1. Schedule length distributed adaption example. All the stations transmit the same number of packets in each cycle, despite using different schedule lengths.

```

1 while the device is on do
2    $r \leftarrow 0$  ;  $s \leftarrow 0$  ;
3    $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
4   while there is a packet to transmit do
5     repeat
6       while  $b > 0$  do
7         wait 1 slot ;
8          $b \leftarrow b - 1$  ;
9       Attempt transmission of  $2^s$  packets ;
10      if collision then
11         $r \leftarrow r + 1$  ;
12         $s \leftarrow \min(s + 1, S)$  ;
13         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
14      until ( $r = R$ ) or (success) ;
15       $r \leftarrow 0$  ;
16      if success then
17         $b \leftarrow (2^s CW_{\min})/2$  ;
18      else
19        Discard packet;
20         $b \leftarrow \mathcal{U}[0, 2^s CW_{\min} - 1]$ ;
21    Wait until there is a packet to transmit ;

```

Algorithm 4: CSMA/ECA with hysteresis and fair-share

free operation is reached.

To evaluate the four protocols, a network of  $N$  nodes is considered, where each node is within the coverage area of the others. The channel does not introduce errors and the nodes are set to be under saturation (always have packets to transmit). The number of contenders,  $N$ , ranges from 2 to 50, and one thousand instances of the simulation are performed for each  $N$ . All plotted results show the 95% confidence intervals.

A simulator of such scenario has been built, from scratch, using the C++ language and based on the COST (Component Oriented Simulation Toolkit) libraries [24]. The specific parameters of the IEEE 802.11n amendment [25] are considered, and listed in Table I. In case packets are aggregated, default A-MPDU aggregation is considered. Further MAC-related parameters, as well as the code for the four CSMA protocols, are available online [26].

In Figure 2, the throughput of all four schemes is plotted. As can be observed, the throughput for CSMA/CA decreases with the number of nodes, as the binary exponential backoff

Parameter	Value
$CW_{\min}$	16 slots
$S$	5 stages
Data Packet Length	12000 bits
Data Rate	65 Mbps

TABLE I  
PARAMETERS CONSIDERED FOR THE PERFORMANCE EVALUATION

reduces the number of transmission attempts to keep the collisions low. The basic CSMA/ECA is able to achieve the collision-free operation if the number of nodes is lower than the deterministic backoff value, i.e.,  $N \leq CW_{\min}/2$ . This is why in this figure, a phase transition is observed at  $N = 8$ . When  $N$  is larger than  $CW_{\min}/2 = 8$ , although the collision-free operation is not possible, the throughput obtained remains higher than in CSMA/CA. This is because, regardless of whether or not the collision-free operation is reached, in CSMA/ECA, a node always has a lower collision probability immediately after a successful transmission, without affecting the collision probability of other nodes.

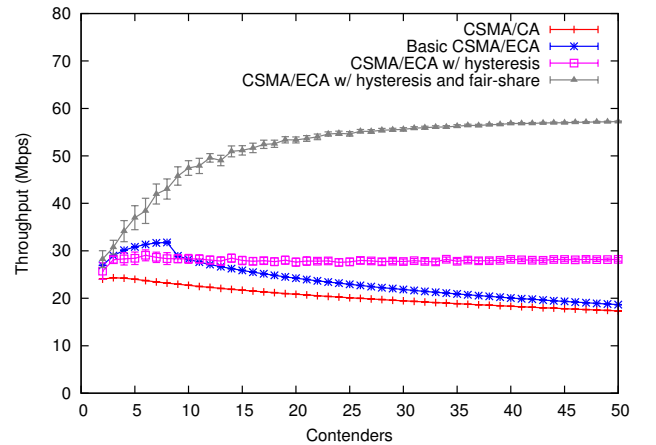


Fig. 2. Throughput

Clearly, reaching a collision-free operation is highly desirable, but not always possible in the basic CSMA/ECA. CSMA/ECA with Hysteresis exactly addresses this issue by simply not resetting the backoff stage after a successful transmission. In other words, the deterministic backoff value ( $2^s CW_{\min}/2$ ) is chosen based on the backoff stage,  $s$ , in which the transmission was successful. This way, a larger number of contenders can reach a collision-free operation (Figure 2), but



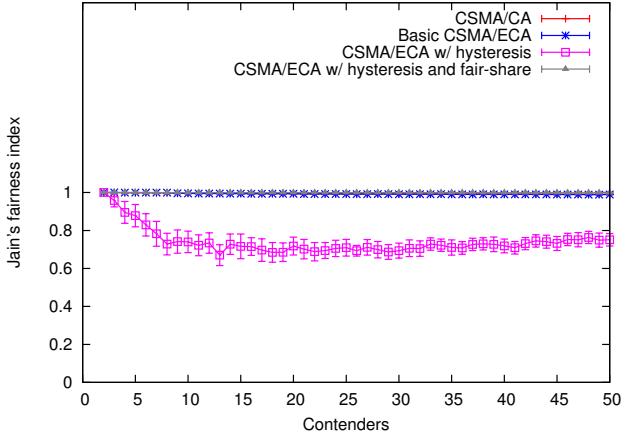


Fig. 3. Fairness

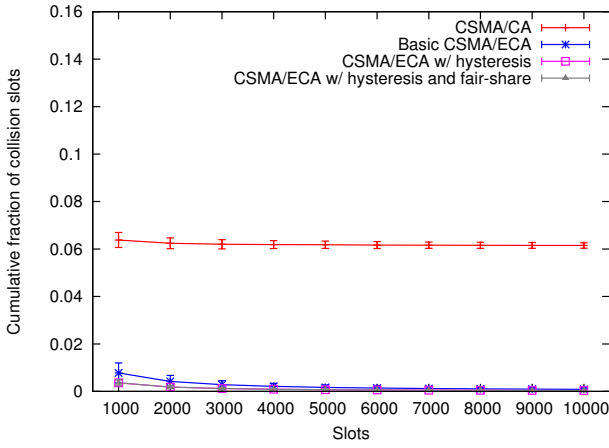


Fig. 4. Cumulative fraction of slots spent in collision for  $N = 6$  nodes

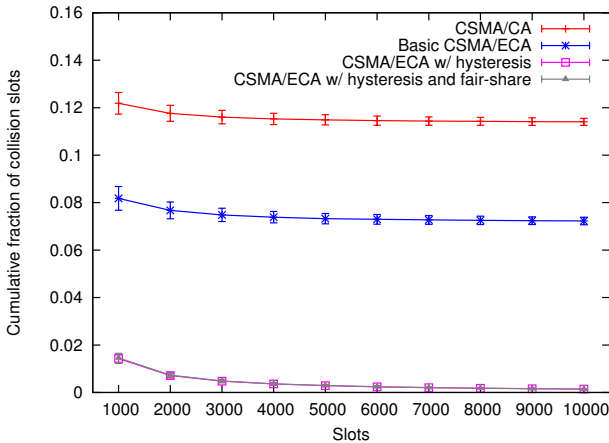


Fig. 5. Cumulative fraction of slots spent in collision for  $N = 12$  nodes

at the expense of a lower throughput for  $N \leq 8$  compared to the basic CSMA/ECA. This is because if collision-free operation can be reached with a lower deterministic backoff value, there will be fewer empty slots, hence higher channel access efficiency. Furthermore, CSMA/ECA with hysteresis has a lower long-term fairness (Figure 3) compared to the

basic CSMA/ECA or even the legacy CSMA/CA protocol, as once the network has reached the collision-free state, nodes that use a large backoff stage will have fewer transmission opportunities than others.

To address the aforementioned fairness issue when hysteresis is used, CSMA/ECA with hysteresis and fair-share was introduced. It achieves greater throughput than CSMA/ECA with hysteresis only, while being fair for any number of contenders. This is achieved by using packet aggregation, transmitting  $2^s$  packets per attempt. As observed in Figure 2, using aggregation we are not only able to provide a fair access, but also we are able to significantly increase the throughput. Note that the throughput increases with the number of nodes because for larger  $N$ , the collision-free operation is reached at higher backoff stages, which means more packets will be aggregated and transmitted at every attempt, thus improving the efficiency of the network.

In Figures 4 and 5, the evolution of the cumulative fraction of slots spent in collision is shown for  $N = 6$  and 12 nodes. As expected, for  $N = 6$ , with all CSMA/ECA variants, collision-free operation is achieved (since  $N < 8$ ) and the probability that a slot contains a collision tends rapidly to zero. The collision-free operation is reached faster when hysteresis is used. When  $N = 12$ , only the protocols using hysteresis reach collision-free operation.

#### IV. FUTURE WORK

In this workshop paper, we have evaluated the protocols under discussion in a very simple scenario using ideal channel, ideal clocks and saturation conditions. Furthermore, all the participating stations use the same protocol and have a single traffic class. The presented metrics include only throughput and fairness, whereas delay, jitter and packet have been omitted. Another scenario of interest that we have not included is the situation in which the stations join the contention to transmit a file and then they leave.

Our proposed protocol is based on CSMA/ECA, which works well in non-ideal conditions, and the results we are currently obtaining confirm that CSMA/ECA with hysteresis and fair-share inherits the flexibility and robustness of its predecessors.

Regarding the implementation in real prototypes, it has been proven difficult until now, as the IEEE 802.11 protocols are embedded in the network interfaces and it is not possible to reprogram them. There are current advances in that direction [27] but it is still difficult to set the backoff to a deterministic value after successful transmissions in available hardware.

Our intention is to try our protocols in a different technology, namely radio-frequency identification (RFID), where there is programmable hardware that can be used to implement arbitrary protocols. RFID uses also a contention protocol which is prone to collisions, and we believe it can be a first area in which we will be available to develop working prototypes to validate some of the ideas proposed in the present paper.

## V. CONCLUSION

In this paper we have described a suitable replacement of the prevalent CSMA/CA protocol used in the IEEE 802.11 standard. Compared to the CSMA/CA protocol, the proposed protocol, called CSMA/ECA with Hysteresis and Fair-Share, offers performance boost in terms of throughput while preserving long-term fairness. In fact, under certain conditions, collision-free operation can be reached in a distributed and adaptive manner, even as the number of nodes in the network increases. Furthermore, this protocol is backward compatible, and can operate with nodes using the legacy protocol without degrading the performance of the legacy nodes. All these properties make the proposed protocol a good candidate to replace CSMA/CA in the upcoming revisions of the standard.

## ACKNOWLEDGMENT

The authors would like to thank the anonymous reviewers for their corrections, helpful comments and suggestions for future work. The authors are also thankful to Alessandro Checchio for helping in the preparation of the related work section.

## REFERENCES

- [1] V. Bharghavan, A. Demers, S. Shenker, and L. Zhang, "MACAW: a media access protocol for wireless LAN's," in *ACM SIGCOMM Computer Communication Review*, vol. 24, no. 4. ACM, 1994, pp. 212–225.
- [2] C. Wang, B. Li, and L. Li, "A new collision resolution mechanism to enhance the performance of IEEE 802.11 DCF," *IEEE Transactions on Vehicular Technology*, vol. 53, no. 4, pp. 1235–1246, 2004.
- [3] F. Cali, M. Conti, E. Gregori, and P. Aleph, "Dynamic Tuning of the IEEE 802.11 Protocol to Achieve a Theoretical Throughput Limit," *IEEE/ACM Trans. Netw.*, vol. 8, no. 6, pp. 785–799, 2000.
- [4] A. Lopez-Toledo, T. Vercauteren, and X. Wang, "Adaptive Optimization of IEEE 802.11 DCF Based on Bayesian Estimation of the Number of Competing Terminals," *IEEE Trans. Mobile Comput.*, vol. 5, no. 9, p. 1283, 2006.
- [5] J. Barcelo, B. Bellalta, C. Cano, and M. Oliver, "Learning-BEB: Avoiding Collisions in WLAN," in *Eunice*, 2008.
- [6] J. Barcelo, B. Bellalta, A. Sfaïropoulou, C. Cano, and M. Oliver, "CSMA with Enhanced Collision Avoidance: a Performance Assessment," in *IEEE VTC Spring*, 2009.
- [7] Y. He, R. Yuan, J. Sun, and W. Gong, "Semi-Random Backoff: Towards Resource Reservation for Channel Access in Wireless LANs," in *IEEE ICNP*, 2009, pp. 21–30.
- [8] J. Barcelo, A. Lopez-Toledo, C. Cano, and M. Oliver, "Fairness and Convergence of CSMA with Enhanced Collision Avoidance," in *IEEE ICC*, 2010.
- [9] M. Fang, D. Malone, K. Duffy, and D. Leith, "Decentralised Learning MACs for Collision-free Access in WLANs," *Wireless Networks*, to appear. Preprint available in arXiv.
- [10] K. Hui, T. Li, D. Guo, and R. Berry, "Exploiting peer-to-peer state exchange for distributed medium access control," in *Information Theory Proceedings (ISIT), 2011 IEEE International Symposium on*. IEEE, 2011, pp. 2368–2372.
- [11] J. Barcelo, B. Bellalta, C. Cano, A. Sfaïropoulou, and M. Oliver, "Towards a Collision-Free WLAN: Dynamic Parameter Adjustment in CSMA/E2CA," in *EURASIP Journal on Wireless Communications and Networking*, 2011.
- [12] G. Bianchi, "Performance Analysis of the IEEE 802.11 Distributed Coordination Function," *IEEE J. Sel. Areas Commun.*, vol. 18, no. 3, pp. 535–547, 2000.
- [13] G. Martorell, F. Riera, G. Femenias, J. Barcelo, and B. Bellalta, "On the performance evaluation of CSMA/E2CA protocol with open loop ARF-based adaptive modulation and coding," in *European Wireless*, 2012.
- [14] G. Martorell, F. Riera-Palou, and G. Femenias, "Tuning Fast Link Adaptation Algorithms for CSMA/CA-and CSMA/E2CA-Based WLANs," in *ICCCN*. IEEE, 2012, pp. 1–7.
- [15] J. Barcelo, B. Bellalta, C. Cano, A. Sfaïropoulou, M. Oliver, and J. Zuidweg, "Traffic Prioritization for Carrier Sense Multiple Access with Enhanced Collision Avoidance," in *MACOM*, 2009.
- [16] J. Barcelo, N. Garcia, A. Faridi, S. Oechsner, and B. Bellalta, "Modelling a decentralized constraint satisfaction solver for collision-free channel access," *CoRR*, vol. abs/1210.3598, 2012.
- [17] W. Gong and D. Malone, "Addressing slot drift in decentralized collision free access schemes for w lans," *Multiple Access Communications*, pp. 146–157, 2012.
- [18] J. Barcelo, B. Bellalta, C. Cano, A. Sfaïropoulou, and M. Oliver, "On the Distributed Construction of a Collision-Free Schedule in Multi-Hop Packet Radio Networks," in *Telecommunication Systems*, to appear. Available in ArXiv.
- [19] K. R. Duffy, C. Bordenave, and D. J. Leith, "Decentralized Constraint Satisfaction," *CoRR*, vol. abs/1103.3240, 2011.
- [20] A. Checchio, R. Razavi, D. Leith, and H. Claussen, "Self-Configuration of Scrambling Codes for WCDMA Small Cell Networks," in *PIMRC*, 2012.
- [21] A. Checchio and D. Leith, "Learning-Based Constraint Satisfaction With Sensing Restrictions," *arXiv preprint arXiv:1210.7156*, 2012.
- [22] Z. Khan, J. Lehtomaki, L. DaSilva, and M. Latva-aho, "Autonomous Sensing Order Selection Strategies Exploiting Channel Access Information," *Mobile Computing, IEEE Transactions on*, to appear. Available in IEEE Xplore.
- [23] R. Jain, D. Chiu, and W. Hawe, *A quantitative measure of fairness and discrimination for resource allocation in shared computer system*. Eastern Research Laboratory, Digital Equipment Corporation, 1984.
- [24] E. Yücesan, C. Chen, J. Snowdon, and J. Charnes, "Cost: A component-oriented discrete event simulator," in *Winter Simulation Conference*, 2002.
- [25] IEEE, *IEEE 802.11n-2009 - Amendment 5: Enhancements for Higher Throughput*, IEEE Std. 802.11n, 2009.
- [26] L. Sanabria-Russo, J. Barcelo, and B. Bellalta, "Implementing CSMA/ECA in COST." <https://github.com/SanabriaRusso/CSMA-E2CA/tree/researchToStandards>, 2012, [Online].
- [27] I. Tinnirello, G. Bianchi, P. Gallo, D. Garlisi, F. Giuliano, and F. Gringoli, "Wireless mac processors: Programming mac protocols on commodity hardware," in *INFOCOM, 2012 Proceedings IEEE*. IEEE, 2012, pp. 1269–1277.