

UNIVERSITAT POMPEU FABRA

BACHELOR THESIS

Open Sensor Network

Author:

Alejandro ANDREU ISÁBAL

Supervisor:

Dr. Jaume BARCELÓ

*A thesis submitted in fulfilment of the requirements
for the degree of Graduate in Telematic Engineering*

in the

Research Group Name

Department or School Name

June 2013

Declaration of Authorship

I, Alejandro ANDREU ISÁBAL, declare that this thesis titled, 'Open Sensor Network' and the work presented in it are my own. I confirm that:

- This work was done wholly or mainly while in candidature for a research degree at this University.
- Where any part of this thesis has previously been submitted for a degree or any other qualification at this University or any other institution, this has been clearly stated.
- Where I have consulted the published work of others, this is always clearly attributed.
- Where I have quoted from the work of others, the source is always given. With the exception of such quotations, this thesis is entirely my own work.
- I have acknowledged all main sources of help.
- Where the thesis is based on work done by myself jointly with others, I have made clear exactly what was done by others and what I have contributed myself.

Signed:

Date:

“Thanks to my solid academic training, today I can write hundreds of words on virtually any topic without possessing a shred of information, which is how I got a good job in journalism.”

Dave Barry

UNIVERSITAT POMPEU FABRA

Abstract

Escola Superior Politècnica

Department or School Name

Graduate in Telematic Engineering

Open Sensor Network

by Alejandro ANDREU ISÁBAL

Sensor networks are increasingly being used for environmental monitoring to anticipate or react to certain events. Despite many initiatives seemingly encouraging and being based on the use of sensor networks, only a few are really open. In this thesis we design, prototype and test a wireless sensor network using open hardware and open source software. Arduino and ZigBee are the main bases for the sensor nodes, and a Raspberry Pi is used as a data sink. Gathered information is then uploaded to cloud platforms, making it available to developers which can bring new ideas to life. The proposed solution is an economical, flexible and do-it-yourself alternative to those willing to collect and share sensory data.

Acknowledgements

The acknowledgements and the people to thank go here, don't forget to include your project advisor...

Contents

Declaration of Authorship	i
Abstract	iii
Acknowledgements	iv
List of Figures	vii
List of Tables	viii
Abbreviations	ix
1 Introduction	1
2 State Of The Art	3
2.1 Company-driven sensor networks	4
2.1.1 Libelium	4
2.2 Community-led sensor networks	5
2.2.1 Air Quality Egg (AQE)	5
2.2.2 Smart Citizen	6
2.3 Open data services	6
3 Technologies	8
3.1 Sensors	8
3.1.1 Aosong DHT22	9
3.1.2 Emartee Mini Sound Sensor	9
3.1.3 Sharp GP2Y1010AU0F	10
3.1.4 LM35	10
3.2 Digi XBee® Wireless RF Module	11
3.3 Arduino	12
3.3.1 External libraries	14
3.4 Raspberry Pi	14
3.5 D-Link DWA-123	15
3.6 Arch Linux ARM	15
3.7 Python	16

4	Methodology	18
5	Open Sensor Network	20
5.1	Network topology	21
5.1.1	Device roles	22
5.2	Sensor nodes	22
5.2.1	Standalone XBee	24
5.2.1.1	Configuring a standalone XBee®	25
5.2.2	Arduino-based node	26
5.2.2.1	Arduino sketch	27
5.3	Network sink	31
5.3.1	Setting up the sink	32
5.4	Deploying the network	32
A	Appendix Title Here	36
	Bibliography	37

List of Figures

2.1	Libelium logo	4
2.2	Air Quality Egg typical scenario	5
3.1	DHT22 sensor	9
3.2	Sharp GP2Y1010AU0F	10
3.3	TI LM35 temperature sensor	11
3.4	Digi XBee RF Module	11
3.5	Arduino UNO	13
3.6	Raspberry Pi	15
3.7	Arch Linux ARM Logo	15
3.8	Python logo	16
5.1	Mesh Network	21
5.2	ZigBee network example	23
5.3	Screenshot of X-CTU	24
5.4	XBee pinout	25
5.5	Standalone XBee	26
5.6	Arduino-based node schematic	27
5.7	Flow diagram of an Arduino-based node	29
5.8	Value reading flowchart	30
5.9	Raspberry Pi based sink	32
5.10	Flow diagram of the sink script	33
5.11	Packet dispatcher flowchart	34
5.12	Packet uploader flowchart	35

List of Tables

3.1	Comparison of different versions of XBee®.	12
3.2	Characteristics of the Arduino UNO. Taken from the official Arduino website (http://arduino.cc).	14
5.1	Mapping between numbers and data types.	31

Abbreviations

ACK	A C K nowledgement
ADC	A nalog to D igital C onverter
BuB	B ottom-up B roadband
DIO	D igital I nput O utput
ICT	I nformation (and) C ommunications T echnology
ISM	I ndustrial S cientific and M edical
LAN	L ocal A rea N etwork
LoS	L ine of S ight
OS	O perating S ystem
PAN	P ersonal A rea N etwork
RF	R adio F requency
SoC	S ystem on C hip

For/Dedicated to/To my...

Chapter 1

Introduction

During the last years we, the Internet users, just had one chance to know how things are managed, from top to bottom. That is, telecom operators reserve some resources (optic fiber, certain bandwidth, etc.) for each one of their clients and charge them for this service. In a top-down approach the consumer remains completely passive and has to solemnly accept what the telco dictates. Now, a new model pretends to turn this trend upside down.

This new way to do things is called *bottom-up broadband*, and is also how this project is posed. The very same users that were before passive will become very active, helping not only by designing the network but also deploying and maintaining it, thus participating in every step of the system lifecycle. Hence, without a central authority the usufructuaries are the only ones that conform this kind of networks.

Bottom-up broadband (BuB from now on) schemes have several important advantages over those that follow a conventional top-down approach, such as: easier and faster setup due to the lack of a central authority (as it happens in peer-to-peer networks), it can be adapted to anyone's needs since they are the caretakers of the system, and could also become the solution to those that live in an area that is not economically attractive to regular ISPs[].

As for disadvantages, a BuB network creation can be very time consuming, since users participate in every single step of this endeavor[].

Sensor networks are very important nowadays and its objective is to gather data.

Data itself isn't good nor bad. Data just represents the surrounding reality.
The more data we may access, the more accurate model we may create of the

reality, thereby also define our actions in ways that are maximally beneficial to our aims[].

But, does it make sense building such a sytem under a BuB model? The answer is yes, it does. As it happened with traditional telecom operators, the information that is obtained through sensor networks is kept by the agencies that own them without even making a public API¹ to “play” with this data.

Therefore the main goal of this project is to design and deploy a sensor network that gathers real-time information and that enables developers to create applications that will ultimately help the citizenship improve their daily lives. Intrinsically this can be divided in more specific objectives, such as:

- Allow citizens, individuals belonging an organization or even enterprises to connect scattered sensor nodes.
- Collect different kinds of information and transmit it to the Internet.
- Samples (values of sensors) must be gathered ofen enough to be almost real-time.
- Use of open technologies to allow easier replication and modification as well as reducing final costs.
- The project shall become a tool so anyone that needs or wants to deploy a sensor network can do it as soon as possible.

Chapter 2 takes a look at the state of the art. That is, why are sensor network important nowadays and what has been done until now regarding commercial and open solutions.

Chapter 3 shows what technologies have been used to complete this endeavor. A brief description about each element is attached so the reader can replicate more easily the network and have some details at first glance.

Chapter 4 focuses on the way this pilot has been completed. That is, the methodology that has been followed, as well as how problems have been confronted.

In Chapter 5 we can see how is each node and the designed and also how programs and scripts work, mainly through flow diagrams.

¹Explicar API?

Chapter 2

State Of The Art

Sensor networks, as many other technological advances see their origin on military research. They date back to the early 60's during the Cold War, when the United States deployed an underwater system to detect Soviet submarines called SOSUS (sound surveillance system). However, it is not until the beginnings of the 21st century that more applications were found beyond warfare. The main causes for that to happen is that the cost and the size of the components did decrease.

Another crucial factor for this to happen is that new sets of wireless standards did see the light. On one hand we have IEEE 802.15 that allows to create low bitrate networks called WPANs¹ which incredibly extend battery lifetimes. On the other hand IEEE 802.11 enables wireless communications to experiment similar bitrates to those obtained in a wired network.

One of the motivations to develop an open sensor network is that normally those who are the owners of the information keep it to themselves, a situation on which nothing is given back to society. Therefore, it is important to share all gathered information.

Deploying sensor networks significantly contributes to the growth of smart cities ICT² structures which, at the same time make social, cultural and urban development thrive[1][2].

There are already some initiatives that are based on wireless sensor networks. The word “initiative” is not intended to refer just to companies but also to organizations and individuals, from city halls that want to improve the daily lives of its citizens to people that want to share the environmental conditions from their balconies.

¹Wireless personal area networks, defined in IEEE 802.15, refer to wireless networks where devices are just a few meters away from each other.

²Information and communications technology.

At the time of writing, we can distinguish between two main kinds of sensor networks: company-driven and community-driven networks, depending on who shapes the system.

These networks can generate a big amount of data creating the necessity of storing this information and making it always available for further usage. There are already some websites with the only objective of storing this information and providing beautiful visualization tools.

2.1 Company-driven sensor networks

These kind of systems work normally in an opaque or translucent way but with the advantage that they have very clear objectives. Also, they usually have more resources, as making money is the main motivation.

expandir

2.1.1 Libelium

Having its headquarters in Aragón (Spain), this is one of the biggest companies in the world built around wireless sensor networks. It offers the mechanisms and tools to deploy and build systems around the Internet of Things, smart cities and M2M³ communications.



FIGURE 2.1: Libelium logo.

The majority of the products they sell are focused on one specific application, such as waste management, structural health, etc. These systems are intended to be bought by system integrators for end users. However, they also offer the so-called “Waspnote”, which is a sensor device for developers that can be freely customized and reprogrammed, since it is an open source product.

Their products are being widely used across more than 75 countries and they are definitely one of the leaders of the wireless sensor network industry.

³Machine-to-machine communications are established between two devices.

2.2 Community-led sensor networks

Projects that are driven by the community give all the decision making power as well as resources to the community. The individuals that conform the community are very passionate about what they do and the workflow is highly transparent.

Community-driven projects give more control to the individual user. *expanding*

2.2.1 Air Quality Egg (AQE)

This is a sensor network that aims, as its own name indicates, to measure the air quality. This is through NO_2 and CO levels.

Each user is supposed to connect their egg to their local network via an Ethernet interface. Then, a bunch of outdoor sensors are placed outside and communicate their readings to the base station —as it can be seen in figure 2.2— wirelessly through a radio frequency transmitter. Finally the data is sent in real time to Cosm⁴, an open data portal that will be described in the next section.

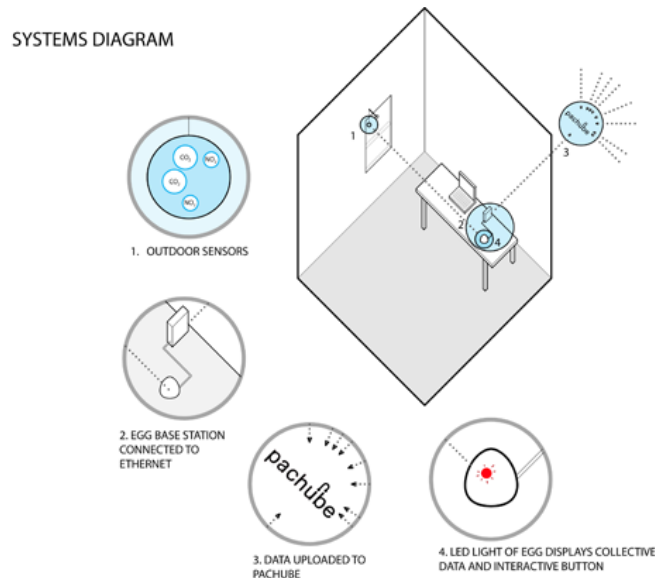


FIGURE 2.2: AQE typical scenario.

It is worth mentioning that the AQE project is completely open, hence anyone can improve the platform as well as building his own egg from scratch

⁴<http://www.cosm.com>

without having to actually buy one. All the information related to the hardware, software and sensor calibration can be found in their wiki⁵.

2.2.2 Smart Citizen

Designed in Barcelona, this is a very young project (still in beta stage) that intends to create the biggest community around social sensing. It was initially crowdfounded in 2012 through a Goteo⁶ campaign and they are planning on going to Kickstarter soon.

The Smart Citizen platform allows its users to precisely geolocate their data and see other users' information. There is also a very big emphasis in data sociability, since every value or datastream⁷ can be shared through any social networking site or inside the same web application.

Openness is as well one of their main values, since every piece of code (including the very own website) is open source licensed.

2.3 Open data services

All gathered information must be stored in some place, and this is where open data portals (also called Internet of Things clouds) come in play.

These websites provide users with an open API so they can upload new values, create new feeds⁸, retrieve the data and even create customized triggers, such as sending a push notification to a smartphone or even “tweeting” something. This way, we cannot only sense but *react* to certain kinds of events.

Because data by itself is usually worthless, one of their most important features is the availability of data visualization tools. They allow us to easily detect patterns and also even correlate certain factors.

Good examples of these sites are, as mentioned before, Cosm (now renamed to Xively) and Sen.se⁹. Both are free to use and very easy to interact with—mainly through simple HTTP packets—.

⁵<http://airqualityegg.wikispaces.org>

⁶Goteo is a Spanish social network that helps crowdfund open projects that result in a society improvement.

⁷Set of values that represent an individual sensor.

⁸Representation of an environment. A feed can be, for instance, a museum hall where presence and noise levels are measured.

⁹<http://open.sen.se/>

In case we want to host our own cloud for the Internet of Things, there is also a great solution called Nimbits¹⁰. It is open source software and anyone can install it in its own server. It is very easy to fetch and push data to the platform, since it has a RESTful API¹¹.

¹⁰<http://nimbits.com>

¹¹Web API that works with the regular HTTP methods. That is, GET, PUT, POST and DELETE.

Chapter 3

Technologies

Three essential blocks form a sensor network. Namely sensors, processors and communication devices[3]. In the next sections all of them will be explained and in the next chapter I will show how are these related. There is even a case where a device (Digi XBee®) fulfills two of these roles.

3.1 Sensors

We now live in a world where we hear a lot the word “sensor”, but what is exactly a sensor? *“A sensor is a converter that measures a physical quantity and converts it into a signal which can be read by an observer or by an instrument”*[4]. This definition might seem (and is) quite simple, but complexity resides on calibration and coming up with actual useful applications.

Since every sensor from the same family is equal in terms of design but different in reality (due to small random variations during the fabrication process) output has to be adjusted to agree with a given standard. When it comes to applications, only imagination poses a limit. RFID tags can be used to determine wether a book is on the right spot in a library or not, or with a very intense light beam we can detect how the blood flows through a vein therefore succesfully sensing heart rate. These are just two imaginative uses for nowadays sensors.

As for types of sensors, we have simple sensors/complex sensors and passive/active. Simple ones just provide us with very basic information —a binary state—. Cameras, on the other hand, are a perfect example of complex sensors. Active emit a signal to the environment and then measure the response, while passive just measure a factor from the surroundings.

Also, the output of a sensor can be expressed in two forms: digital and analog, depending on how data transmission is done. Digital means that the output is represented in the form of bits, thus requiring some amount of computational power to “interpret” the results. Analog sensors usually act as a variable resistance depending on some factor, so zero processing power is needed.

To complete this project, only environmental factors have been measured since those have been tested over and over for the last years and they serve as a proof of concept for this network. Also, sensors are not the main focus of the pilot but the tools to deploy such a network.

3.1.1 Aosong DHT22

The DHT22 is a low cost, humidity and temperature measuring digital sensor designed by Aosong Electronics, a Chinese corporation¹.

The output —although digital— uses a special single-wire protocol² format that is precisely described in the datasheet. Luckily there already are some library implementations to work with the DHT22. Then, this device will only work with platforms that allow digital input, such Arduino.

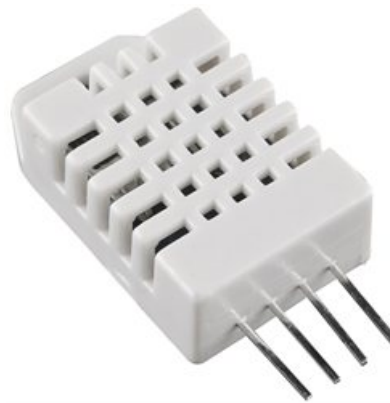


FIGURE 3.1: DHT22 humidity and temperature sensor.

3.1.2 Emartee Mini Sound Sensor

Manufactured by Emartee, can also be found by the name of “Emartee part number 4021”, and can be used to measure noise levels among other uses.

¹Its datasheet can be found at: <http://www.adafruit.com/datasheets/DHT22.pdf>

²All useful information is transmitted through just one of its pins.

Essentially, it consists on a microphone with a built-in amplifier onto a break-out board. This last feature can be useful to work directly with perfboards or breadboards³.

The output signal is analog and is increased (amplified) by some factor that allows an Arduino or any device with analog input pins to detect this signal easily[5]. Its operating voltage is 5V.

3.1.3 Sharp GP2Y1010AU0F

This is an inexpensive optical dust sensor, used to measure air quality. It is made out of an infrared emitting diode which, with a well positioned phototransistor can measure the reflected IR rays thus detecting dust levels in the air[6]. This device, which can be powered with up to 7V gives an output voltage proportional to dust density in the air. Some of its applications are air monitoring and air conditioning.




FIGURE 3.2: Sharp GP2Y1010AU0F optical dust sensor.

Surprisingly, this detector, which is priced at the time of writing about \$12, gives very precise results, similar to those offered by an expensive laser particle counter[7].

3.1.4 LM35

The LM35 is an analog sensor designed by Texas Instruments that precisely measures temperature⁴. Its output is linear to temperature—in Celsius degrees—which means that this sensory value will not have to be processed later.

³Both are construction bases for rapid prototyping of electronic circuits.

⁴Datasheet: <http://www.ti.com/lit/ds/symlink/lm35.pdf>

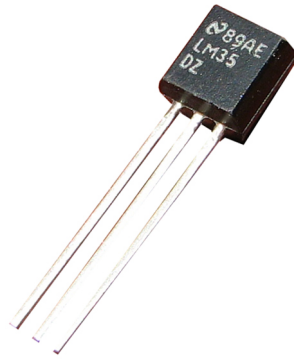


FIGURE 3.3: TI LM35 temperature sensor.

3.2 Digi XBee® Wireless RF Module

These radio modules are based on the IEEE 802.15.4 standard and provide unexpensive, low power, low rate communication. They mainly use ISM⁵ bands.

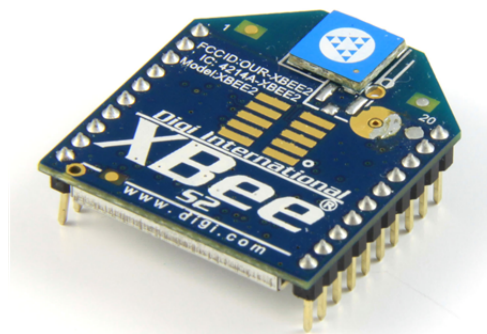


FIGURE 3.4: Digi XBee® Wireless RF Module

There are two versions of these modules, named “Series 1” and “Series 2”. The older one (Series 1) implements the previously mentioned IEEE 802.15.4 standard which enables the network to be configured in point to point topologies. On the other hand however, the latter implements a standard specification called *ZigBee*⁶. This protocol, although more complex has mesh networking capabilities which can be a key feature in some sensor networks.

⁵Descripción de ISM.

⁶Protocol stack developed and maintained by the ZigBee Alliance, it was originally conceived because radio networks strongly needed ad-hoc and self-healing capabilities.

Despite their size these devices provide us with many interesting features, such as 128-bit encryption, over-the-air configuration and several pins that enables the XBee to read analog values as well as working with digital input and output[8].

This is why for the sake of this project “Series 2” has been chosen. It is worth saying that each of the two versions can transmit with different power levels thus varying the effective communication range[9]. More detailed information can be found in table 3.1.

Also, any XBee® device has two operational modes, namely transparent and API. In transparent mode —also known as AT mode—, the device only relays serial data until it reaches the network coordinator. This mode is simple and “universal”, since a connection can be established with every device that speaks and understands serial. However, neither data reception or integrity are assured (specially when working with the popular 2.4GHz ISM band, which is highly saturated) and eavesdropping can be a real problem since encryption cannot be used. On the other hand, API mode is slightly more complex than transparent mode, since information is encapsulated in packets.

Version	Power	Indoor range	LoS range ⁷
Series 1	1mW	30m	100m
Series 1 PRO	63mW ⁸	90m	1600m
Series 2	2mW	40m	120m
Series 2 PRO	63mW ⁸	90m	1500m

TABLE 3.1: Comparison of different versions of XBee®.

Also, if extra range is needed (up to 40km in line of sight) there are also XBee® devices that transmit in lower ISM bands —900 and 868 MHz—. However, when transmitting in these frequencies neither ZigBee nor IEEE 802.15.4 can be used. DigiMesh™ networking protocol is the only option and it is property of Digi International Inc, which has extra features.

3.3 Arduino

Arduino is the leading prototyping platform nowadays. It is completely open source including the schematics of the hardware itself, which is a single-board microcontroller. Anyone can program the board through a programming

⁷LoS range refers to line of sight range. That is, when a straight line can be drawn from the transmitter to the receiver. In this situation, there are no obstacles between them and better bitrates and/or ranges can be achieved.

⁸This output power can be obtained using high gain antennas.

language very similar to C/C++ and based on Wiring⁷. To upload a sketch—a program—to the microcontroller they also have developed an Arduino IDE based on the Processing IDE⁸.

The amount of projects related to this platform is incredibly big, and it has gained huge popularity amongst designers, hackers, programmers and hobbyists these past years. It offers several advantages over similar devices, because it is really cheap, cross-platform and has every benefit inherent to the open source initiative. Also, like other open projects Arduino comes in many “flavours” depending on the characteristics of the project.

As it can be seen in figure 3.5, the board has many input/output pins that are compatible with analog and digital values. It’s not just that but also it can establish a serial communication with a computer so interaction between programs and the platform can take place.



FIGURE 3.5: Arduino UNO prototyping platform.

Arduino UNO is the one “flavour” that has been chosen to perform this project, since it is cheap and also the most common. That means all shields⁹ work by default on it and the community it has is the biggest. In particular, this model has the following features (table 3.2):

⁷<http://wiring.org.co>

⁸More information about Processing and its IDE can be found at <http://processing.org>

⁹A shield is another board plugged on top of the Arduino to extend its functionalities (for instance Ethernet, Wi-Fi, SD cards, etc.).

Feature	Value
Microcontroller	ATmega328
Operating Voltage	5V
Input Voltage (recommended)	7-12V
Input Voltage (limits)	6-20V
Digital I/O Pins	14 (of which 6 provide PWM output)
Analog Input Pins	6
DC Current per I/O Pin	40 mA
DC Current for 3.3V Pin	50 mA
Flash Memory	32 KB (ATmega328) of which 0.5 KB used by bootloader
SRAM	KB (ATmega328)
EEPROM	1 KB (ATmega328)
Clock Speed	16 MHz

TABLE 3.2: Characteristics of the Arduino UNO. Taken from the official Arduino website (<http://arduino.cc>).

3.3.1 External libraries

In order to interact with the XBee module I used the `xbee-arduino` library, which is C/C++ library that enables an Arduino to send and receive information via an XBee® radio. It was originally developed by Andrew Rapp and is currently hosted on Google Code¹⁰.

3.4 Raspberry Pi

This device is an inexpensive GNU/Linux box that follows an ARM architecture and acts as the sink of the network. There are two models of this device: one that has 256MB of RAM (known as “model A”), and another one that has 512MB of such memory (“model B”). As for the processor it utilizes a 700MHz Broadcom SoC¹¹. The operating system is directly loaded from an SD.

Currently it supports many popular distributions, such as: Arch Linux, Raspbian (a fork of Debian specifically designed to run on the Raspberry Pi), Gentoo, NetBSD, etc.

This is an optional part of the network since an XBee can be attached to any device that speaks serial. Nonetheless it is small and low-power, providing the necessary versatility for this kind of systems.

¹⁰More information can be found at <https://code.google.com/p/xbee-arduino/>

¹¹System on a chip are integrated circuits that collect all the necessary modules of a traditional computer in one single chip.

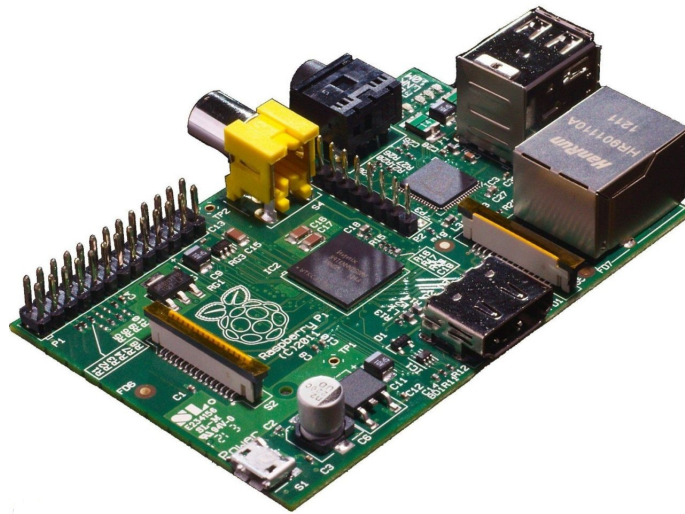


FIGURE 3.6: A Raspberry Pi.

3.5 D-Link DWA-123

The Raspberry Pi, as stated before, has an ethernet interface, but in case such option is not available, a Wi-Fi dongle is the best solution. This model in particular works out-of-the box with some Raspberry Pi GNU/Linux distributions. Also, it is cheap and supports IEEE 802.11b/g/n. This device will be the bridge between the XBee network and the Internet.

3.6 Arch Linux ARM

The project originally started as a port of the popular distribution Arch Linux¹², compiled for ARM devices. The main feature of this “distro” is *simplicity*.



FIGURE 3.7: Arch Linux ARM logo.

¹²<http://archlinux.org>

Arch Linux ARM follows, as its predecessor does, the KISS (“keep it simple, stupid”) principle, which means it just provides a working and minimalist system to work with. That is, no unnecessary packages are installed by default, giving the user complete control of its operative system. For instance, no GUI is available by default and everything must be done through the terminal (at least in the first place). This means the Raspberry Pi will be running a lightweight operative system, therefore leaving more resources to process all the data.

3.7 Python

Python is a general-purpose, high-level scripting programming language that first saw the light of day in 1991, originally designed by Guido van Rossum. It is an open source language that has more than one implementation. The default implementation —and used in this project— is CPython, which is written in C.

There are two main versions of this programming language, 2.x and 3.x which are not compatible. Version 2.x will be the one used to complete the project since more libraries and modules use Python 2.x.



FIGURE 3.8: Python logo.

This project does not utilize solely the standard libraries but also some additional ones, such as:

- **pyserial**¹³ — This library enables Python to establish serial connections (more specifically, following the RS-232 standard) with all kinds of devices. In this case, it allows us to receive data from an XBee® module.
- **python-xbee**¹⁴ — Written by Paul Malmsten, this library allows Python to work with XBee API serial information. It has two main operational modes, synchronous and asynchronous. That is, continuously receiving

¹³<http://pyserial.sourceforge.net/>

¹⁴<https://code.google.com/p/python-xbee/>

information from an XBee® (and blocking the whole program until it finishes) or spawning a new background thread every time a new packet arrives, respectively.

- **python-requests**¹⁵ — This is an HTTP library that, according to its creator, is written “for human beings”. In other words, HTTP requests made easy. This module will be used to upload sensory data to the Internet

¹⁵<http://python-requests.org/>

Chapter 4

Methodology

The first step I took to complete this project was having a deep look at the state of the art. There are a lot of sensor network designs and some are as well open sourced, but the majority of them require either advanced knowledge on PCB fabrication or are focused on just one particular area—they aim to solve just one problem—. Thus developing a system which is multipurpose and uses well-known technologies for rapid deployment are some of the key requirements that this network should meet (apart from the initial objectives).

Once all initial requirements are identified I had to choose one appropriate life cycle for the project. The pilot scope was not strictly constrained thus changes shall be handled in some way. Consequently, I chose an *agile* approach.

Agile management is a special case of iterative management, driven by changes[10]. Development of small modules is the usual thing, with deadlines every two or four weeks. Also, stakeholders are highly involved which is very related to the approach we followed all the components of BuB4EU. Each month there was a scheduled workshop where every participant informed the rest of the team about his last advancements. This method is very useful for getting constant feedback hence improving the overall quality of the project.

Also, when problems emerged we have an available mailing list¹. There, each participant can propose whatever he/she wants, but also ask questions and await for answers. This way, we have achieved a solid level of collaboration.

At the same time, the pilot followed an open development model, since it was—and still is—available on GitHub from the beginning². I decided to go

¹Hosted in Guifi.net servers, accessible by entering <https://l1istes.guifi.net/sympa/arc/bub>.

²The repository can be found at <https://github.com/aandreuissabal/OSN>. To see the latest changes, check out the “develop” branch.

with a complete open model because this way I give back something to the community, since I am benefiting so much from it to complete this project.

Chapter 5

Open Sensor Network

The result of working on this pilot is a set of tools (e.g. server script, schematics, Arduino program, etc.) that can be used to easily deploy a sensor network with well-tested and mature solutions that automatically uploads the information to the Internet. The two main features that define this network are:

- Ease of deployment — The server runs a general purpose Python script that doesn't care of the actual information it receives. Instead, it just uploads data to the selected webpages. To deploy such a network, only the XBee® radios have to be configured correctly, as well as wiring the circuits accordingly. There is no need to focus on the underlying details of information transmission.
- Flexibility — The system is prepared to transmit heterogeneous information. Each node is able to transmit different information and the sink will decode it anyway. This allows a community to gather what each individual wants or to achieve better granularity where needed. That is, someone might be interested in measuring temperature every two blocks and humidity every four blocks.

In the following sections, everything concerning this network will be explained in detail: feasible scenarios, how to configure the XBee radios, how does the sink script work, etc.

5.1 Network topology

Network topology refers to the way nodes that conform the system are arranged, thus it is clear that this factor will determine very important components about the network, such as reliability, modularity, fault occurrence, etc. The use of Digi Xbee® RF modules enables the network to be configured in any kind of topology, from a simple ring to a complex mesh¹. An example of a mesh network is depicted in figure 5.1, where each circle represents a node and the lines the wireless links between them.

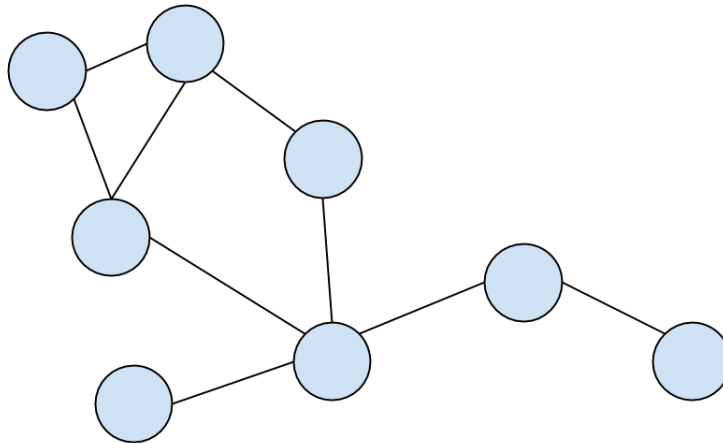


FIGURE 5.1: An example of a mesh network.

As these RF devices only allow one single sink per network, not making use of mesh topologies would be an enormous drawback, since packet delivery would be subject to other nodes availability. Luckily, ZigBee specification allows that some nodes act as a relay for other nodes, enabling us to build complex networks with redundant paths. This statement, translated to battery-powered systems means that the more relay nodes a network has, the more prolonged the network's lifetime will be[11], since relay nodes will have to pass on less messages.

A mesh sensor network of this kind can be fully connected —each node is connected to every other one— or partially connected. This topology, as defined in the ZigBee specification have many advantages. They basically enable the system to be:

- Self-healing — Allows the network to operate when a node goes down.

¹Networks where a packet can follow more than one path to reach its destination.

- Self-routing — When a packet is transmitted or forwarded, the route that it follows is created —that is, calculated— locally within every node.
- Self-forming — Nodes that are new to the network create links automatically with the rest of nodes and routes are created dynamically as well.

5.1.1 Device roles

Inside an ZigBee network there are three roles that a node can assume: coordinator, router and end device.

A *coordinator* is the sink of the network, and as stated before, only one is allowed per network. A coordinator stores vital information about the network, acts as well as the trust center² and manages network security in general[12]. In this case, it will be connected to the Raspberry Pi so data can be processed and uploaded to the Internet.

A *router* has the same function as the previously mentioned relay nodes. It can generate and transmit data by itself to other router or a coordinator but it is also able to forward packets from other nodes. If the network is very redundant it should not be a problem having a battery-powered router.

Finally, an *end device* is the least capable device of all. It can only transmit information that will be or will not be forwarded, thus they are always on the edge of the network. Since no other node depends on an end device, they can make use of the *sleep mode*. This mode allows an XBee radio to wake up every certain amount of time thus saving a lot of power.

An example of such a network can be seen in figure 5.2.

5.2 Sensor nodes

A sensor node is an element inside a wireless sensor network that is capable of gathering information, has some processing power and can relay information (if needed) to other nodes in the network[3].

In the design of this network two feasible scenarios have been considered, depending on which kind of sensors need to be used —whether they are digital or analogic—, and if processing power is required.

²Stores the keys if encryption is enabled, deciding who may or may not join the network.

ZigBee Network Topology

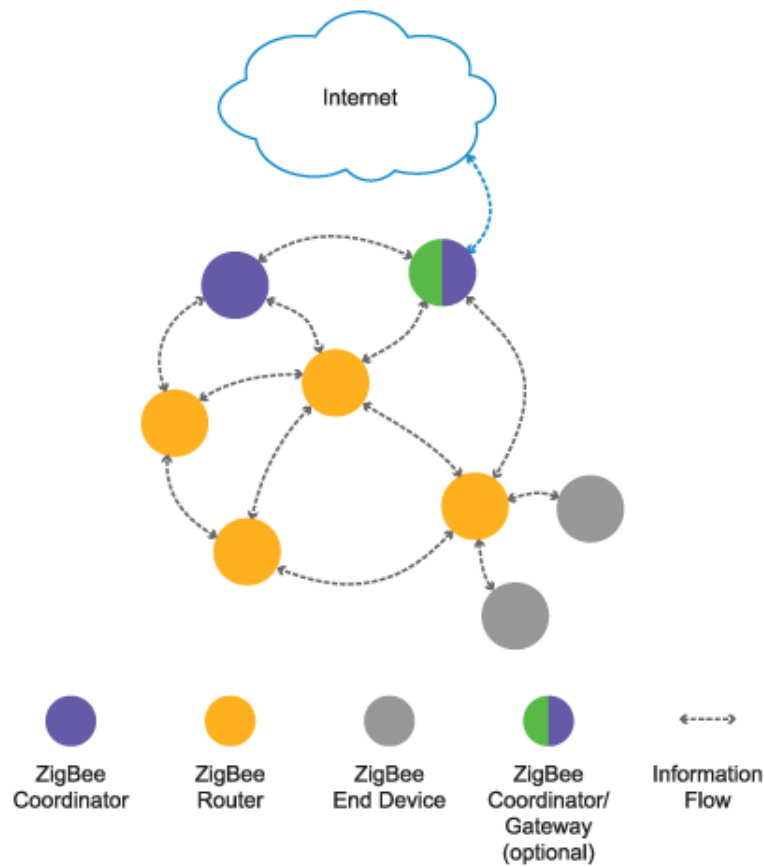


FIGURE 5.2: An example of an ZigBee network, taken from the ZigBee Alliance website (<http://zigbee.org>).

In case at least one of those features is needed, an Arduino plus an XBee® module are coupled together, with sensors attached to the board. Otherwise a standalone XBee® is used since it has a built-in ADC³, hence being able to directly read information from analog sensors.

These two operational modes have been taken in consideration because despite one of them can equate the other's characteristics one can think of some applications where the features of an additional microcontroller are just not needed. For instance, a sensor network monitoring temperature in an industrial environment just needs the so-mentioned analog-to-digital converter and a transceiver. Although there are two types of nodes, both can be used at the same time inside a given network.

³An analog-to-digital converter takes a continuous value –voltage, in our case– as its input and converts it to a digital numeral.

To configure the radio of a sensor node one must use X-CTU, a piece of software developed by Digi International that, although it is intended to be run on Windows, it works fine on GNU/Linux using Wine⁴, as it can be seen in figure 5.3.

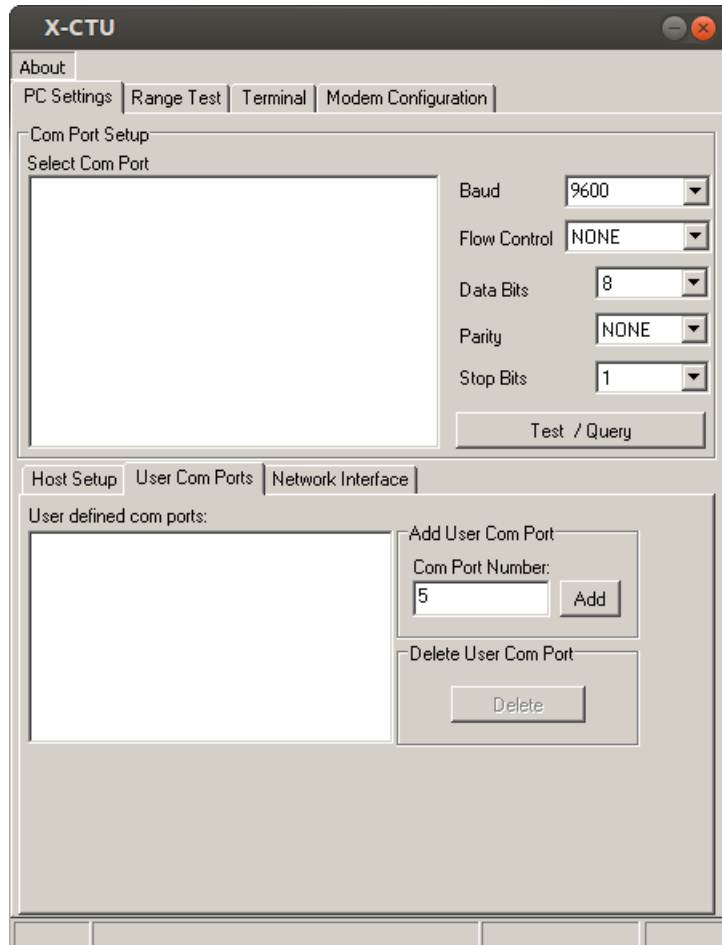


FIGURE 5.3: A screenshot of X-CTU running on Ubuntu 12.04 under Wine.

5.2.1 Standalone XBee

As mentioned in section 3.2, any XBee device has two modes of operation, namely API and transparent. We will be using API mode, which provides several advantages:

- When the coordinator receives a packet, it immediately transmits an ACK⁵ packet. If such packet is not received then transmitting radio will retry sending it.

⁴Wine is open source software that helps running Microsoft Windows applications on Unix-like operating systems.

⁵Acknowledgement packets are used to indicate that the transmission was successful.

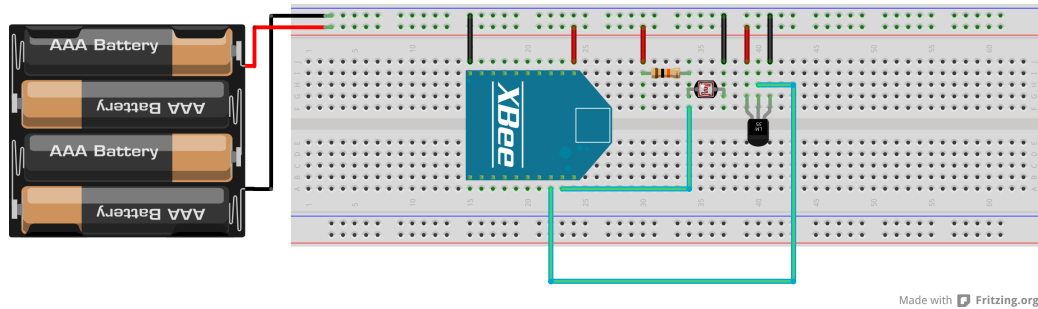


FIGURE 5.5: A standalone XBee node.

To configure a standalone node one must connect it to X-CTU ensure that it has the same PANID than the coordinator—that is, in the same network—. Also, API mode shall be enabled, thus setting the AP parameter to 2, which means not only that API mode must be used but also *escaping*.

With escaping mode enabled the system escapes some special characters. In other words, if special characters appear in the packet—for instance 0x7E, which serves as a start frame delimiter—they are replaced by other sequences so they can be decoded as well by the receiver but without causing any trouble in the interpretation phase. Receiving an arbitrary 0x7E could pose many problems for the receiver. It would not know when a packet really starts[13].

Some example configuration files were exported from X-CTU and can be freely downloaded from the original git repository⁸ (hosted in GitHub).

5.2.2 Arduino-based node

Arduino is capable of executing C code, thus being able to process any kind of information no matter how complex it is (always bearing in mind its hardware limits). To transmit all the information, the RF module attached to it will be configured in API mode.

As a proof of concept, the example setup I have worked with has an analog sensor that measures sound levels (3.1.2), another one that measures air quality in terms of fine particles in the air (3.1.3) and a digital sensor that reads humidity and temperature (3.1.1). The elements that conform except the air quality sensor are arranged as depicted in figure 5.6.

This type of node has the same communication features as the standalone XBee. That is, encryption, acknowledgements, etc. In particular, ACKs are better handled in this case since an Arduino can *react* to them.

⁸<https://github.com/aandreuisabal/OSN>

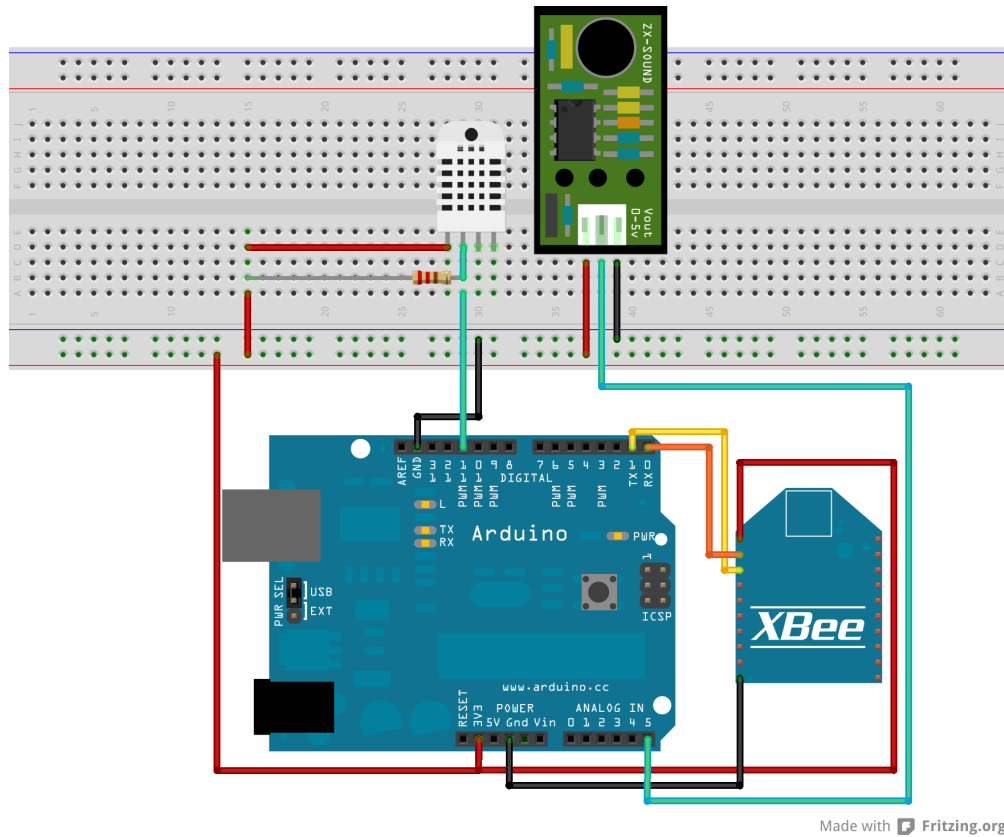


FIGURE 5.6: Sensor node based on Arduino.

5.2.2.1 Arduino sketch

A sketch is nothing more than the program an Arduino runs. The basic code is written in C/C++, and it consists of a main file—with `.ino` extension—and the XBee® libraries. The code can be browsed and downloaded via GitHub. There are two versions of the sketch:

- Exact same code I used to conduct the experiments, so anyone can verify and/or test the obtained results.
- A skeleton file, that follows a very minimalistic approach in terms of lines of code but fully commented. This way, it can be extended as desired to build a sensor network from scratch with customized sensor nodes.

Arduino IDE is based on Processing IDE⁹, and it follows the same structure than the Processing programming language. There are two main functions necessary for every program to work, namely `setup()` and another one called `loop()`. Respectively:

⁹<http://processing.org>

- The `setup()` function initializes variables, modules (such as the XBee), libraries and sets pins in specific modes. After this function is successfully executed `loop()` is immediately called.
- `loop()` is a function that as its own name indicates, is executed over and over again. Thus inside this structure is where the action takes place.

Before even `setup()` starts, the following steps take place:

- An object of type `XBee` is created, so serial information can be exchanged between the microcontroller and the RF module.
- Additional information useful for the transmission is set: destination address, how big the packet will be, etc.
- Also, an array called `payload` is initialized, which will contain all readings as well as some *metadata*.
- The variables that will hold the different readings are also declared outside the two main function so they are recognized in a global scope.
- Finally, necessary C unions¹⁰ are created. One for every compatible data type.

In our `setup()` step we initialize a serial connection with the XBee® and set a pin to act as digital output. This pin is the number 13, which is connected to the on-board LED.

Then, in `loop()` all sensory values are recollected and then transmitted via a ZigBee packet. Finally if the previously mentioned LED blinks once that will mean transmission took place successfully, otherwise it will blink twice. This last feature is especially interesting when debugging.

In figure 5.7 it is depicted how the program works in more detail. This flow diagram follows a top-down approach. That is, from general to more specific functions.

As for how values are read from the Arduino, figure 5.8 explains how this process takes place step by step. Basically, digital values are read one time since the readings are more precise, and when reading an analog value the Arduino computes an average of `n` samples to smoothe the values from “jumpy” sensors.

Since an initial requirement was that each sensor node can transmit whatever it needs to, I designed a rudimentary but efficient mechanism. At the start of

¹⁰An union allows us to represent information in more than one way. In our case it helps us convert integers, booleans, etc. into byte-level data.

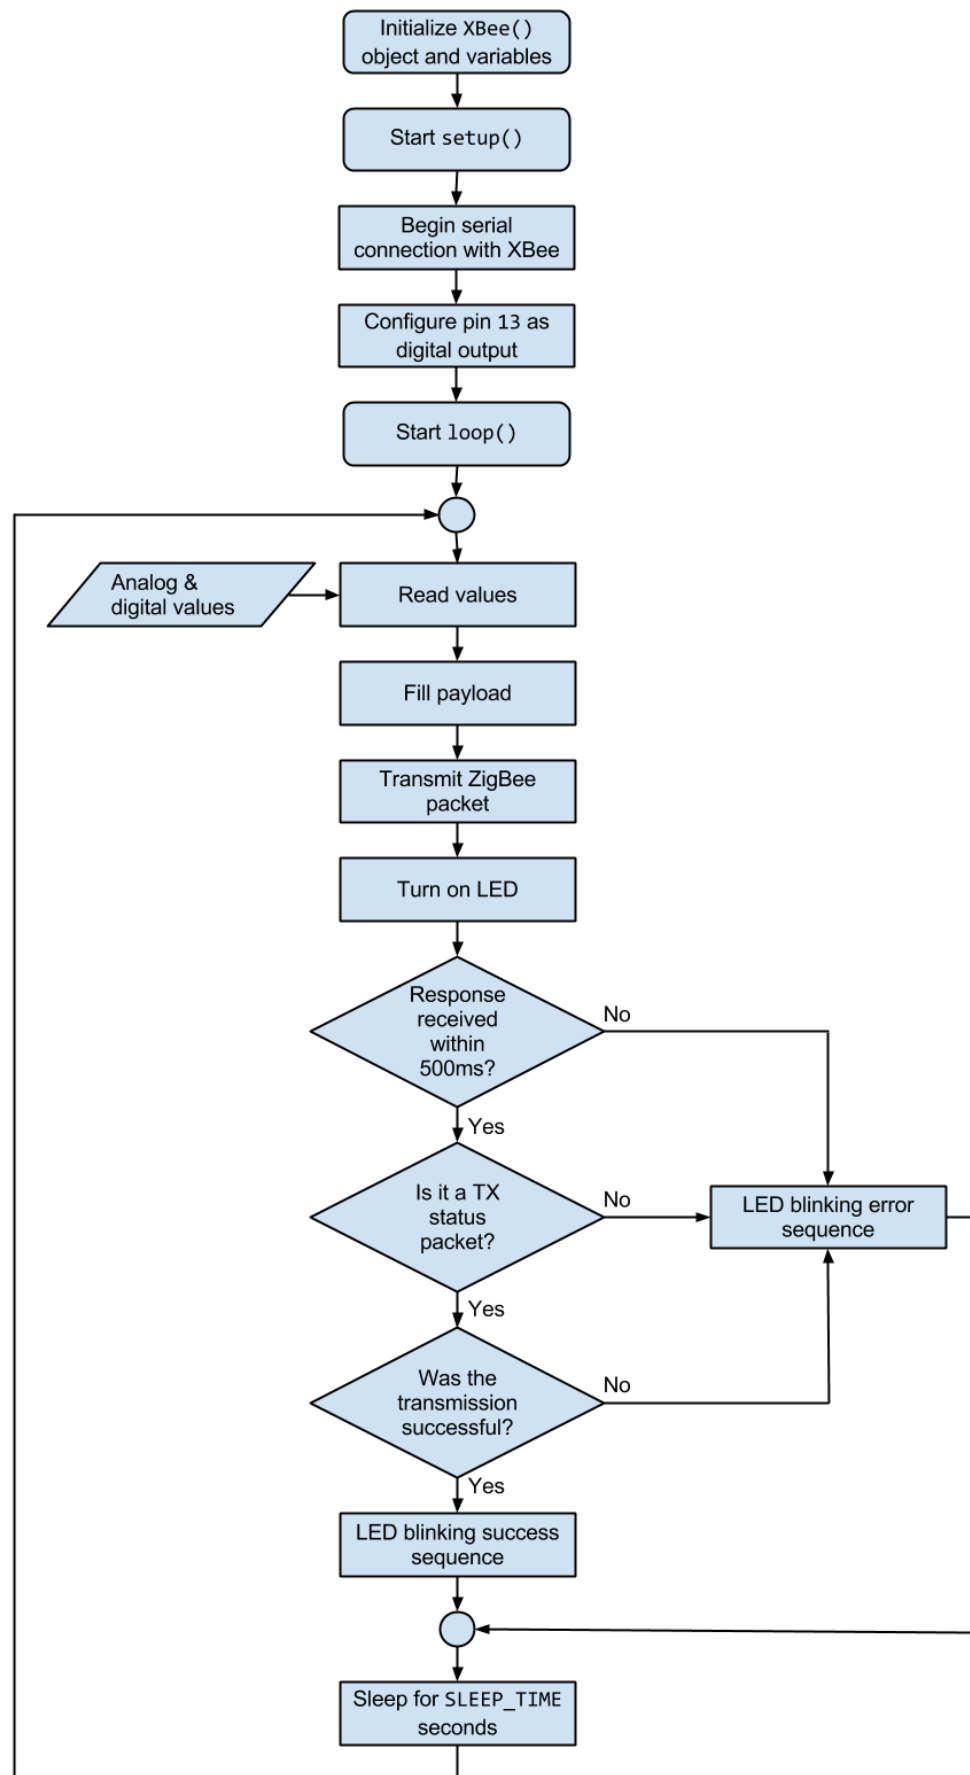


FIGURE 5.7: Flow diagram of the Arduino program.

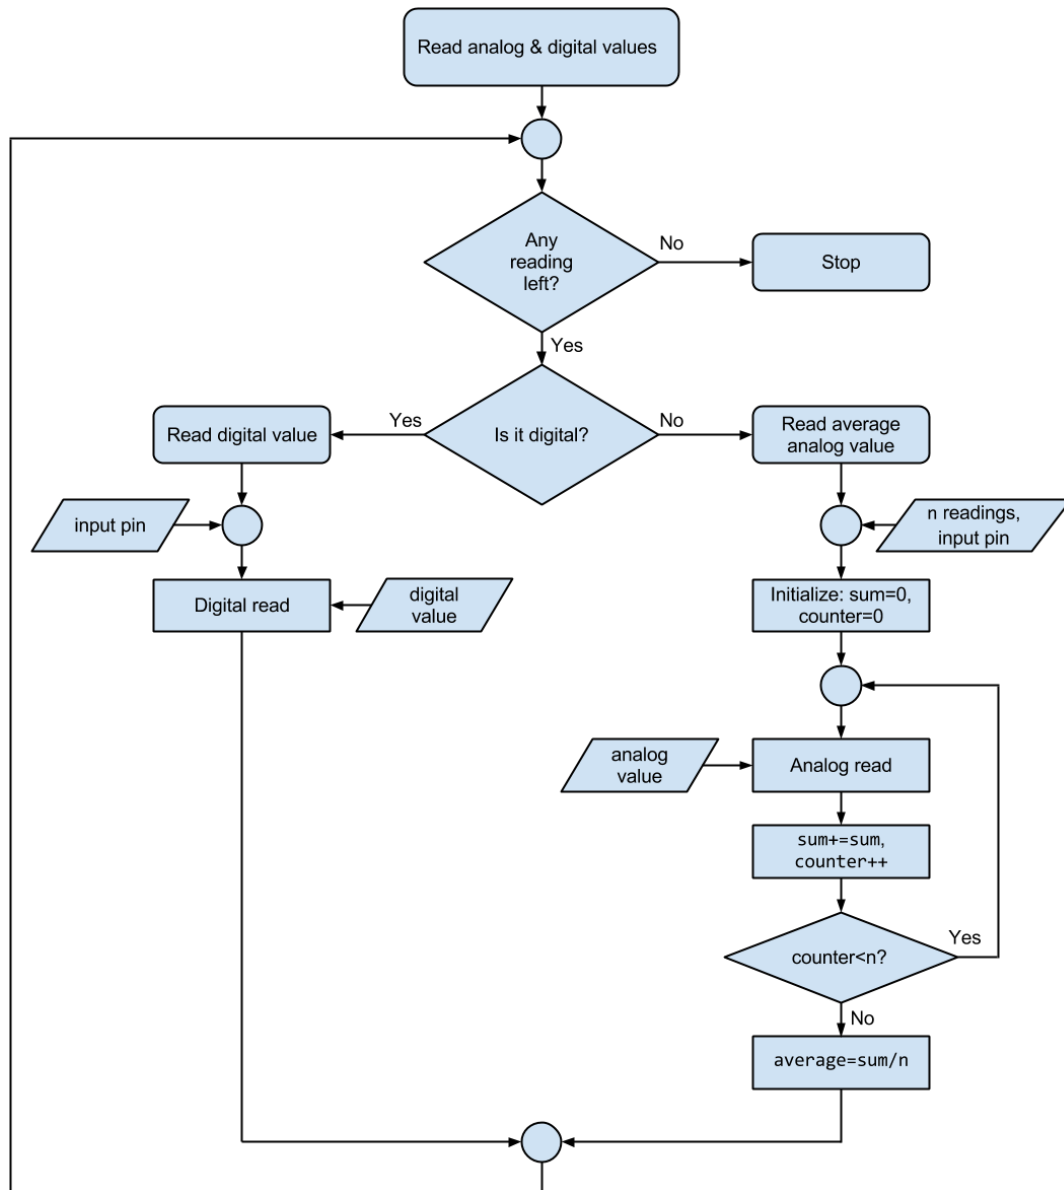


FIGURE 5.8: Flowchart of how values are read.

every packet, an integer is sent. This is the only fixed value that every packet will hold. This integer, represented by several digits, will be tremendously helpful so the sink knows how to decode the payload —keep in mind that data is expressed in binary form—.

To come up with an actual way to translate between digits and data types, I had a look at which data types Python structures and Arduino shared. The results are shown in table 5.1. For more information on supported data types one can visit the reference on the official Arduino webpage¹¹ and

¹¹<http://arduino.cc/en/Reference/HomePage>

Python documentation on data structures¹².

So if for instance, a node wants to transmit two floats and a boolean it can transmit 199 as the first number or also 991, depending on the actual order of the values in the payload. Nonetheless, it is recommended to transmit first the data types that are represented by the smallest digits —from 1, 2...9, 0— so the range of an integer is not exceeded and data can be unpacked correctly.

Number	Data type
1	boolean
2	char
3	unsigned char
4	int
5	unsined int
6	long
7	unsigned long
8	short
9	float
0	double

TABLE 5.1: Mapping between numbers and data types.

5.3 Network sink

The sink is where all the information is headed. As stated in the previous section, it is composed of a Raspberry Pi with an XBee module connected to it. The schematic, although simple can be seen in the figure 5.9. Note that in the figure there is not an XBee but a breakout board for it that has a miniUSB interface, very useful for our purposes. On top of it there is the actual XBee®.

The GNU/Linux distribution that has been chosen to operate in this device is Arch Linux ARM, as stated in section 3.6. Its repositories are huge because regular users contribute to a non-official repository, called “Arch User Repository” (also known as AUR). There, all the packages mentioned in chapter 3 are available without compiling from source—in the form of binaries—.

The script, called `server.py` is then run as a daemon which will be always receiving information. It needs two arguments:

¹²<http://docs.python.org/2/library/struct.html>

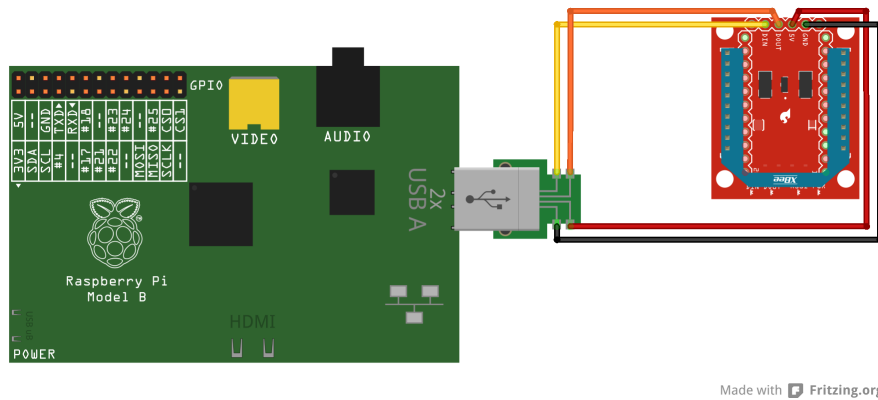


FIGURE 5.9: Schematic of the sink.

- Device file that interfaces with the XBee® (e.g. `/dev/ttyUSB0`). Depending on the devices already attached to the computer the last number might change.
- Baud rate the XBee® is working at (e.g. 9600). Can be customized via X-CTU.

What the script basically does is run an asynchronous **XBee** dispatcher, which will create a new background thread for every new packet that arrives, thus enabling the sink to process many packets at the same time without blocking the whole script. The program is quite modular, since it allows to upload the information to the website the user wants by just uncommenting certain lines. A more detailed view on how it generally works can be seen in figure 5.10.

However, in figure 5.10 we cannot appreciate how packets are actually handled, and what happens to them afterwards. For that matter, figures 5.11 and 5.12 explain these two phases more precisely.

5.3.1 Setting up the sink

5.4 Deploying the network

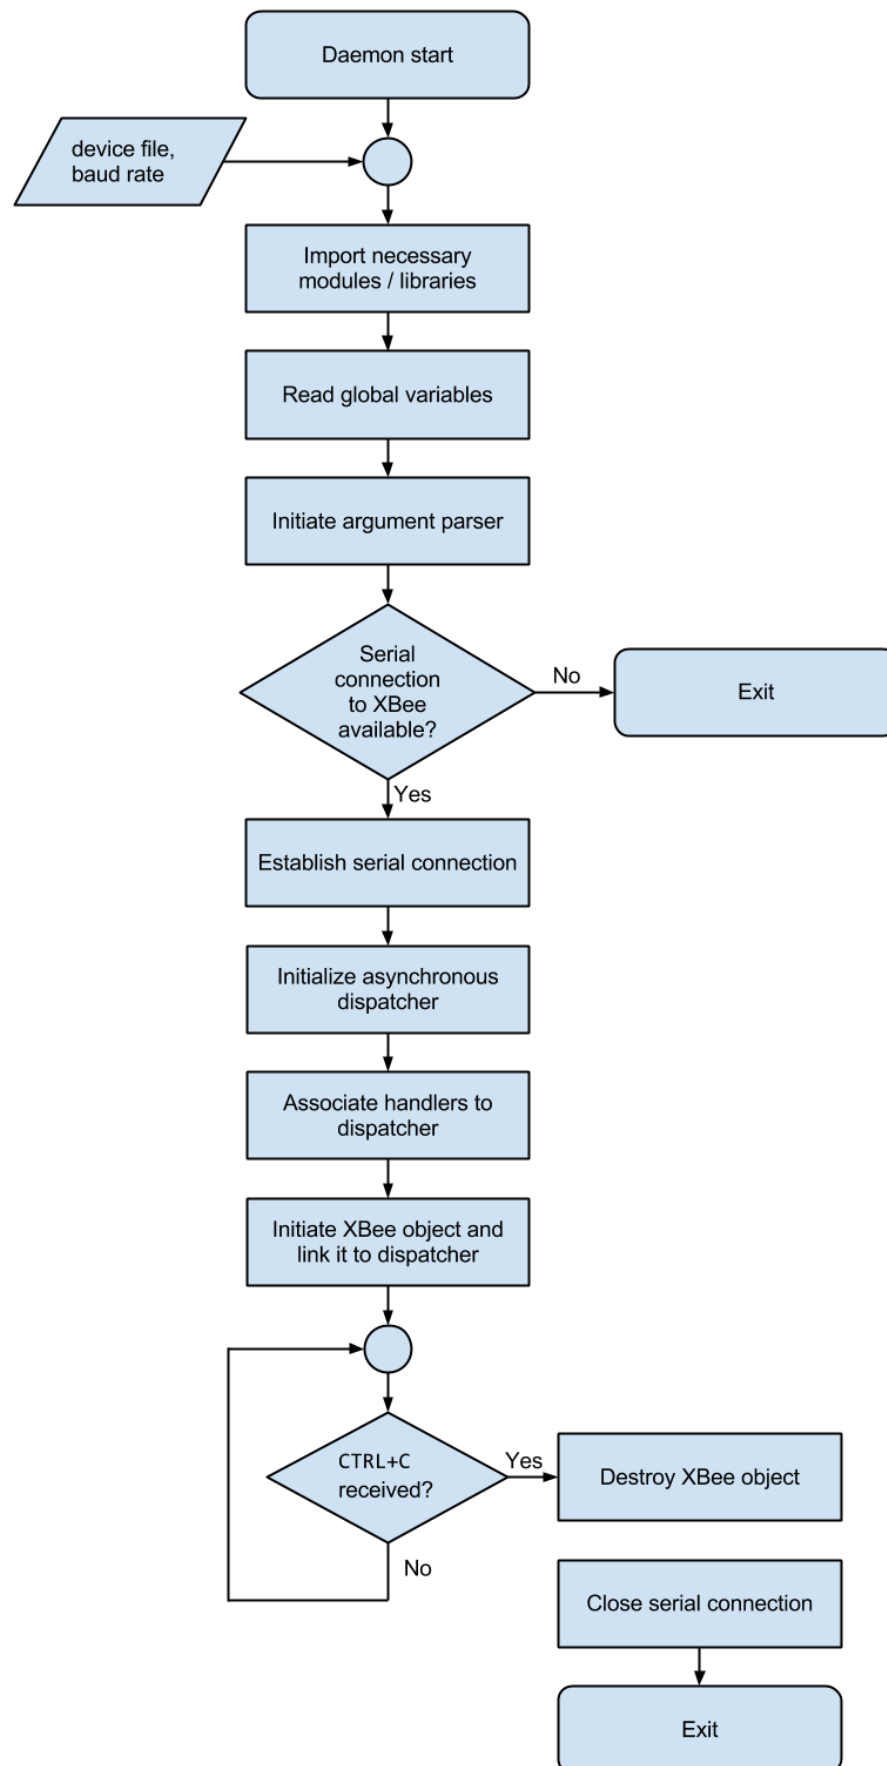


FIGURE 5.10: Flow diagram of the sink script.

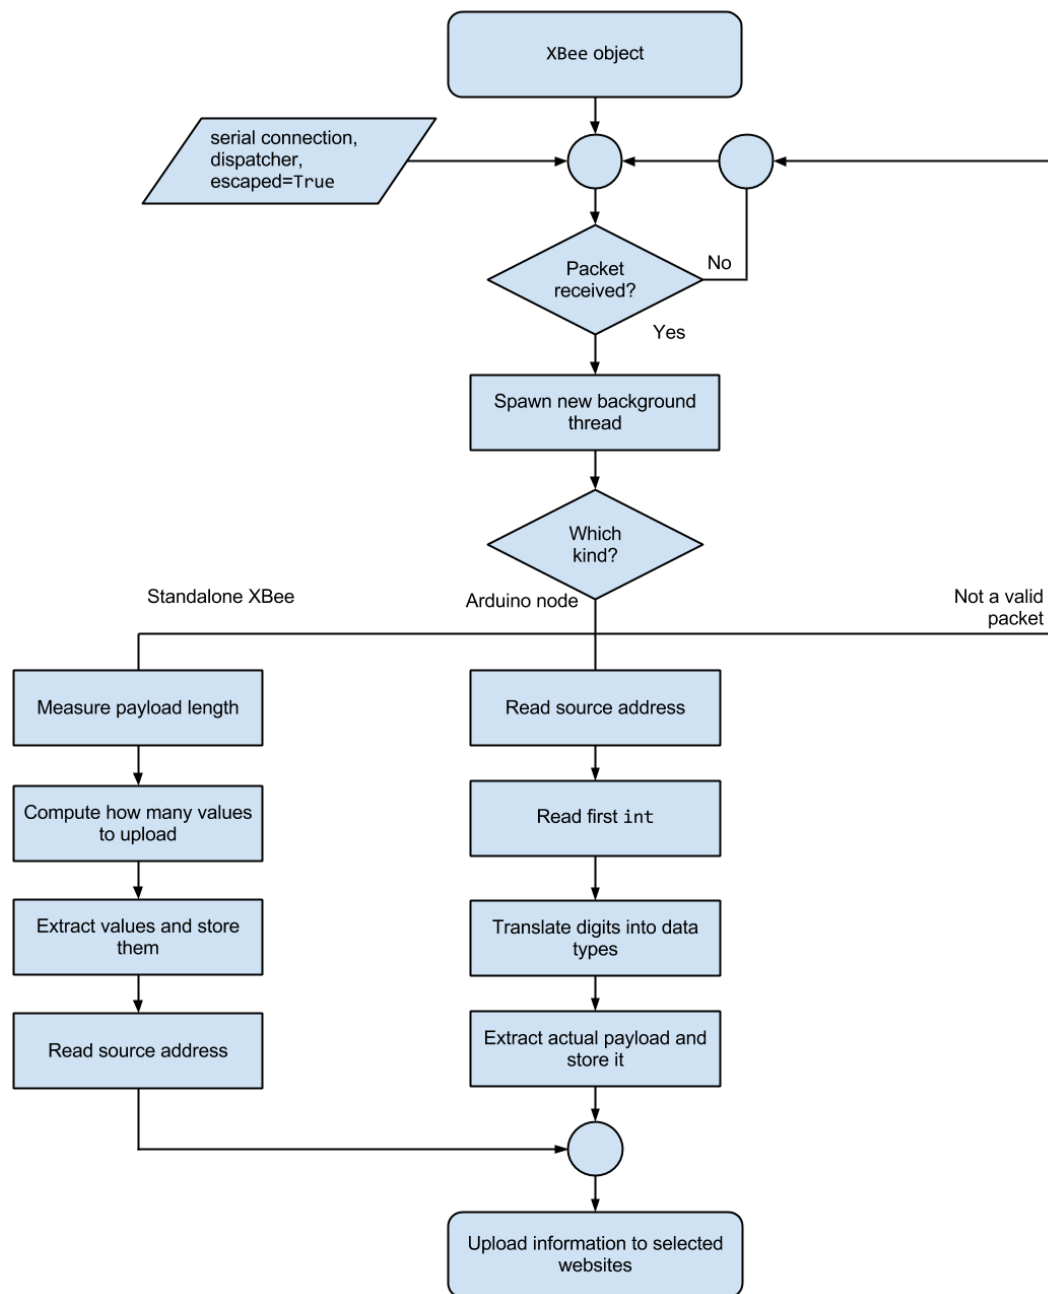


FIGURE 5.11: Flowchart of how packets are dispatched.

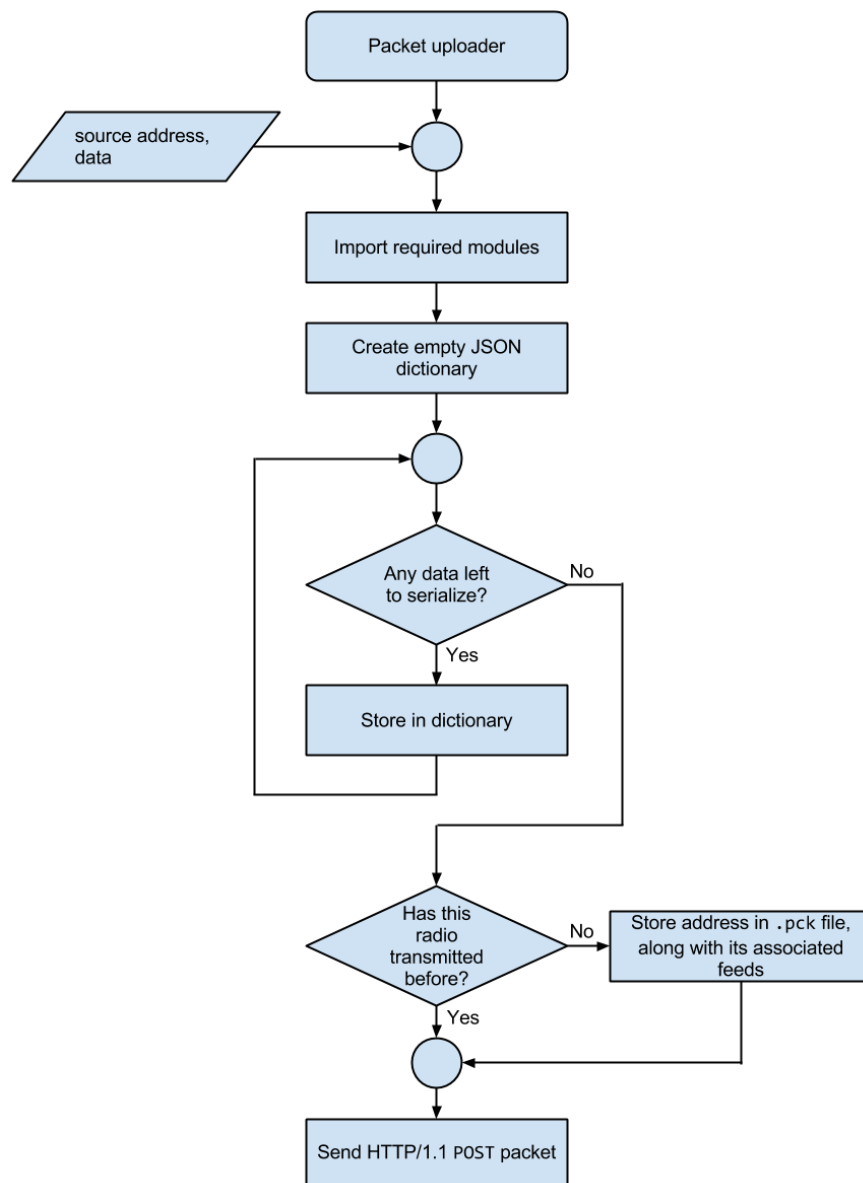


FIGURE 5.12: How a packet uploader works.

Appendix A

Appendix Title Here

Write your Appendix content here.

Bibliography

- [1] Andrea Caragliu, Chiara Del Bo, Peter Nijkamp, et al. *Smart cities in Europe*. Vrije Universiteit, Faculty of Economics and Business Administration, 2009.
- [2] Robert G Hollands. Will the real smart city please stand up? intelligent, progressive or entrepreneurial? *City*, 12(3):303–320, 2008.
- [3] Chee-Yee Chong and Srikanta P Kumar. Sensor networks: evolution, opportunities, and challenges. *Proceedings of the IEEE*, 91(8):1247–1256, 2003.
- [4] Wikipedia. Sensor — wikipedia, the free encyclopedia, 2013. URL <http://en.wikipedia.org/w/index.php?title=Sensor&oldid=548402365>. [Online; accessed 3-April-2013].
- [5] Emily Gertz and Patrick Di Justo. *Environmental Monitoring with Arduino: Building Simple Devices to Collect Data about the World Around Us*. Make, 2012.
- [6] Sharp. Gp2y1010au0f compact optical dust sensor, 2006. URL http://sharp-world.com/products/device/lineup/data/pdf/datasheet/gp2y1010au_e.pdf. [Online; accessed 6-April-2013].
- [7] Chris Nafis. Monitoring your air quality, 2012. URL <http://www.howmuchsnow.com/arduino/airquality/>. [Online; accessed 4-April-2013].
- [8] Digi International. Xbee series 2 oem rf modules, 2007. URL ftp://ftp1.digi.com/support/documentation/90000866_A.pdf. [Online; accessed 6-April-2013].
- [9] Robert Faludi. *Building Wireless Sensor Networks: with ZigBee, XBee, Arduino, and Processing*. O’Reilly Media, Incorporated, 2010.

-
- [10] Project Management Institute. *A Guide to the Project Management Body of Knowledge*. Fourth edition.
 - [11] Y Thomas Hou, Yi Shi, Hanif D Sherali, and Scott F Midkiff. On energy provisioning and relay node placement for wireless sensor networks. *Wireless Communications, IEEE Transactions on*, 4(5):2579–2590, 2005.
 - [12] David Gascon Alberto Bielsa. Wireless sensor networks research group, 2010. URL <http://sensor-networks.org/index.php?page=1010510536>. [Online; accessed 20-May-2013].
 - [13] Digi International. Escaped characters and api mode 2, 2013. URL <http://www.digi.com/support/kbase/kbaseresultdet1?id=2199>. [Online; accessed 4-June-2013].