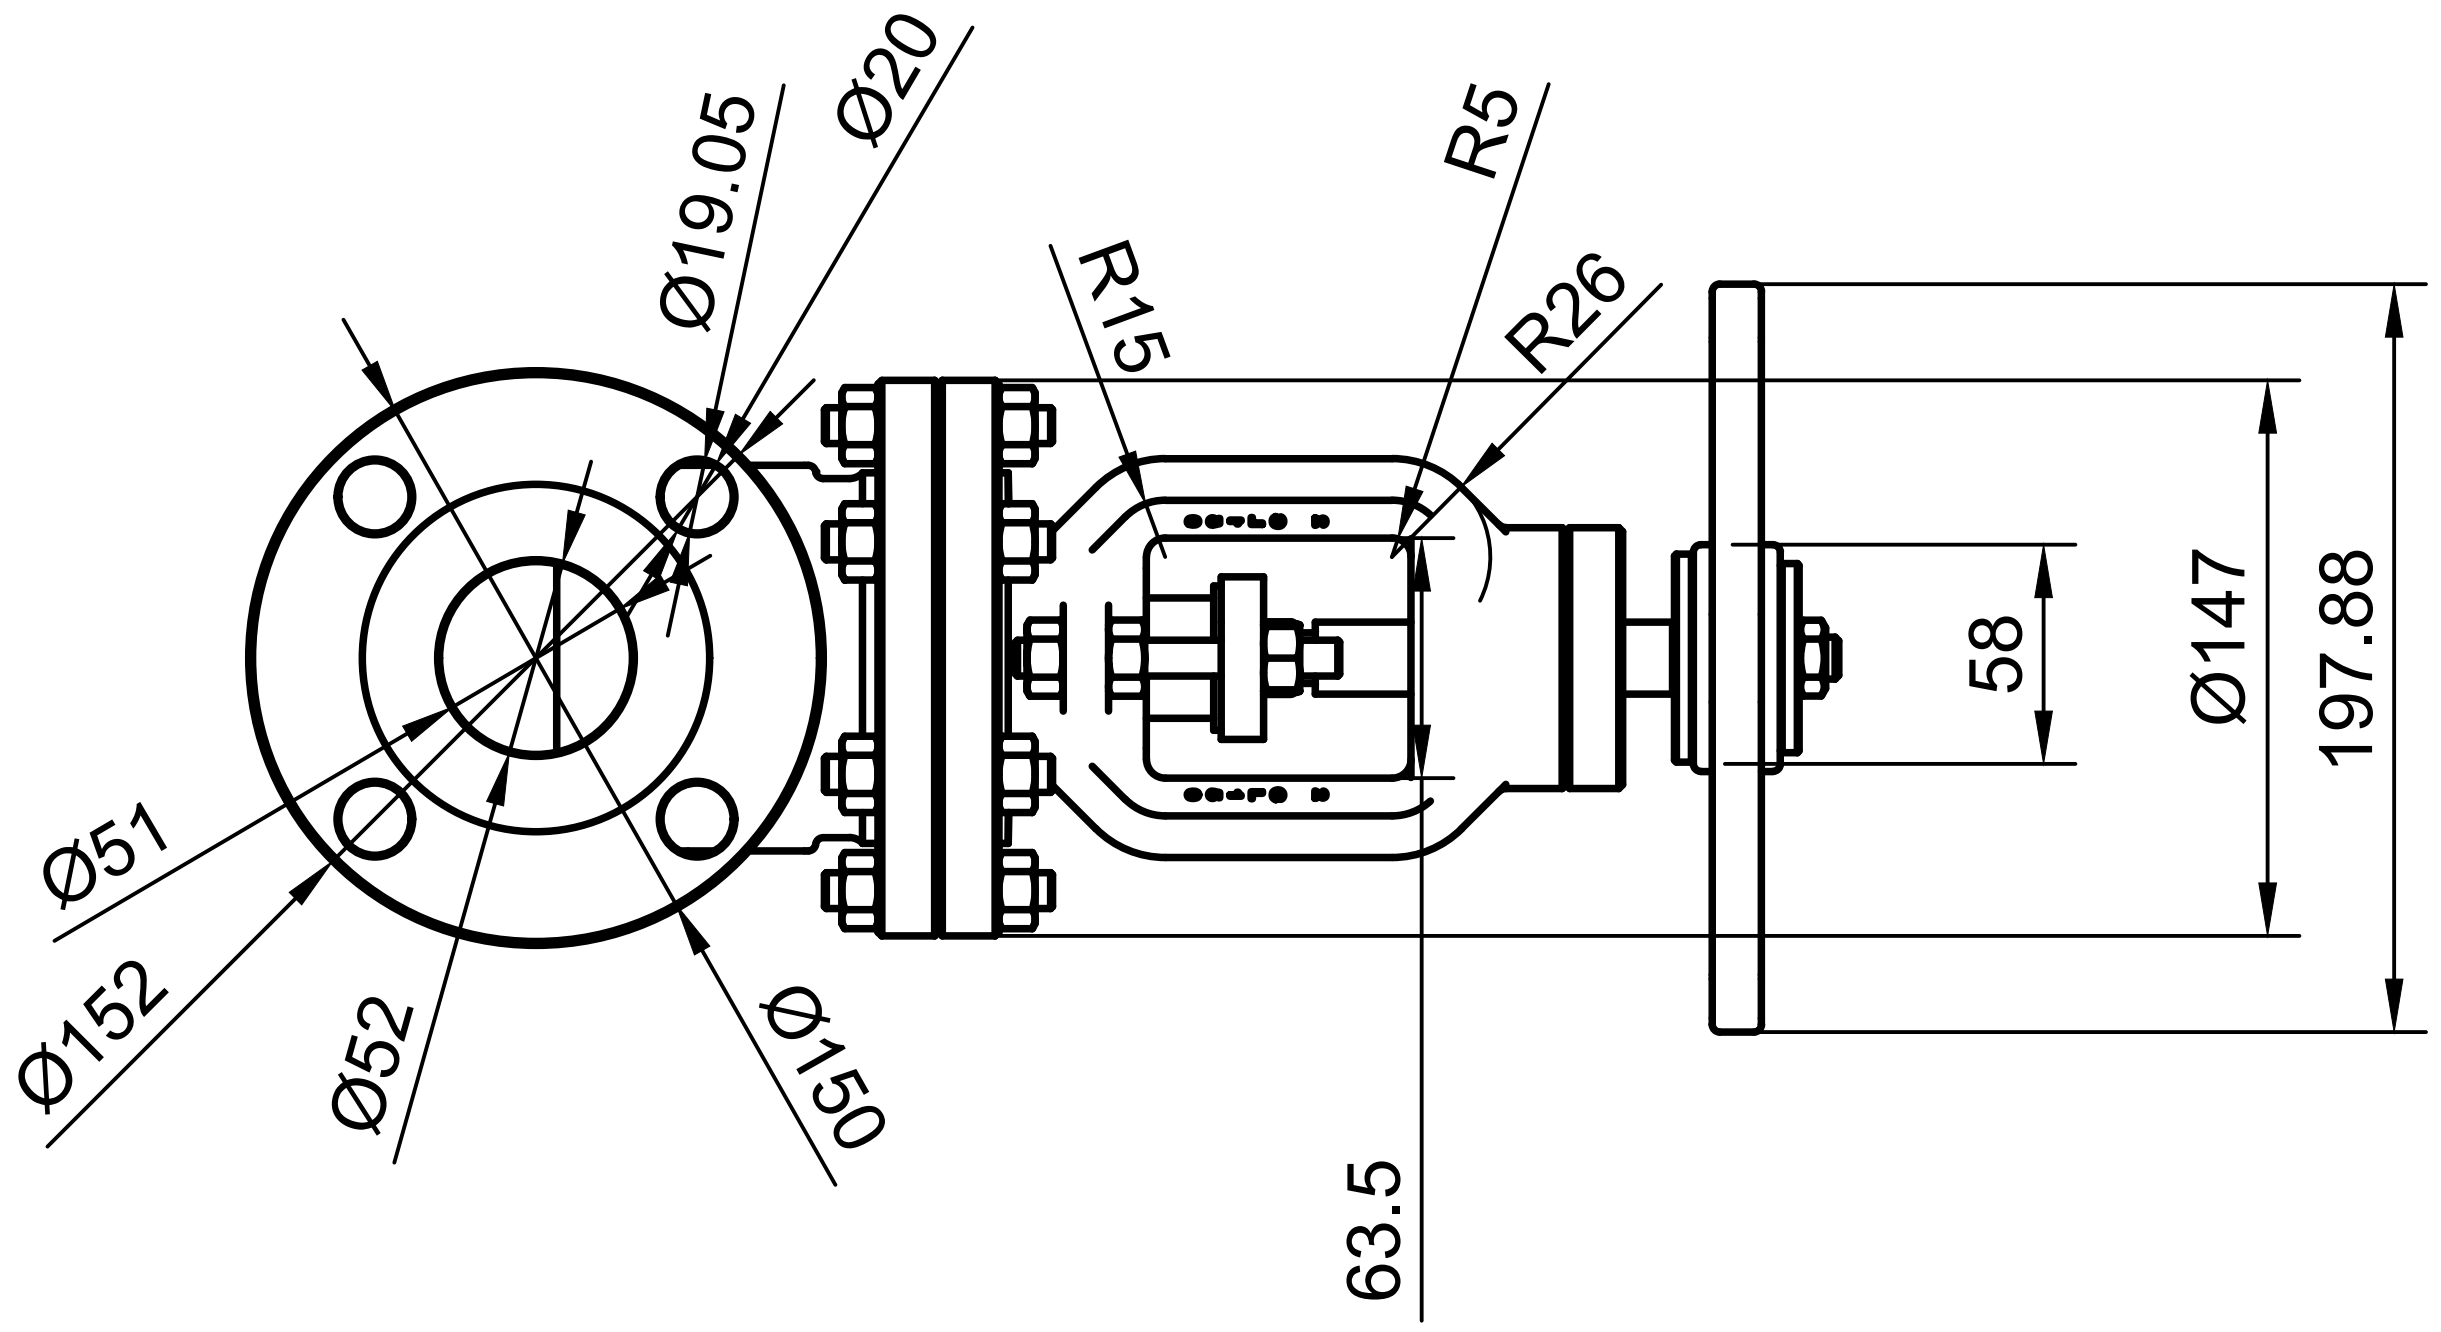

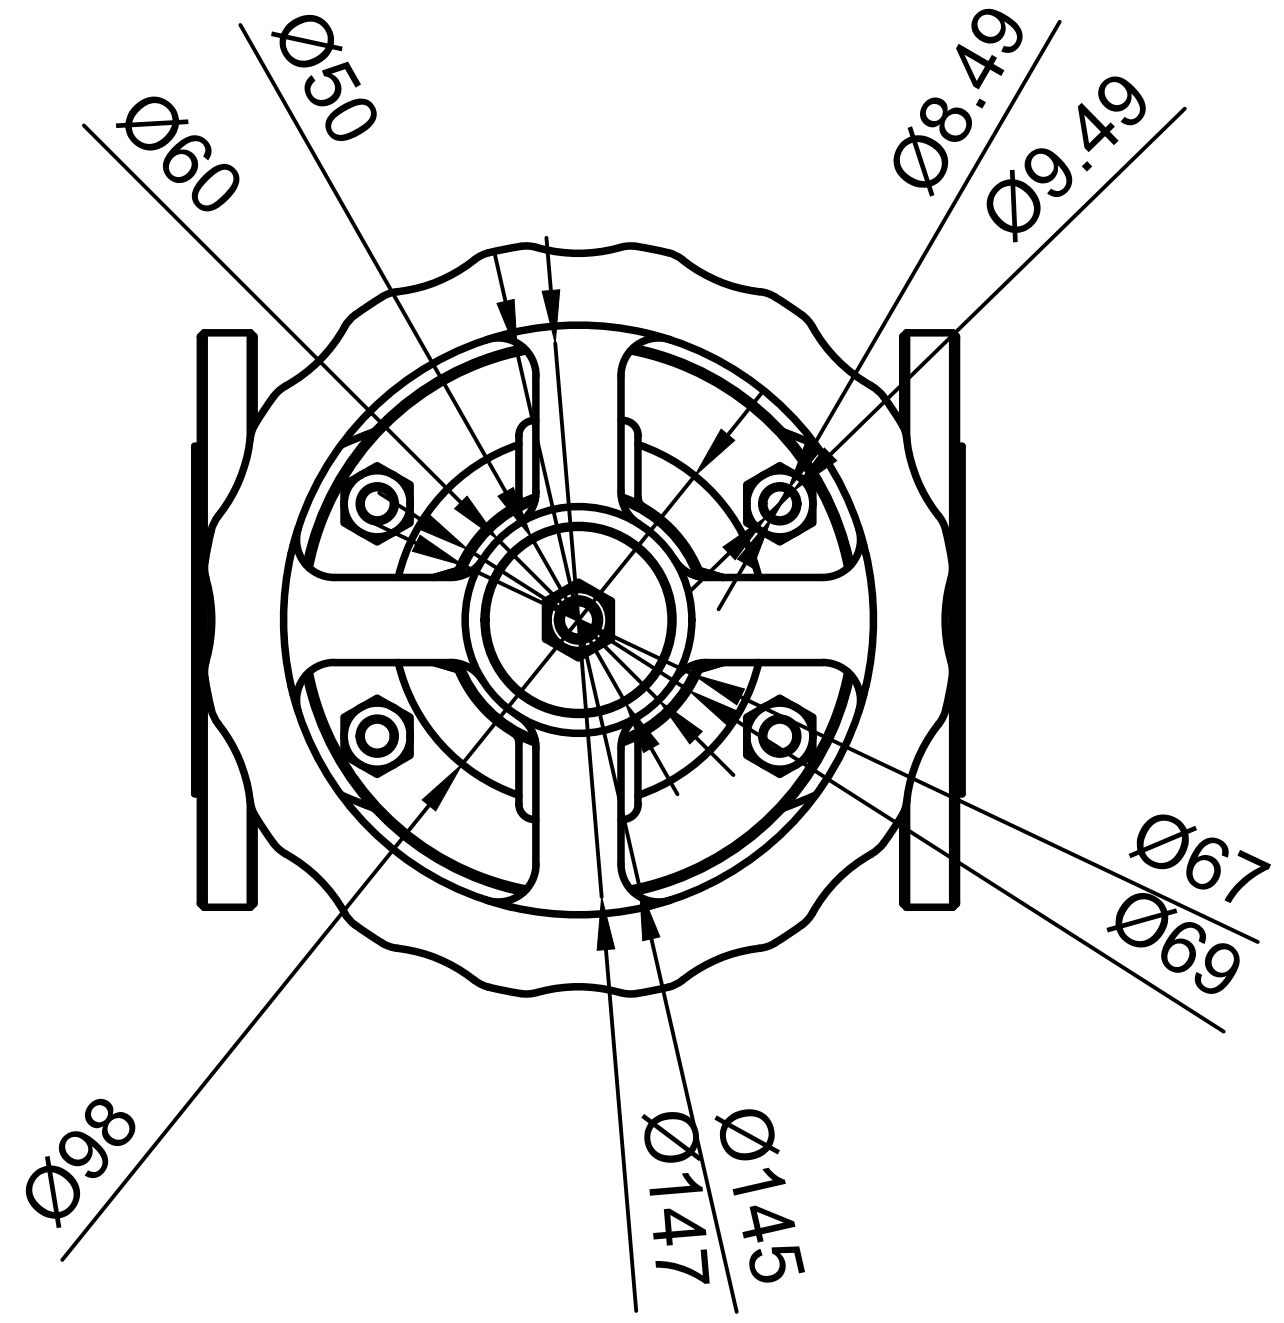

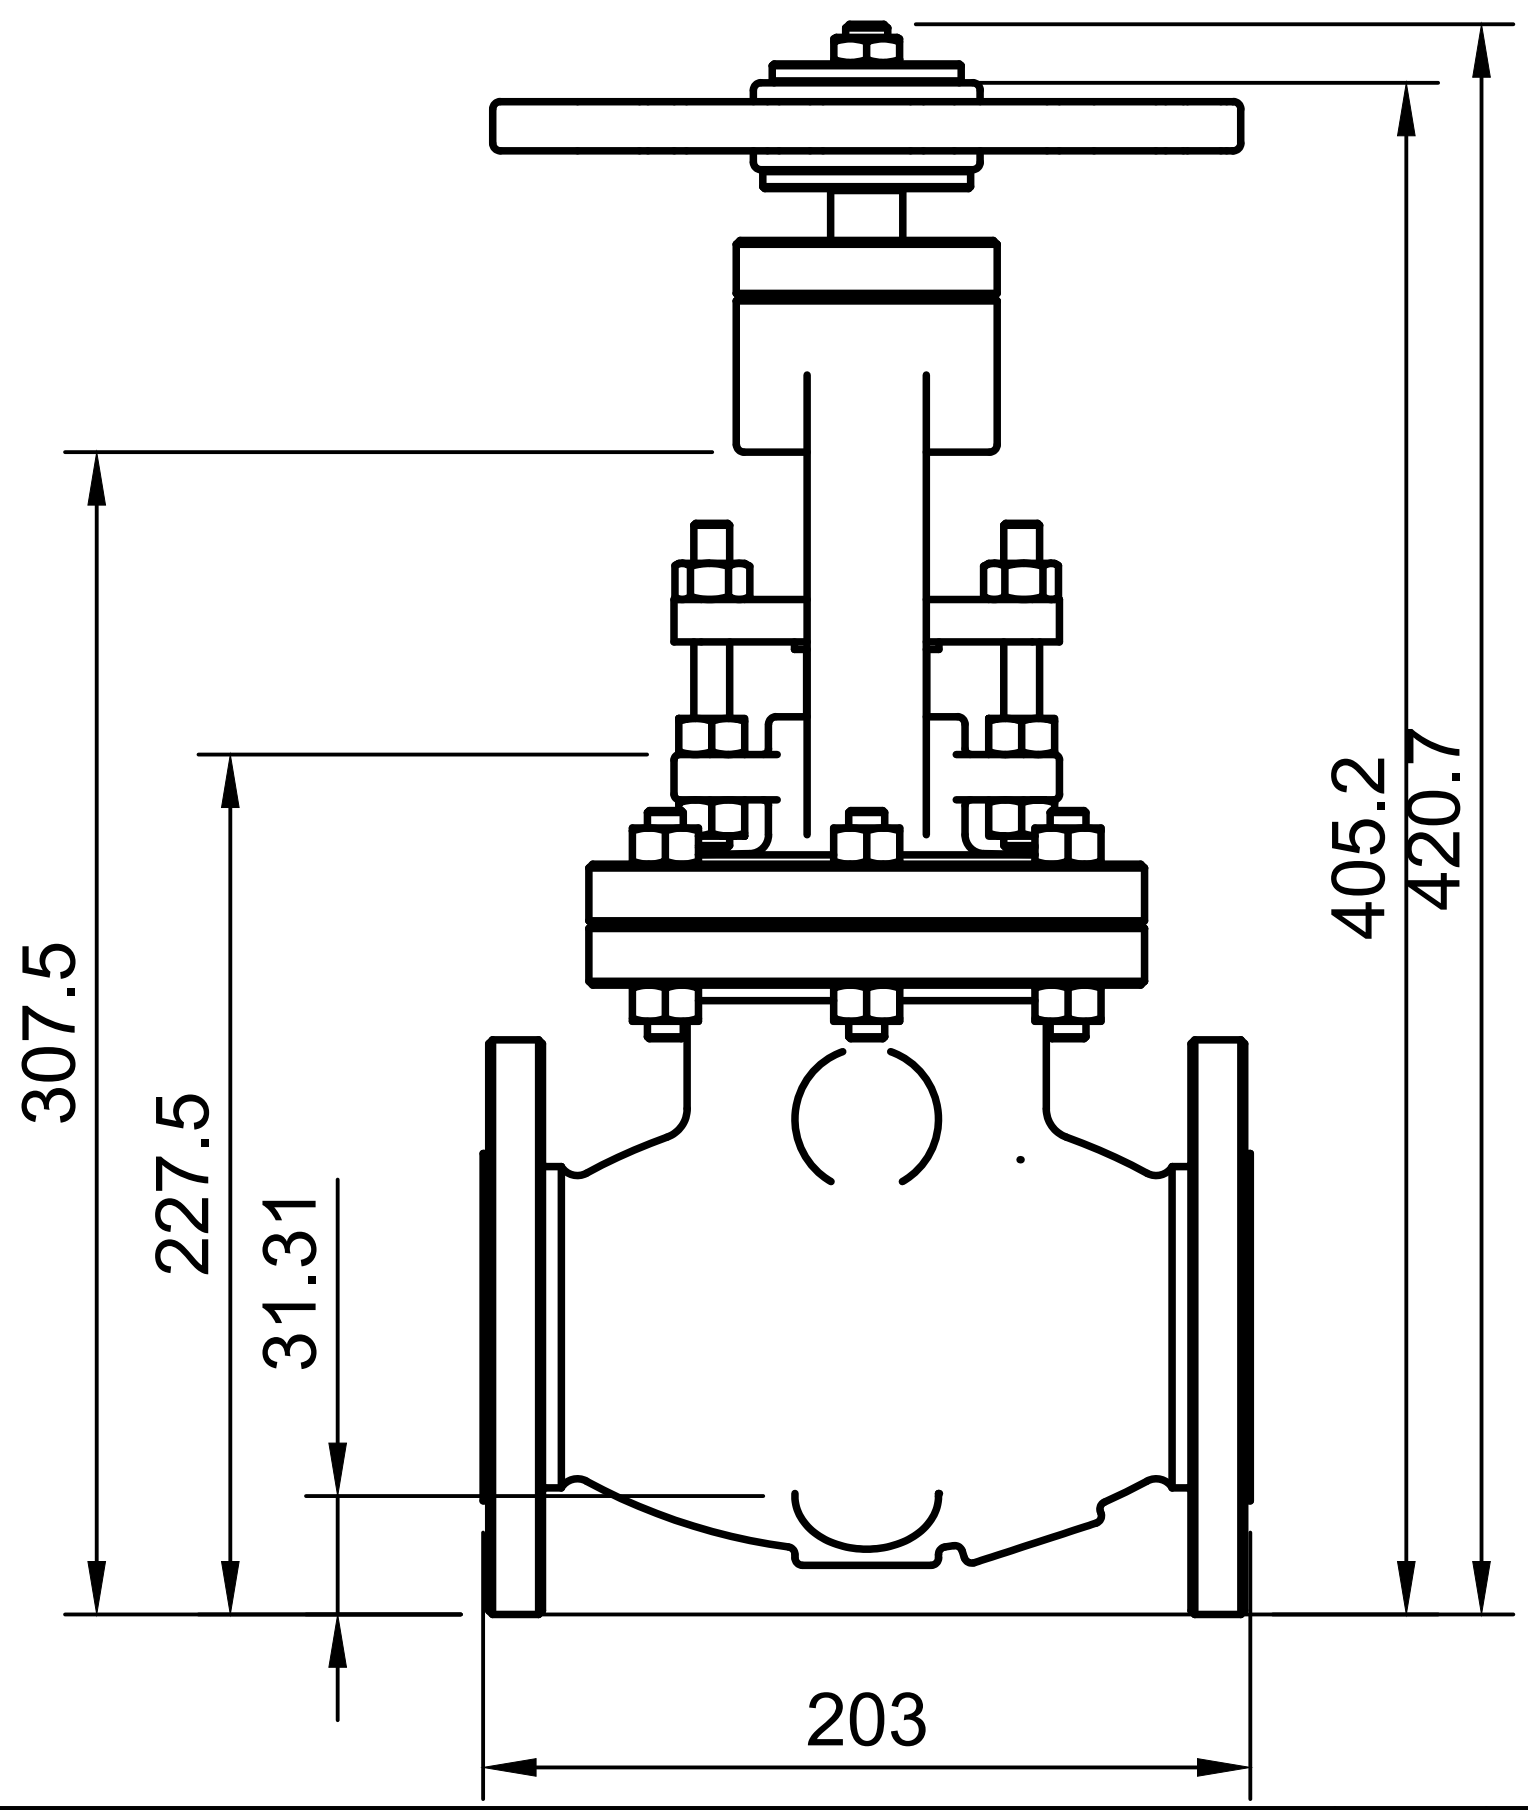

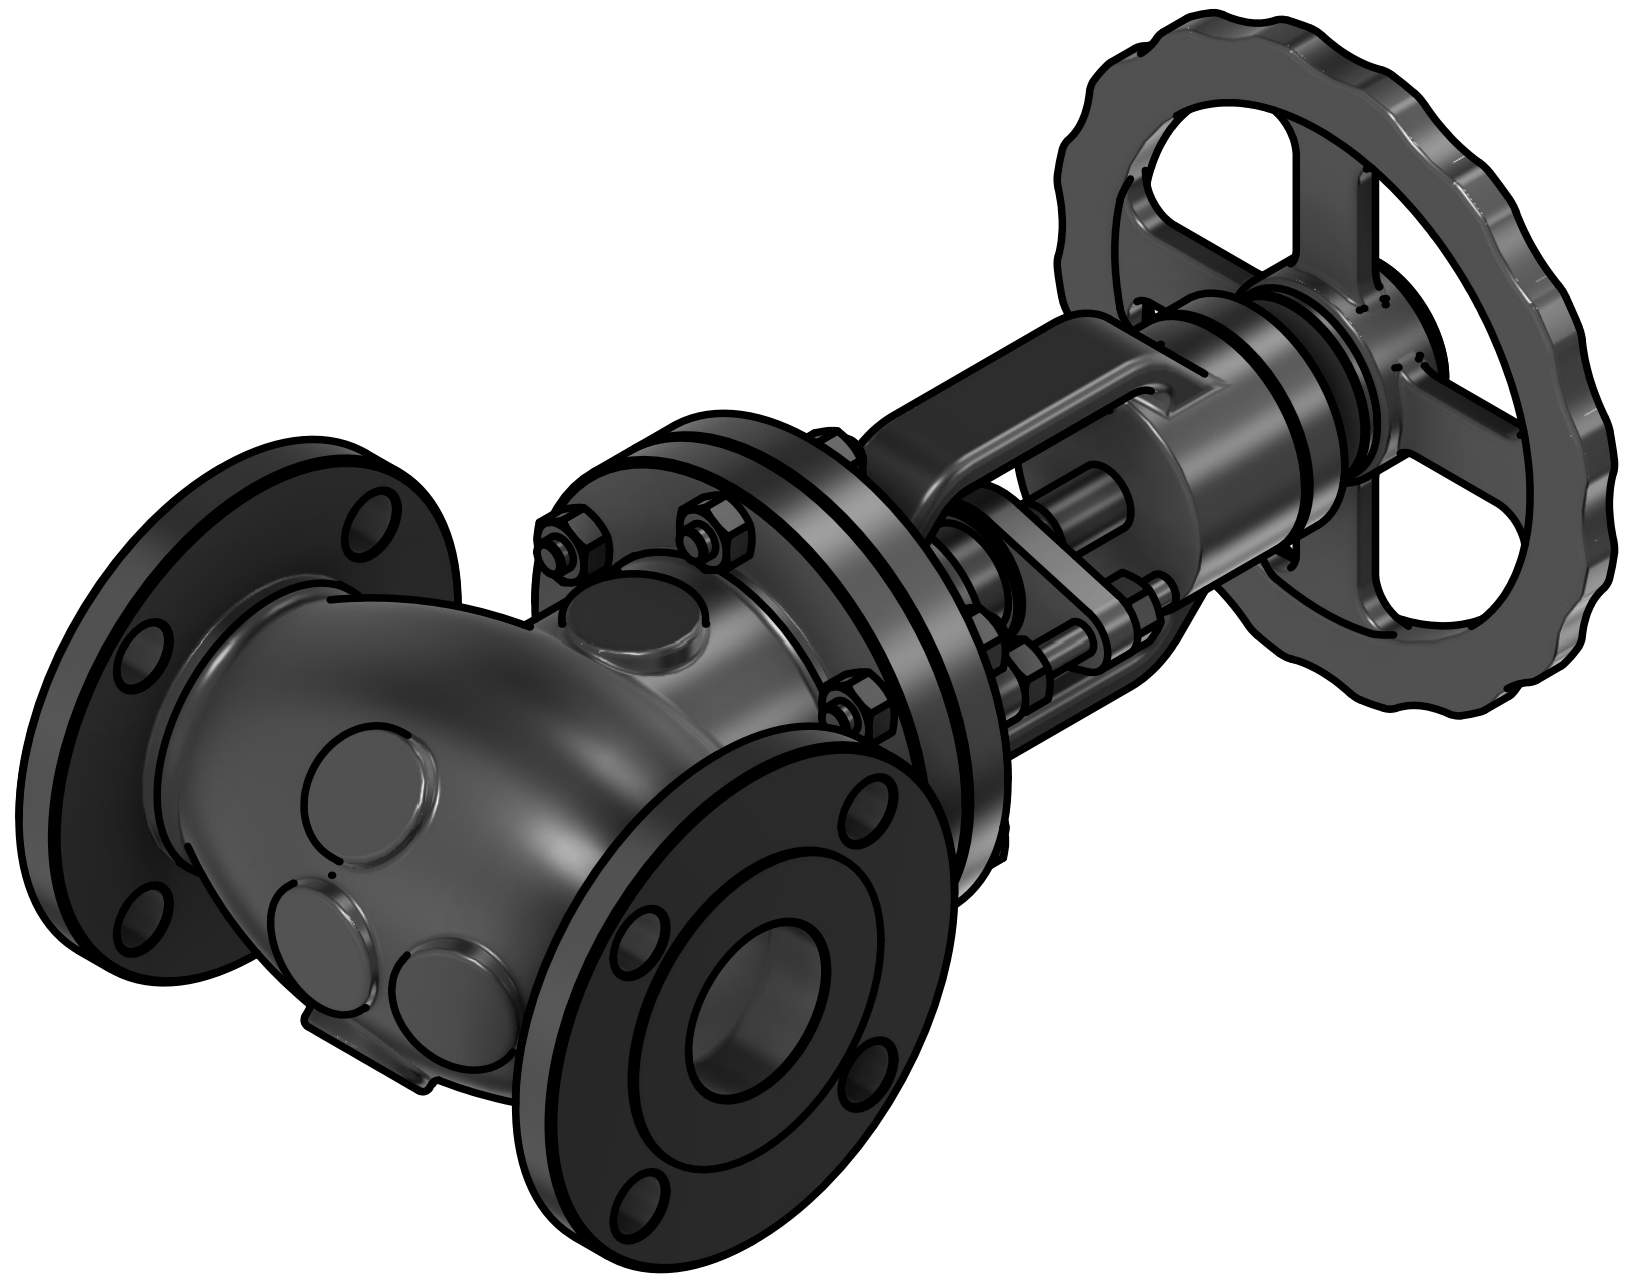

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
1.	Valve Body	1	SS304L	
2.	Bonnet	1	SS304L	
3.	Stem	1	SS304	
4.	Handwheel	1	AL6061	
5.	Disc/Plug	1	SS304L	

GENERAL INSTRUCTIONS

1. ALL DIMENSION ARE IN MM UNLESS SPECIFIED OTHERWISE.
2. ALL BUTT WELD SHALL BE 100% DP TESTED.
3. FLANGE FACING FINISH SHALL BE 125-250 AARH.
4. INSIDE SURFACE & WELDED SURFACE OF THE VENTURI WILL BE SMOOTHLY CLEAN BY VENDOR.
5. DEGREE 37°30' SHALL BE PROVIDED FOR FULL PENETRATION WELD JOINTS.
6. SURFACE FINISH: INSIDE AND OUTSIDE – ACID CLEANED.
7. TRANSPORT: BLANK THE FLANGE OPENING WITH WOODEN SHEET / METAL SHEET.
8. TOLERANCE AS PER STANDARD UNLESS OTHERWISE SPECIFIED.
9. DO NOT SCALE THE DRAWING.
10. REMOVE ALL SHARP CORNERS.
11. MATERIAL DESCRIPTION SIZE PER ASTM/ASME AS APPLICABLE.

REFERENCE STANDARDS

- ASME B16.34 - Valves – Flanged, Threaded and Welding End
- ASME B16.5 - Pipe Flanges and Flanged Fittings
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves
- ASME B16.25 - Butt Welding Ends
- ASME B31.3 - Process Piping Design Code
- ASME Section II Part A - Ferrous Material Specifications
- ASME Section IX - Welding Procedure & Welder Qualification
- ASME BPVC Section V -Non-Destructive Examination (NDT)
- ASME BPVC Section VIII Div.1 - Pressure Vessel Rules
- MSS SP-25 - Standard Marking System for Valves and Fittings

UNNIC LNG SOLUTIONS

Cryogenic Engineering | LNG Consultancy | Maritime & Energy Solutions

Office No. 150, 1st Floor, A Wing, Balaji Bhavan, Plot No. 42A, Sector 11, CBD Belapur, Navi Mumbai – 400614

M : +91 75066 77660
E : info@unniclcs.com
W : www.unnicgroup.com

REV.	DESC.	BY	DATE
0	FINAL DRAFT	SS	

DRAWN BY	SS	
CHECKED BY	MC	
APPROVED BY	MC	

TOLERANCES (Unless Specified)

X	±1.0 mm
X.X	±0.5 mm
X.XX	±0.2 mm
ANGULAR	±1°

FABRICATION: ASME STANDARD

TITLE: MANUAL OPERATED VALVE

DRAWING NO: LNG-BS-MOV-001 **REV.** 0

SHEET	SCALE	UNITS	FORMAT
1 OF 1	1:1	mm	A3