


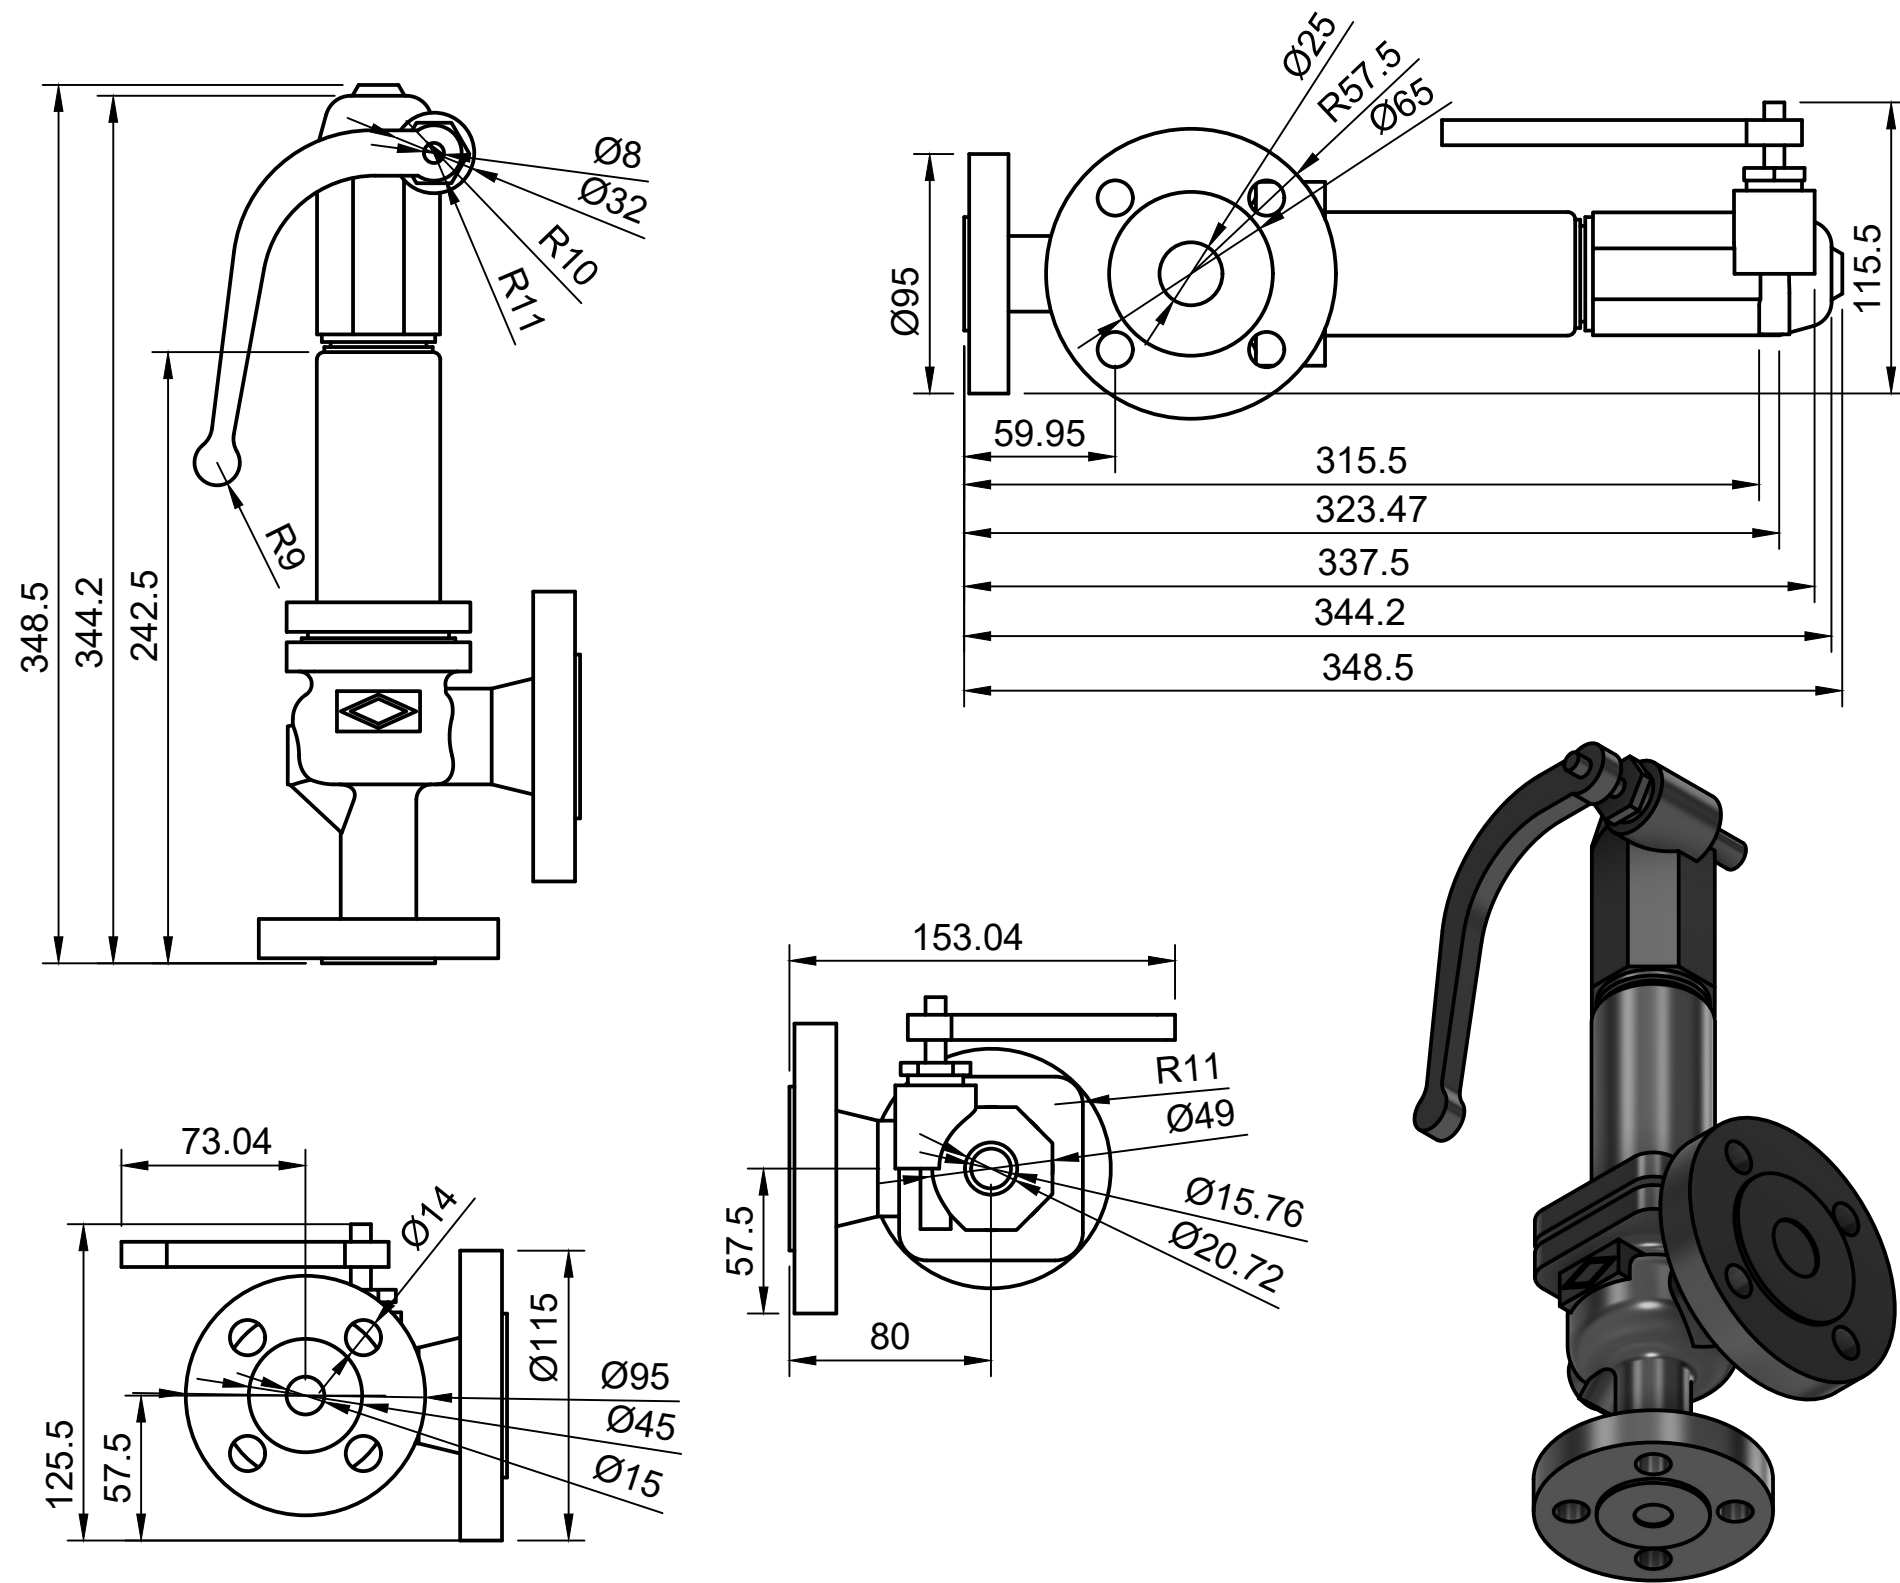

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
1.	Valve Body	1	CF8M	
2.	Bonnet Assembly	1	SS316	
3.	Valve Stem	1	SS316	
4.	Handle Assembly	1	SS304	
5.	Flange Ends	2	A182 F316L	

GENERAL INSTRUCTIONS

- ALL DIMENSION ARE IN MM UNLESS SPECIFIED OTHERWISE.
- ALL BUTT WELD SHALL BE 100% DP TESTED.
- FLANGE FACING FINISH SHALL BE 125-250 AARH.
- INSIDE SURFACE & WELDED SURFACE OF THE VENTURI WILL BE SMOOTHLY CLEAN BY VENDOR.
- DEGREE 37°30' SHALL BE PROVIDED FOR FULL PENETRATION WELD JOINTS.
- SURFACE FINISH: INSIDE AND OUTSIDE – ACID CLEANED.
- TRANSPORT: BLANK THE FLANGE OPENING WITH WOODEN SHEET / METAL SHEET.
- TOLERANCE AS PER STANDARD UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE THE DRAWING.
- REMOVE ALL SHARP CORNERS.
- MATERIAL DESCRIPTION SIZE PER ASTM/ASME AS APPLICABLE.

REFERENCE STANDARDS

- ASME B16.34 - Valves – Flanged, Threaded and Welding End
- ASME B16.5 - Pipe Flanges and Flanged Fittings
- ASME B16.10 - Face-to-Face and End-to-End Dimensions of Valves
- ASME B16.25 - Butt Welding Ends
- API 598 - Valve Inspection and Pressure Testing
- BS 6364 - Specification for Cryogenic Valves
- ASME Section IX - Welding and Welder Qualifications
- ASTM A351 CF8M - Cast Stainless Steel Material Specification
- ASTM A182 F316L - Forged Stainless Steel Flanges and Fittings
- ASME Y14.5 - Dimensioning and Geometric Tolerancing

 UNNIC LNG SOLUTIONS Cryogenic Engineering LNG Consultancy Maritime & Energy Solutions Office No. 150, 1st Floor, A Wing, Balaji Bhavan, Plot No. 42A, Sector 11, CBD Belapur, Navi Mumbai – 400614 M : +91 75066 77660 E : info@unniclcs.com W : www.unnicgroup.com	REV.	DESC.	BY	DATE	DRAWN BY	SS	TOLERANCES (Unless Specified) X ±1.0 mm X.X ±0.5 mm X.XX ±0.2 mm ANGULAR ±1° FABRICATION: ASME STANDARD	TITLE: ANGLE GLOBE VALVE			
0	FINAL DRAFT	SS			CHECKED BY	MC		DRAWING NO: LNG-BS-AGV-005		REV.0	
					APPROVED BY	MC		SHEET	SCALE	UNITS	FORMAT
								1 OF 1	1:1	mm	A3