

Bade Spaces
ke liye,
Badi Cooling
ka Bharosa



unicore®

Purvam Technologies LLP

2nd FLOOR PLOT NO.720, SECTOR-69,
IMT Faridabad, Haryana- 121004

7042526555

GST 06ABJFP0208R1ZX

unicore®

Bade Cooling Ke Liye
Bada Cooler



HIGH AIRFLOW • ENERGY EFFICIENT • HEAVY-DUTY BUILD

CONTENTS

1. About Us	01
2. Farrata Fans	02
3. Wall Fans	06
4. Air Circulator Fans	10
5. Duct Coolers	14
6. Industrial Coolers	22
7. Heavy Duty Exhaust Fans	26
8. Centrifugal Fans	30

ABOUT UNICORE

UNICORE was founded with a singular vision: to manufacture appliances that combine engineering precision with long-term reliability. What started as a small industrial fan manufacturer has grown into a comprehensive solutions provider serving both industrial and residential markets across 50+ countries.

Our commitment to quality has remained unwavering throughout our 25-year journey. Every product that leaves our facility represents decades of accumulated expertise, continuous innovation, and an uncompromising dedication to customer satisfaction.

*Bade Spaces ke liye,
Badi Cooling ka Bharosa*





FARRATA FAN

Range



Higher Air
Delivery



Stay Cool
Motor



Superior
Paint Finish



ZZ Double
Ball Bearing



Powerful
Motor



High Air
Coverage



Thermal
Overload Protector





AIR JET 16"



- | | |
|--|---|
|  FAN TYPE
Pedestal Fans 16" (Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Plastic Blade |  BLADES
3 Leaf |
|  SPEED
2250 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
400 mm |  WATTS
100 W |

EURUS PLUS OSC 18"



- | | |
|--|---|
|  FAN TYPE
Pedestal Fans 18" (Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Aluminum Blade (light weight) |  BLADES
3 Leaf |
|  SPEED
1380 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
450 mm |  WATTS
120 W |

SUPER STAR 20"



- | | |
|---|---|
|  FAN TYPE
Pedestal Fans 20" (Non- Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Aluminum Blade (light weight) |  BLADES
3 Leaf |
|  SPEED
1380 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
500 mm |  WATTS
145 W |



WALL FAN

Range



Higher Air
Delivery



Stay Cool
Motor



Superior
Paint Finish



ZZ Double
Ball Bearing



Powerful
Motor



High Air
Coverage



Thermal
Overload Protector





METAWING 16" WALL



- | | |
|--|---|
|  FAN TYPE
Wall Fans 16" (Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Aluminum Blade (light weight) |  BLADES
3 Leaf |
|  SPEED
1350 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
400 mm |  WATTS
65 W |

EURUS 18" WALL



- | | |
|---|---|
|  FAN TYPE
Wall Fans 18" (Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Aluminum Blade (light weight) |  BLADES
3 Leaf |
|  SPEED
1380 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
450 mm |  WATTS
120 W |

SUPER STAR 20" WALL



- | | |
|--|---|
|  FAN TYPE
Wall Fans 20" (Oscillating) |  USAGE
Domestic/Commercial |
|  BLADE MATERIAL
Aluminum Blade (light weight) |  BLADES
3 Leaf |
|  SPEED
1380 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
500 mm |  WATTS
145 W |



AIR CIRCULATOR

Range



Higher Air
Delivery



Stay Cool
Motor



Superior
Paint Finish



ZZ Double
Ball Bearing



Powerful
Motor



High Air
Coverage



AEROTHRUST 450 MM PEDESTAL (18")



- FAN TYPE
Pedestal Fans 18" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
450 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
150 W

AEROTHRUST 600 MM PEDESTAL (24")



- FAN TYPE
Pedestal Fans 24" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
600 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
200 W

AEROTHRUST 750 MM PEDESTAL (30")



- FAN TYPE
Pedestal Fans 24" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
750 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
260 W

AEROTHRUST 450 MM WALL (18")



- FAN TYPE
Wall Fans 18" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
450 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
150 W

AEROTHRUST 600 MM WALL (24")



- FAN TYPE
Wall Fans 24" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
600 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
200 W

AEROTHRUST 750 MM WALL (30")



- FAN TYPE
Wall Fans 24" (Oscillating)

BLADE MATERIAL
Aluminum Casted Blade

SPEED
1400 RPM

SWEEP
750 mm
- USAGE
Industrial

BLADES
3 Leaf

POWER REQUIREMENT
AC 220 – 240 V, 50 Hz

WATTS
260 W



DUCT COOLERS

Range



24" Axial Fan



100% Virgin UV Resistant Grade Plastic



Swivel Lowers



Industrial Grade Heavy Cord



Heavy Duty Castor Wheels



Anti Bacterial Honeycomb Pads



Fitted with Uniflow Copper Pump



Large water Tank Capacity

GO COOL Series

GO COOL 800



- AIR DISCHARGE**
Top Discharge Only- With Single, Double and Multi Flow Ducts
- CONTROL SYSTEM**
Manual Speed Controller
- MAXIMUM AIRFLOW**
12000 m³/h
- RATED POWER**
800 W
- MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- BODY MATERIAL**
Virgin PP
- FAN TYPE**
3 Blade Axial Fan
- WATER TANK CAPACITY**
100 Ltrs
- NET WEIGHT**
62 Kg
- MACHINE DIMENSION**
890L x 890W x 1800H (mm)

GO COOL 1100



- AIR DISCHARGE**
Top Discharge Only- With Single, Double and Multi Flow Ducts
- CONTROL SYSTEM**
Manual Speed Controller
- MAXIMUM AIRFLOW**
18000 m³/h
- RATED POWER**
1100 W
- MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- BODY MATERIAL**
Virgin PP
- FAN TYPE**
3 Blade Axial Fan
- WATER TANK CAPACITY**
200 Ltrs
- NET WEIGHT**
78 Kg
- AIR OUTLET SIZE**
670 X 670 mm
- MACHINE DIMENSION**
1080L x 1080W x 1920H (mm)

VENT PRO Series

Vent pro 1100



- AIR DISCHARGE**
Top / Side Discharge
- CONTROL SYSTEM**
3 Speed Controller
- MAXIMUM AIRFLOW**
18000 m³/h
- RATED POWER**
1100 W
- MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- BODY MATERIAL**
Virgin PP
- FAN TYPE**
3 Blade Axial Fan
- WATER TANK CAPACITY**
35 ltrs
- NET WEIGHT**
58 Kg
- MACHINE DIMENSION**
1080L x 1080W x 920H mm

Vent pro 1100i



- AIR DISCHARGE**
Top / Side Discharge
- CONTROL SYSTEM**
12 Speed , 1.1 Kw frequency converter with remote controller
- MAXIMUM AIRFLOW**
18000 m³/h
- RATED POWER**
1100 W
- MOTOR TYPE/PH**
100% Cu Motor, 3 Ph, 420 W
- BODY MATERIAL**
Virgin PP
- FAN TYPE**
9 Blade Axial Fan
- WATER TANK CAPACITY**
35 ltrs
- NET WEIGHT**
58 Kg
- MACHINE DIMENSION**
1080L x 1080W x 920H mm

ADD ONS

- Available with Auto Drain Pump
- Available with Reverse Rotation for Ventilation
- Available with 9 speed Options

Vent pro 1500



- **AIR DISCHARGE**
Top Discharge
- **CONTROL SYSTEM**
3 Speed Controller
- **MAXIMUM AIRFLOW**
23000 m³/h
- **RATED POWER**
1500 W
- **MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
4 Blade Axial Fan
- **WATER TANK CAPACITY**
35 ltrs
- **NET WEIGHT**
70 Kg
- **MACHINE DIMENSION**
1080L x 1080W x 1120H (mm)

Vent pro 1500i



- **AIR DISCHARGE**
Top Discharge
- **CONTROL SYSTEM**
12 Speed , 1.5 Kw frequency converter with remote controller
- **MAXIMUM AIRFLOW**
23000 m³/h
- **RATED POWER**
1500 W
- **MOTOR TYPE/PH**
100% Cu Motor, 3 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
9 Blade Axial Fan
- **WATER TANK CAPACITY**
35 ltrs
- **NET WEIGHT**
70 Kg
- **MACHINE DIMENSION**
1080L x 1080W x 1120H (mm)

Vent pro 2200



- **AIR DISCHARGE**
Top Discharge
- **CONTROL SYSTEM**
3 Speed Controller
- **MAXIMUM AIRFLOW**
26000 m³/h
- **RATED POWER**
2200 W
- **MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
4 Blade Axial Fan
- **WATER TANK CAPACITY**
35 ltrs
- **NET WEIGHT**
70 Kg
- **MACHINE DIMENSION**
1080L x 1080W x 1120H (mm)

Vent pro 2200i



- **AIR DISCHARGE**
Top Discharge
- **CONTROL SYSTEM**
12 Speed , 2.2 Kw frequency converter with remote controller
- **MAXIMUM AIRFLOW**
25000 m³/h
- **RATED POWER**
2200 W
- **MOTOR TYPE/PH**
100% Cu Motor, 3 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
9 Blade Axial Fan
- **WATER TANK CAPACITY**
35 ltrs
- **NET WEIGHT**
70 Kg
- **MACHINE DIMENSION**
1080L x 1080W x 1120H (mm)

Vent pro 3000



- **AIR DISCHARGE**
Top Side Discharge
- **CONTROL SYSTEM**
3 Speed Controller
- **MAXIMUM AIRFLOW**
30000 m³/h
- **RATED POWER**
3000 W
- **MOTOR TYPE/PH**
100% Cu Motor, 1 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
4 Blade Axial Fan
- **WATER TANK CAPACITY**
70 ltrs
- **NET WEIGHT**
96 Kg
- **MACHINE DIMENSION**
1300L x 1300W x 1180H (mm)

Vent pro 3000i



- **AIR DISCHARGE**
Top Discharge
- **CONTROL SYSTEM**
12 Speed , 3.0 Kw frequency converter with remote controller
- **MAXIMUM AIRFLOW**
30000 m³/h
- **RATED POWER**
3000 W
- **MOTOR TYPE/PH**
100% Cu Motor, 3 Ph, 420 W
- **BODY MATERIAL**
Virgin PP
- **FAN TYPE**
9 Blade Axial Fan
- **WATER TANK CAPACITY**
70 ltrs
- **NET WEIGHT**
96 Kg
- **MACHINE DIMENSION**
1300L x 1300W x 1180H (mm)



INDUSTRIAL COOLERS

Range



30" Fan Powerful
Air Delivery



Premium Matte
Finish-Sturdy Body



Water Level
Indicators



Comfort
Cooling



Heavy Duty
Castor Wheels



Anti Bacterial
Cooling Honeycomb



Fitted with
Uniflow Copper Pump



Easy
Drain





AirMaxx



-  **FAN TYPE**
19" Centrifugal blade, 4 leaf
-  **MOTOR TYPE/PH**
Cu Motor
-  **AIRFLOW**
4800 m³/h
-  **MACHINE DIMENSION**
880L x 630W x 1480H (mm)
-  **WATER TANK CAPACITY**
120 ltrs

- KEY FEATURES**
-  19" Fan - Powerful Air Delivery
-  Heavy Duty Castor Wheels
-  Comfort Cooling
-  Easy Drain
-  Anti Rust Virgin - Sturdy Body
-  Water Level Indicator
-  Low Noise

CoolBreeze



-  **FAN TYPE**
20" Centrifugal blade, 4 leaf
-  **MOTOR TYPE/PH**
Al Motor
-  **AIR THROW**
60 ft.
-  **MACHINE DIMENSION**
825L x 596W x 1370H (mm)
-  **WATER TANK CAPACITY**
135 ltrs


- KEY FEATURES**
-  20" Fan - Powerful Air Delivery
-  Heavy Duty Castor Wheels
-  Comfort Cooling
-  Easy Drain
-  3 Side Anti Bacterial Cooling Media - Honeycomb Pads
-  Water Level Indicator
-  Low Noise
-  Fitted With Uniflow Pump

Glacier



-  **FAN TYPE**
30" Centrifugal blade, 4 leaf
-  **MOTOR TYPE/PH**
Al Motor
-  **AIRFLOW**
18500 m³/h
-  **MACHINE DIMENSION**
1140L x 745W x 1840H (mm)
-  **WATER TANK CAPACITY**
200 ltrs

- KEY FEATURES**
-  30" Fan - Powerful Air Delivery
-  Heavy Duty Castor Wheels
-  Comfort Cooling
-  Easy Drain
-  Anti Bacterial Cooling Media - Honeycomb Pads
-  Water Level Indicator
-  Low Noise
-  Fitted With Uniflow Pump
-  Premium Matte Finish - Sturdy Body

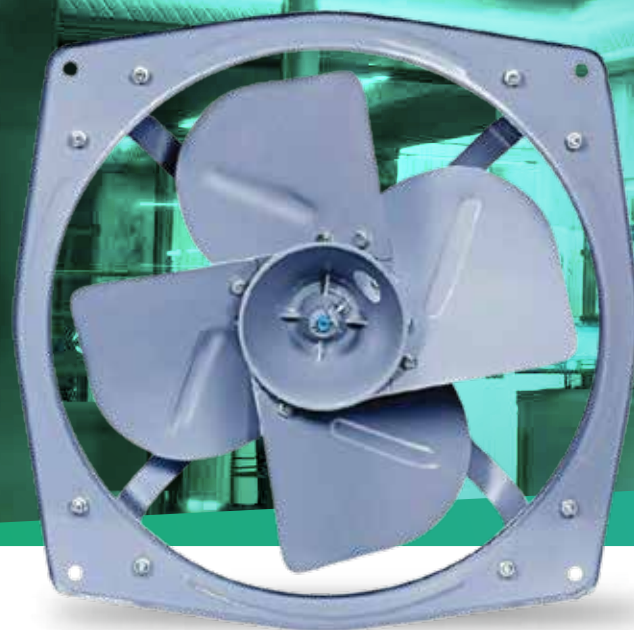

Heavy Duty EXHAUST FAN

Range



Higher Air
Delivery



Stay Cool
Motor



Superior
Paint Finish



ZZ Double
Ball Bearing



Powerful
Motor



High Air
Coverage



Thermal
Overload Protector



PURE Air HDEF-12"



- | | |
|--|--|
|  FAN TYPE
(Aluminum Body- Bearing Type) |  USAGE
Commercial/Industrial |
|  BLADE MATERIAL
MS Sheet (With Aluminum Hub) |  BLADES
4 Leaf |
|  SPEED
1400 RPM |  POWER REQUIREMENT
AC 220 – 240 V, 50 Hz |
|  SWEEP
300 mm |  WATTS
90 W |

PURE Air HDEF-15"



- | | |
|--|--|
|  FAN TYPE
(Aluminum Body- Bearing Type) |  USAGE
Commercial/Industrial |
|  BLADE MATERIAL
MS Sheet (With Aluminum Hub) |  BLADES
4 Leaf |
|  SPEED
1400 RPM |  POWER REQUIREMENT
AC 220 – 240 V, 50 Hz |
|  SWEEP
380 mm |  WATTS
145 W |



PURE Air HDEF - 18"



- | | |
|--|--|
|  FAN TYPE
(Aluminum Body- Bearing Type) |  USAGE
Commercial/Industrial |
|  BLADE MATERIAL
MS Sheet (With Aluminum Hub) |  BLADES
4 Leaf |
|  SPEED
1360 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
450 mm |  WATTS
350 W |

PURE Air HDEF-24"



- | | |
|--|--|
|  FAN TYPE
(Aluminum Body- Bearing Type) |  USAGE
Commercial/Industrial |
|  BLADE MATERIAL
MS Sheet (With Aluminum Hub) |  BLADES
4 Leaf |
|  SPEED
900 RPM |  POWER REQUIREMENT
AC 230 V, 50 Hz |
|  SWEEP
600 mm |  WATTS
600 W |



Heavy Duty

CENTRIFUGAL FAN

Range



Higher Air
Delivery



Stay Cool
Motor



Superior
Paint Finish



ZZ Double
Ball Bearing



Powerful
Motor



High Air
Coverage



Thermal
Overload Protector



SCF 43"



- BODY MATERIAL
Galvanized Iron(GI)
- BLADE MATERIAL
Stainless Steel
- MOTOR RPM
1400 RPM
- BLADE RPM
440 RPM
- AIR FLOW (M³/H)
27000
- POWER PHASE (PH)
0.56 Kw , 3 Ph
- PRODUCT DIMENSION
1066H x 1066W x 450D

SCF 54"



- BODY MATERIAL
Galvanized Iron(GI)
- BLADE MATERIAL
Stainless Steel
- MOTOR RPM
1400 RPM
- BLADE RPM
455 RPM
- AIR FLOW (M³/H)
44000
- POWER PHASE (PH)
1.1 Kw , 3 Ph.
- PRODUCT DIMENSION
1380H x 1380W x 450D

PCF 54"



- BODY MATERIAL
Galvanized Iron(GI)
- BLADE MATERIAL
Heavy DutyPlastic
- MOTOR RPM
1400 RPM
- BLADE RPM
630 RPM
- AIR FLOW (M³/H)
27000
- POWER PHASE (PH)
1.1 Kw , 3 Ph.
- PRODUCT DIMENSION
1380H x 1380W x 450D



unicôre®