

Image text-base: 0x2100F915, data-base: 0x24729040

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at: <http://www.cisco.com/wml/export/crypto/steqs.html>

If you require further assistance please contact us by sending email to export@cisco.com.

Cisco CISC02911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400K5
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
256M bytes of non-volatile configuration memory.
249956K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.

Would you like to enter the initial configuration dialog? [yes/no]: no


Press RETURN to get started!

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
wait
Router(config)#ip dhcp pool LAN_POOL
Router(dhcp-config)#network 192.168.1.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.1.1
Router(dhcp-config)#exit
Router(config)#NOHCPCD-4-FIND_CONFLICT: DHCP address conflict: server pinged 192.168.1.1.
```

Copy

Paste

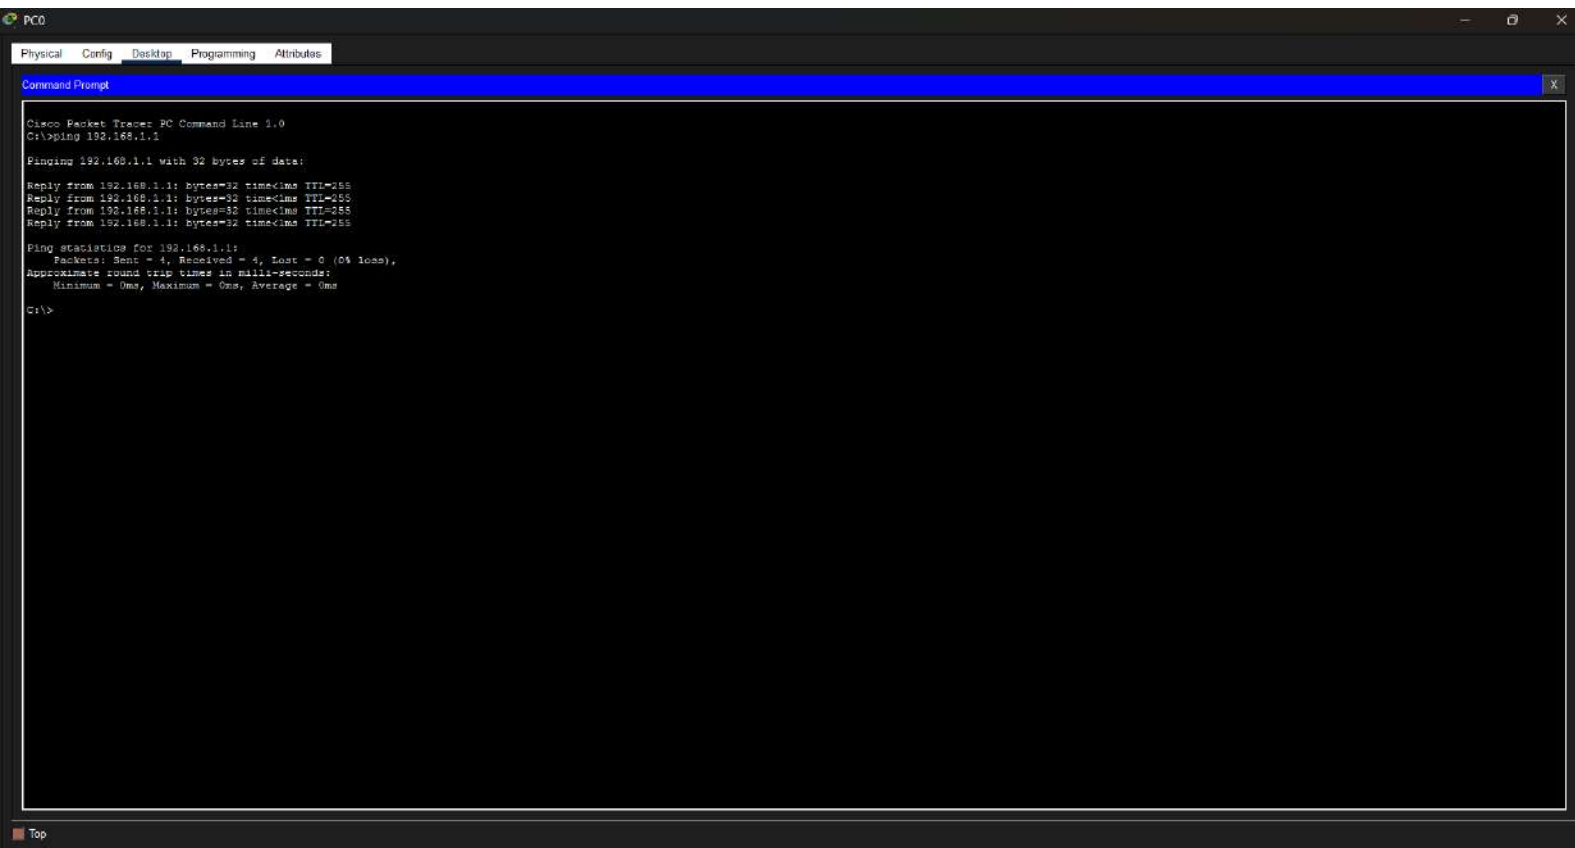

PC0

Physical

Config

Desktop

Programming

Attributes

IP Configuration

X

Interface

FastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.1.2

Subnet Mask

255.255.255.0

Default Gateway

192.168.1.1

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

/

Link Local Address

FE80::202:4AFF:FE84:8712

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password