


COTPSLO

COATED FILMS

TRANSPARENT TOP COATED PRESSURE SENSITIVE BOPP FACESTOCK FILM

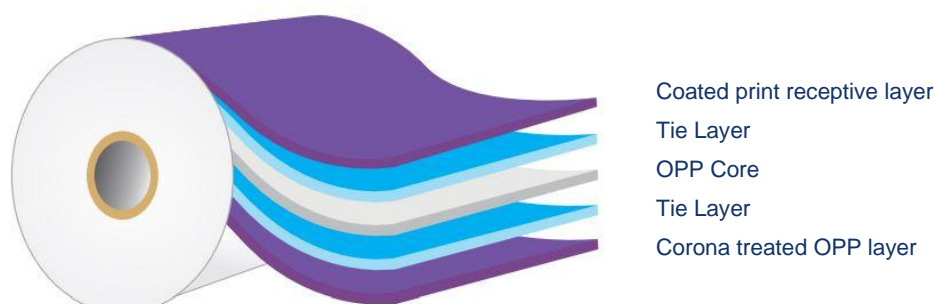

AVAILABLE
CALIPERS

DESCRIPTION

Transparent **BOPP** Film is with one Side Print Receptive Coated & Other Side Treated for Pressure Sensitive Labels.

PRODUCT FEATURES

- Excellent ink adhesion with a broad range of ink systems, including UV curing inks on print receptive coated surface
- Corona treated surface suitable for adhesive anchorage
- High speed press performance
- Coating adhesion is maintained in hot and cold water immersion without clouding
- Superior performance of print surface in humid environment
- Excellent Gloss
- Outstanding Clarity
- Excellent stiffness and mechanical properties
- Good dimensional stability
- Good die cutting performance

APPLICATIONS

- Pressure Sensitive Labels

APPLICATIONS

COTPSLO – Outside print receptive coated surface

PROPERTIES		POSITION	COT41PSLO	COT46PSLO	COT50PSLO	UNITS	TEST METHOD
GENERAL	Nominal Thickness	-	41	46	50	μ	Internal Method
	GSM	-	37.0	41.6	46.1	g/m ²	Internal Method
	Yield	-	27.0	24.1	21.7	m ² /kg	Internal Method
OPTICAL	Gloss	-		90		GU	ASTM D 2457
	Haze	-		2.5		-	ASTM D 1003
SURFACE	Wetting Tension	(Un-coat side)		38		dynes/cm	ASTM D 2578
MECHANICAL	Tensile Strength (at break)	-MD	1300	1250	1250	kg/cm ²	ASTM D 882
		-TD	3000	3150	3150		
	Elongation (at break)	-MD	200	190	190	%	ASTM D 882
		-TD	60	60	60		
THERMAL	Elastic Modulus	-MD	16000	16000	16000	kg/cm ²	ASTM D 882
		-TD	30000	33000	33000		
	Linear Shrinkage (max)	-		4		%	ASTM D 1204
		-		2			

The figures and above properties refer to typical values which are indicative only. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a product specification.

GUIDELINES FOR STORAGE

Temperature should preferably be less than 30°C & humidity 55±5% in storage areas and material should be consumed within three months of receipt. COATED films should be allowed to reach operating room temperature 24 hours before use

FOOD CONTACT

COATED films complies with the requirements of FDA, EC & REACH regulations. Specific documentation is available on request.

SAFETY

Compliance with industrial health and safety standards. COATED films do not present any significant danger to health and safety in the workplace, provided they are used for the intended purpose in accordance with conventional practices and that health & safety regulations are observed. Relevant guidelines can be found in our MSDS (available upon request).

CAUTIONS

- Film characteristics are maintained for six months from the date of invoicing
- Coated reels must not be stacked