


CTHP35-SL34V

THERMAL LAMINATION FILM WITH TRANSPARENT HOLOGRAPHIC EFFECT - PET BASED
(PILLARS OF LIGHT)

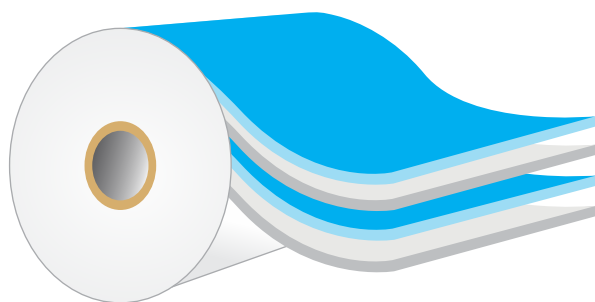

Special Adhesive Layer
Embossing Protective Layer
Embossed Surface
PET Film

38.50
g/m²

AVAILABLE
GRAMMAGE

DESCRIPTION

PET based, extrusion coated transparent holographic film for thermal lamination. CTHP35-SL34V film is soft embossed holographic transparent film with high refractive index and gloss providing high degree of shelf appeal. It is designed in such a manner so that embossable side can be thermally laminated with multiple substrates.

PRODUCT FEATURES

- Excellent holographic effect.
- Excellent bond with substrate.
- Unable to counterfeit.

Availability

- Seamless-SL

APPLICATIONS

- Brand Protection, Paper, Cards, Posters etc.

SURFACE PRINTABILITY OPTIONS

Not Applicable

	PROPERTIES	POSITION	CTHP35-SL34V	UNIT	METHOD
GENERAL	Grammage	-	38.50	g/m ²	ASTM D 1505
	Yield	-	25.97	m ² /kg	Internal
SURFACE	Wetting tension	Ex-Coating side Film Side	44-46 40-42	dy/cm	ASTM D 2578
THERMAL	Lamination Temp.	-	85-95	°C	Internal

The above figures and properties refer to average values of laboratory test on samples of our standard production, it is understood that this entails no obligation or responsibility on our part. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a (end) product specification.

SPECIAL INSTRUCTIONS

- Film to be laminated on above said lamination temperatures, however parameters can be optimized based on lamination speed / dwell time and/or dimensional stability.
- Printed surface must be well dried before lamination.
- In case of both side lamination, it is advised to cool one surface sufficiently before laminating the other surface.
- Surface printing is guaranteed only in specific products, all products are not meant for surface printing. Please contact Technical Services representative prior to printing process.
- Temperature should preferably be less than 30°C & humidity 55±5% in storage areas.
- Material should be consumed within six months of receipt.
- Material should be kept in their original wrapping until the material is loaded on machine.
- Storage atmosphere should be dust free to avoid any contamination while lamination.

SAFETY

Compliance with industrial health and safety standards. Thermal films do not present any significant danger to health and safety in the workplace provided they are used for the intended purpose in accordance with conventional practices and that health & safety regulations are observed.