


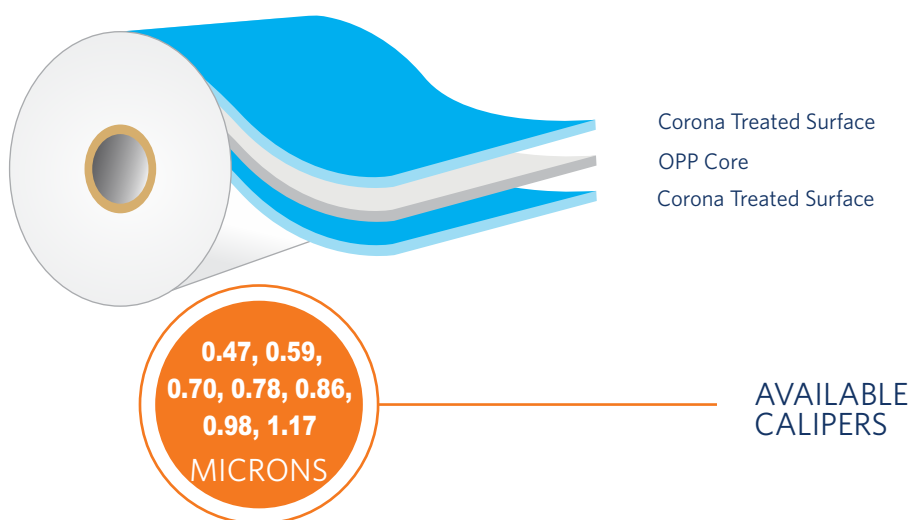

BOPP FILMS

TRANSPARENT NON HEAT SEALABLE CORONA TREATED BOTH SIDES HIGHER TREATMENT INSIDE BOPP FILM FOR CONVERSION

**DESCRIPTION**

OPP TTI is transparent plain high gloss non-heat sealable both side corona treated **BOPP** film. This film is specially designed for printing and lamination process.

PRODUCT FEATURES

- Outstanding clarity and gloss
- Can be laminated with other substrates
- Printable/gluable
- Robust Machinability
- Excellent wetting tension
- Water/oil/grease repellent

APPLICATIONS

- Can be used as outside/inner web of laminates.
- Bakery (Biscuits/cookie/crackers)
- Confectionery(chocolates/gum/sugar)
- Chips/tea/coffee/pasta
- Miscellaneous industrial and house hold applications

	PROPERTIES	POSITION	T12TTI	T15TTI	T18TTI	T20TTI	T22TTI	T25TTI	T30TTI	UNIT	METHOD
GENERAL	Nominal Thickness	-	0.47	0.59	0.70	0.78	0.86	0.98	1.17	mils	Internal Method
	Density	-	0.91	0.91	0.91	0.91	0.91	0.91	0.91	g/cc	Internal Method
	Grammage	-	2.24	2.80	3.36	3.73	4.10	4.66	5.60	lb/1000ft ²	Internal Method
	Yield	-	64380	51535	42958	38599	35118	30935	25732	in ² /lb	Internal Method
OPTICAL	Haze	-	1.5	1.5	1.8	1.8	2.0	2.2	2.3	%	ASTM D 1003
	Gloss	-				95				GU	ASTM D 2457
SURFACE	COF (Dynamic)	Film/Film				0.30				-	ASTM D 1894
	Wetting Tension	-				38*				dyne/cm	ASTM D 2578
MECHANICAL	Tensile Strength (at break)	- MD				18486				psi	ASTM D 882
		- TD				38394					
	Elongation (at break)	- MD				190				%	ASTM D 882
		- TD				60					
	Elastic Modulus	- MD				255960				psi	ASTM D 882
THERMAL		- TD				455040					
	Linear Shrinkage (max)	- MD				3				%	ASTM D 1204
		- TD				1					

* 38 dyne/cm guaranteed for 4 months & 36 dynes/cm guaranteed for 6 months from the invoice date in controlled ambient condition.

The figures and above properties refer to typical values which are indicative only. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a product specification.

GUIDELINES FOR STORAGE

Temperature should preferably be less than 30°C & humidity 55±5% in storage areas and material should be consumed within three months of receipt. OPP films should be allowed to reach operating room temperature 24 hours before use.

FOOD CONTACT

OPP films complies with the requirements of FDA, EC & REACH regulations. Specific documentation is available on request.

SAFETY

Compliance with industrial health and safety standards. OPP films do not present any significant danger to health and safety in the workplace, provided they are used for the intended purpose in accordance with conventional practices and that health & safety regulations are observed. Relevant guidelines can be found in our MSDS (available upon request).

CAUTIONS

- Film characteristics are maintained for six months except for corona treatment from the date of invoicing