


TDXTIE

BOPP FILMS

TRANSPARENT LAP SEALABLE BOPP FILM WITH LOW HEATSEAL TEMPERATURE, HIGH HOT TACK & HIGH HEAT SEAL STRENGTH ON MATT SURFACE AND CORONA TREATED ON OTHER SIDE FOR HIGH SPEED PACKAGING CONVERSION

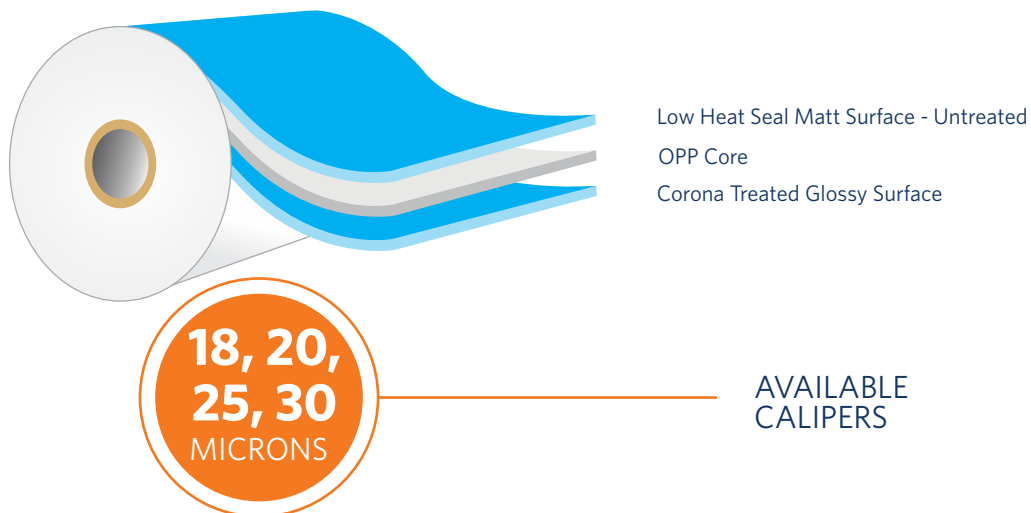

DESCRIPTION

TDXTIE is transparent one side matt finish **BOPP** film. It is one side corona treated glossy surface & other side is low heatseal matte surface especially designed for high speed packaging where its wide seal operating window can be used on high speed machines. The paper like matte appearance provides satiny appearance and a differentiated shelf appeal.

PRODUCT FEATURES

- Lap Sealable
- Wide sealing range with low seal initiation temperature
- Matte appearance and differentiated shelf appeal
- Good performance on HFFS & VFFS machines
- Good printability and suitable for lamination with other substrates
- Suitable for Extrusion as well as Adhesive lamination

APPLICATIONS

- Confectionery (Chocolate / Gum / Sugar)
- Bakery (Biscuits / Cookie / Crackers)
- Chips / Snacks / Pasta
- Health and beauty care

		PROPERTIES	POSITION	TDX18TIE	TDX20TIE	TDX25TIE	TDX30TIE	UNIT	METHOD
GENERAL		Nominal Thickness	-	18	20	25	30	μ	Internal Method
		Density	-	0.91	0.91	0.91	0.91	g/cc	Internal Method
		Grammage	-	16.4	18.2	22.75	27.3	g/m ²	Internal Method
		Yield	-	61	55	44	37	m ² /kg	Internal Method
SURFACE OPTICAL		Haze	-	75				%	ASTM D 1003
		COF (Dynamic)	Film/Film	0.40				-	ASTM D 1894
		Wetting Tension	-	40*				dyne/cm	ASTM D 2578
MECHANICAL		Tensile Strength (at break)	- MD	1200				kg/cm ²	ASTM D 882
			- TD	2500					
		Elongation (at break)	- MD	170				%	ASTM D 882
			- TD	60					
THERMAL		Elastic Modulus	- MD	18000				kg/cm ²	ASTM D 882
			- TD	28000					
		Linear Shrinkage	- MD	4				%	ASTM D 1204
			- TD	2					
		Heat Seal Range	-	115-145				°C	Internal Method
		Heat Seal Strength	-	450				g/25mm	Internal Method (130°C/1sec/30psi)

* 38 dyne/cm guaranteed for 6 months from the invoice date in controlled ambient condition as per below storage guidelines.

The figures and above properties refer to typical values which are indicative only. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a product specification.

GUIDELINES FOR STORAGE

Temperature should preferably be less than 30°C & humidity 55±5% in storage areas and material should be consumed within three months of receipt. OPP films should be allowed to reach operating room temperature 24 hours before use.

FOOD CONTACT

OPP films complies with the requirements of FDA, EC & REACH regulations. Specific documentation is available on request.

SAFETY

Compliance with industrial health and safety standards. OPP films do not present any significant danger to health and safety in the workplace, provided they are used for the intended purpose in accordance with conventional practices and that health & safety regulations are observed. Relevant guidelines can be found in our MSDS (available upon request).

CAUTIONS

- Film characteristics are maintained for six months from the date of invoicing