


## CPMWL-G

### GOLD METALIZED PET

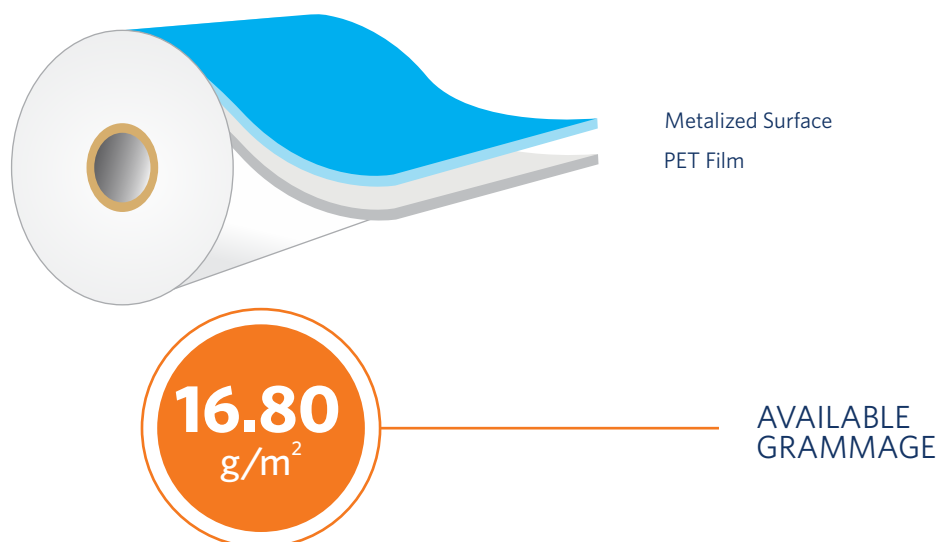

#### DESCRIPTION

CPMWL-G is golden yellow metalized PET film. This film is produced via polymer modification and having high gloss and excellent barrier properties.

#### PRODUCT FEATURES

- Excellent lustre
- Excellent dimensional stability and process ability
- High stiffness

#### APPLICATIONS

- Suitable for various packaging and decorative applications.

#### SURFACE PRINTABILITY OPTIONS

- Gluable and Stampable

PROPERTIES		POSITION	CPM12WL-G	UNIT	METHOD
GENERAL	Nominal Thickness	-	12	μ	Internal
	Grammage	-	16.80	g/m <sup>2</sup>	ASTM D 1505
	Yield	-	59.52	m <sup>2</sup> /kg	Internal
SURFACE	Wetting tension	Metal side	56	dy/cm	ASTM D 2578
	COF ( Chemical to Metallized) (max)	dy	0.65		ASTM D 1894
OPTICAL	Optical Density	-	2.2		Internal
THERMAL	Shrinkage	MD	2.8	%	Internal 150 C and 30 minutes
		TD	0.8		
MECHANICAL	Tensile Strength	MD	1900	Kg/cm <sup>2</sup>	ASTM D-882
		TD	1900		
	Elongation	MD	100	%	
	TD	90			

The above figures and properties refer to average values of laboratory test on samples of our standard production, it is understood that this entails no obligation or responsibility on our part. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a (end) product specification.