


P38TTOIML

BOPP FILMS

WHITE CAVITATED NON HEAT SEALABLE BOTH SIDES CORONA TREATED WITH HIGHTREATMENT OUTSIDE FOR IN-MOULD LABELS

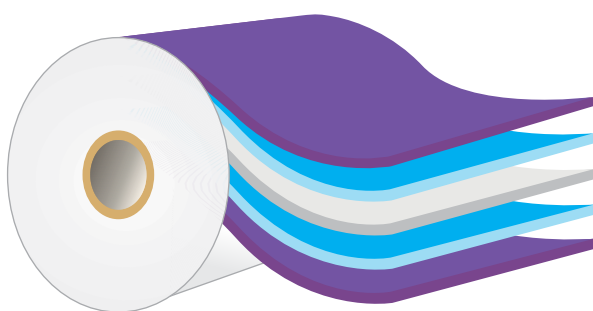

High Corona Treated Glossy Surface for Printing
Tie Layer
White Cavitated OPP Core
Tie Layer
Corona Treated Glossy Surface for Bonding



AVAILABLE
CALIPERS

DESCRIPTION

OPP PIML is white cavitated high gloss **BOPP** film specially developed for PP & PE In-mould label applications. It is designed for optimized performance on the most demanding machines and superior graphics.

PRODUCT FEATURES

- High yield due to low density
- Printable/gluable
- Robust machinability
- Excellent anti-static properties
- Outstanding opacity and whiteness
- Superb gloss
- Excellent web flatness

APPLICATIONS

As a part of laminate in In-Mould Labels for PP & PE Injection Moulding

- Ice Cream Containers and lids
- Paints / Chemical / Motor oil containers

	PROPERTIES	POSITION	P38TTOIML	UNIT	METHOD
GENERAL	Nominal Thickness	-	38	μ	Internal Method
	Density	-	0.67	g/cc	Internal Method
	Grammage	-	25.5	g/m ²	Internal Method
	Yield	-	39.3	m ² /kg	Internal Method
OPTICAL	Transmittance	-	26	%	ASTM D 1003
	Gloss	-	65	GU	ASTM D 2457
SURFACE	COF (Dynamic)	-	0.3	-	ASTM D 1894
	Wetting Tension	-	38*	dyne/cm	ASTM D 2578
MECHANICAL	Tensile Strength (at break)	- MD - TD	650 1500	kg/cm ²	ASTM D 882
	Elongation (at break)	- MD - TD	140 40	%	ASTM D 882
	Elastic Modulus	- MD - TD	10000 20000	kg/cm ²	ASTM D 882
THERMAL	Linear Shrinkage	- MD - TD	4 1	%	ASTM D1204

* 38 dyne/cm guaranteed for 3 months from delivery in controlled ambient conditions as per storage guidelines.

The figures and above properties refer to typical values which are indicative only. Customers should verify the suitability of the film for its specific end use. Therefore this document will not represent a product specification.

GUIDELINES FOR STORAGE

Temperature should preferably be less than 30°C & humidity 55±5% in storage areas and material should be consumed within three months of receipt. OPP films should be allowed to reach operating room temperature 24 hours before use.

FOOD CONTACT

OPP films complies with the requirements of FDA, EC & REACH regulations. Specific documentation is available on request.

SAFETY

Compliance with industrial health and safety standards. OPP films do not present any significant danger to health and safety in the workplace, provided they are used for the intended purpose in accordance with conventional practices and that health & safety regulations are observed. Relevant guidelines can be found in our MSDS (available upon request).

CAUTIONS

- Film characteristics are maintained for six months from the date of manufacturing except for wetting tension