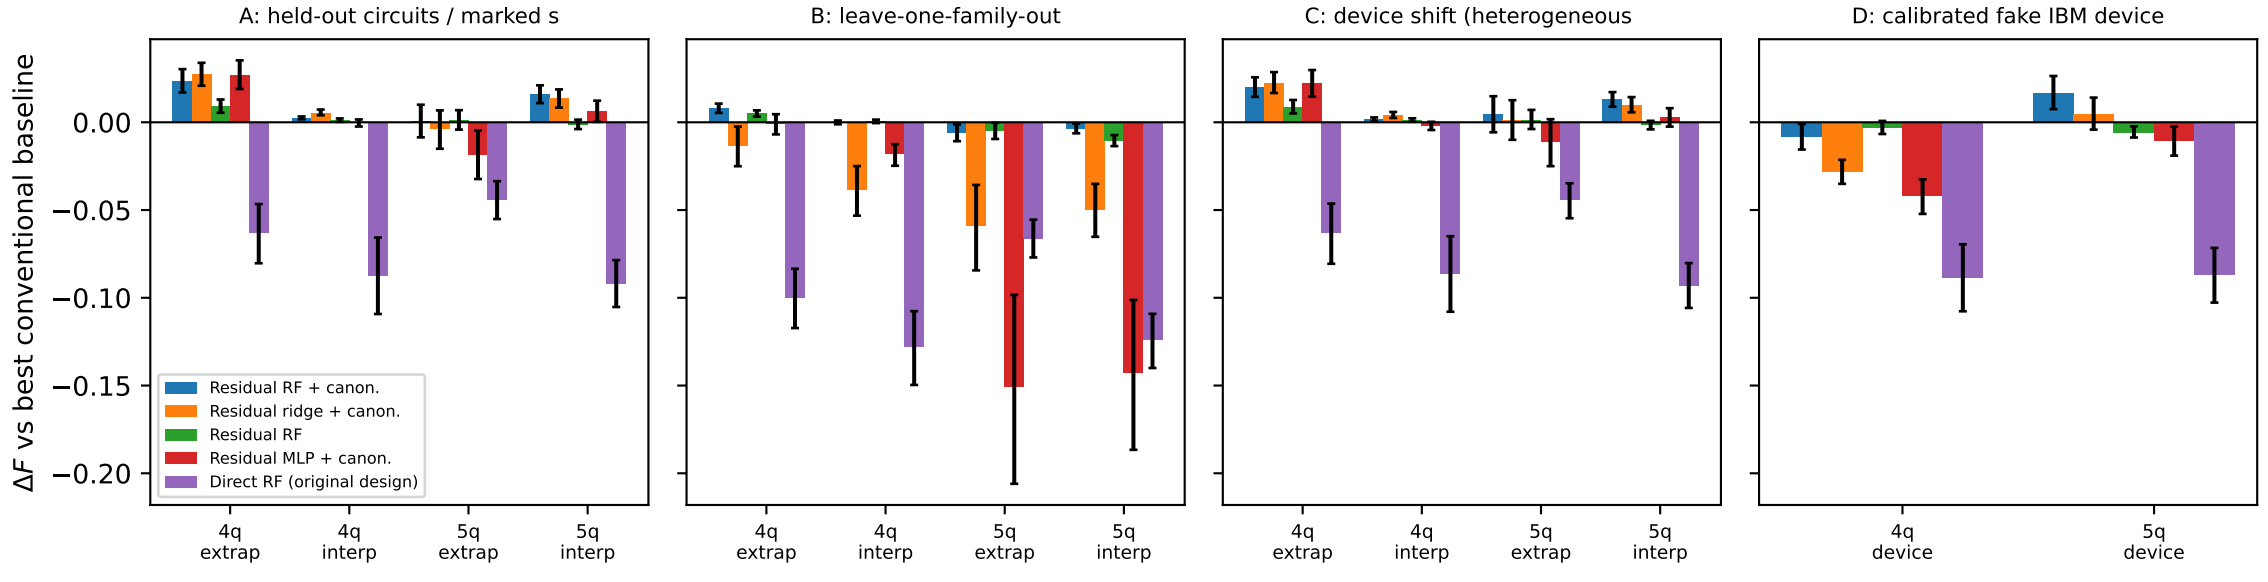
A: held-out circuits / marked s
B: leave-one-family-out
C: device shift (heterogeneous
D: calibrated fake IBM device
ΔF vs best conventional baseline
0.00
−0.05
−0.10
−0.15
−0.20
Residual RF + canon.
Residual ridge + canon.
Residual RF
Residual MLP + canon.
Direct RF (original design)
4q extrap
4q interp
5q extrap
5q interp
4q device
5q device