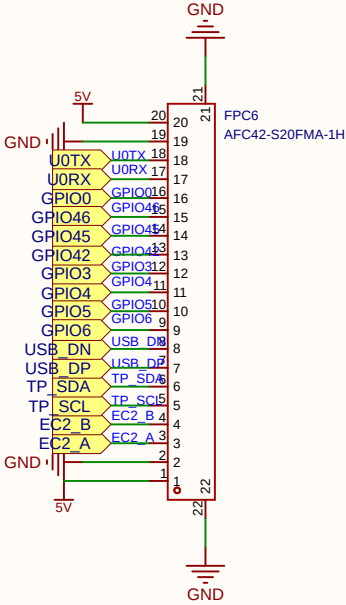


原理图	Schematic5_1			创建日期	2025-10-29
				更新日期	2025-10-29
板子	旋钮模组底板_1			图页	CONN
绘制		旋钮屏最终版			
审阅					
		版本	尺寸	页 2 共 3	
		V1.0	A4	嘉立创EDA	

A

B

C


D

A



B

C




D

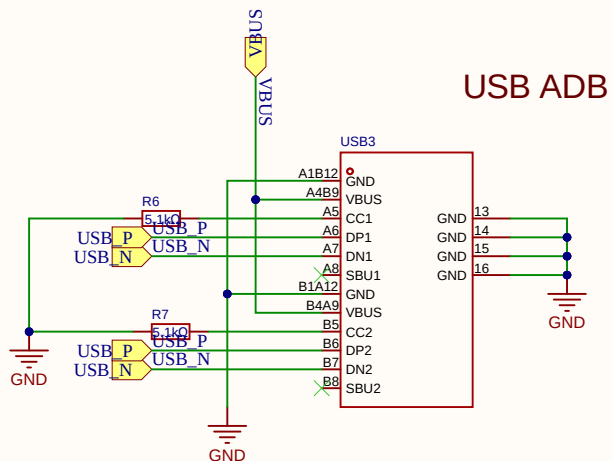


Type-C

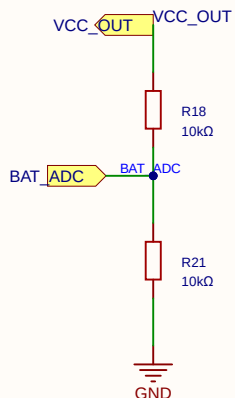


USB ADB

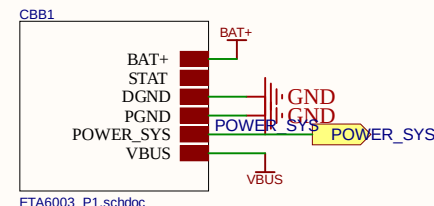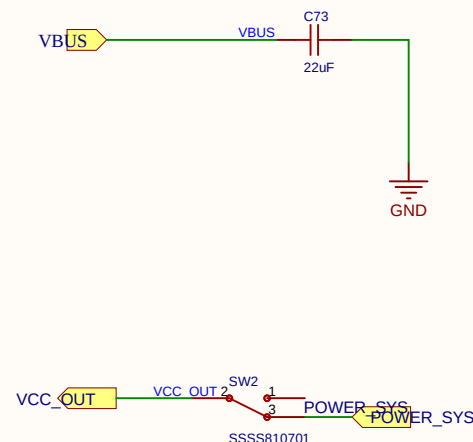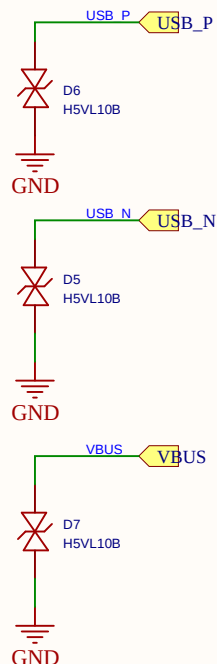








原理图	Schematic5_1			创建日期	2025-10-29
				更新日期	2025-10-29
板子	旋钮模组底板_1			图页	PWR
绘制		旋钮屏最终版			
审阅					
		版本	尺寸	页 3 共 3	
		V1.0	A4	嘉立创EDA	

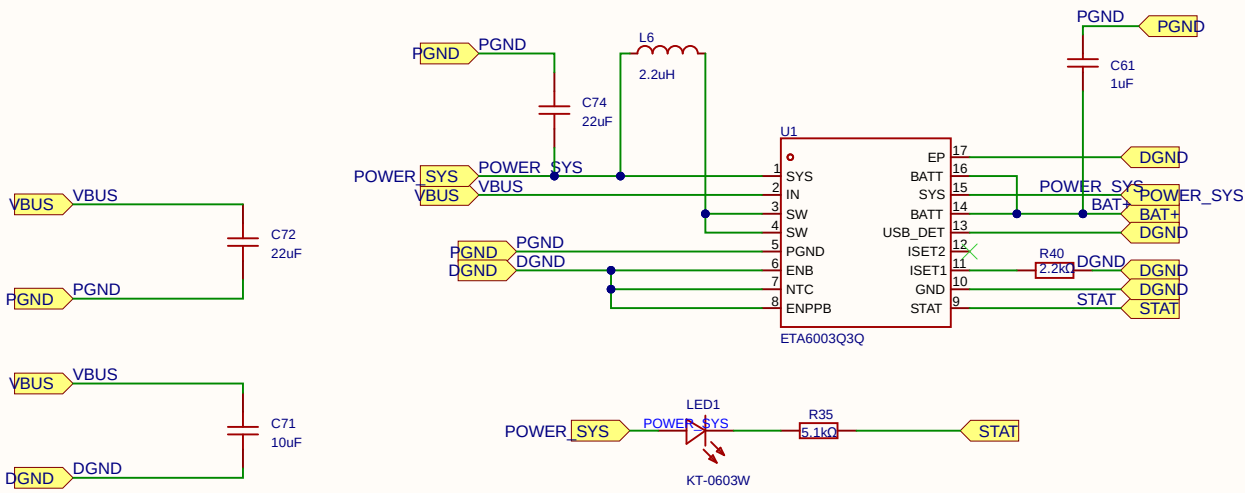

原理图	ETA6003			创建日期	2025-11-28
				更新日期	2025-11-28
板子	ETA6003			图页	P1
绘制		ETA6003			
审阅					
		版本	尺寸	页 0 共 0	
		V1.0	A4	嘉立创EDA	

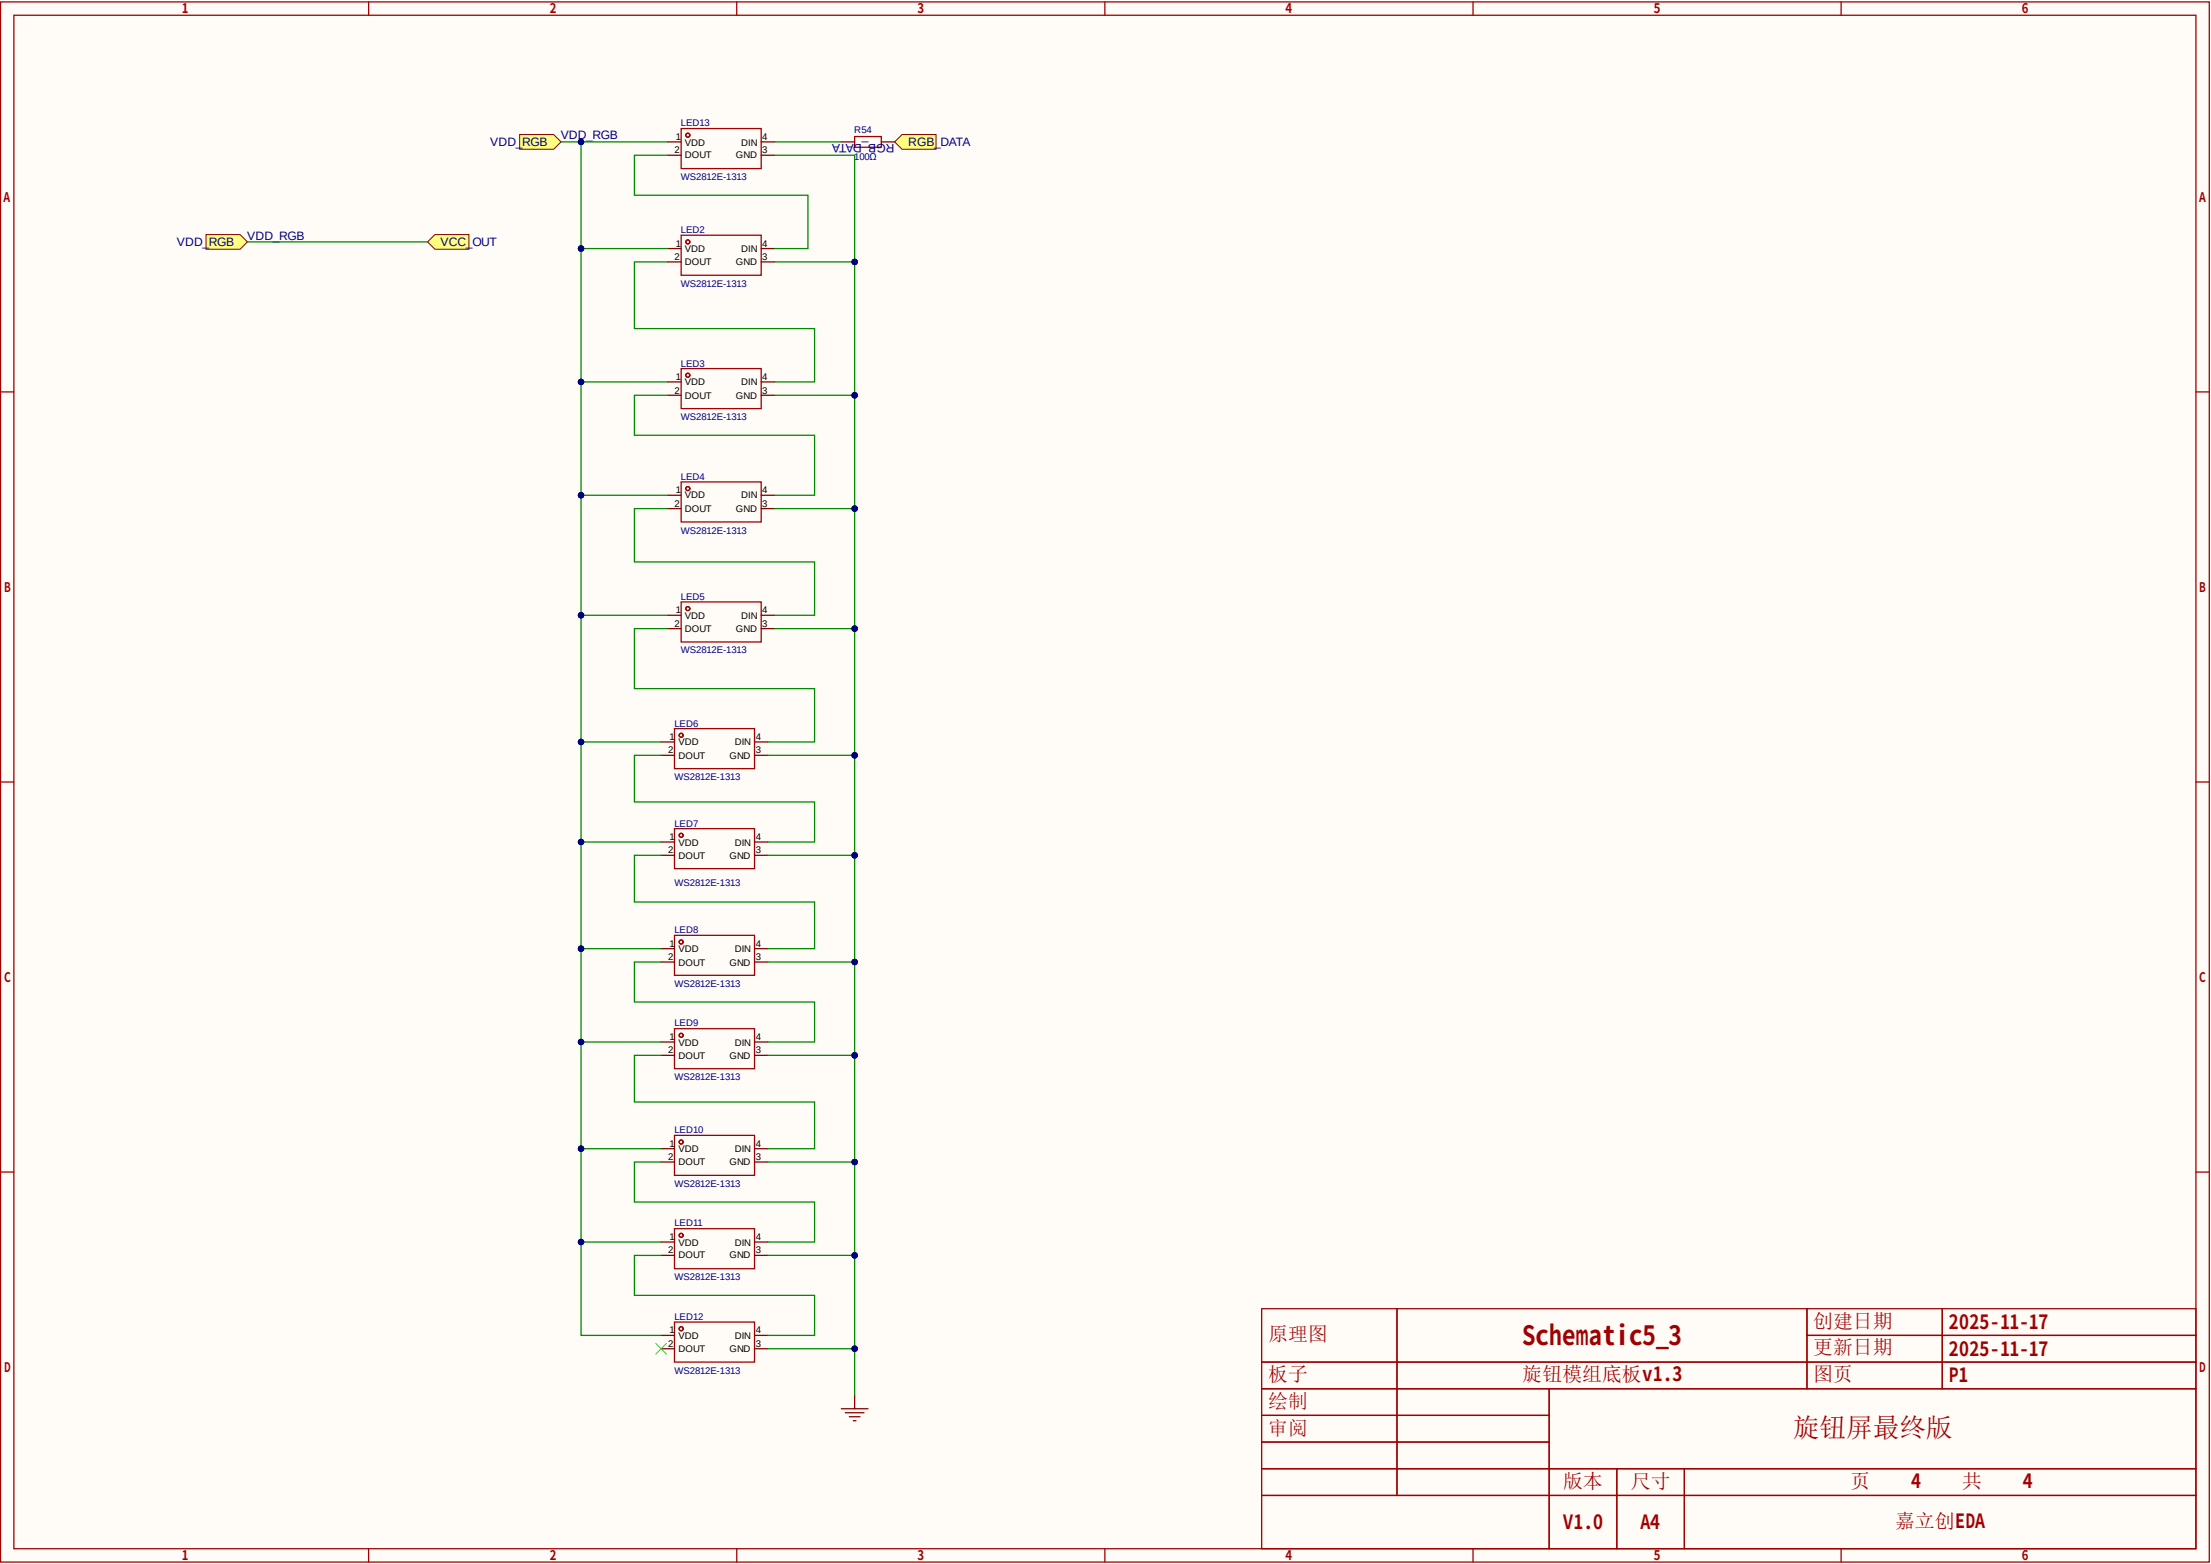

原理图	Schematic5_3			创建日期	2025-11-17
板子	旋钮模组底板v1.3			更新日期	2025-11-17
绘制		旋钮屏最终版			
审阅					
		版本	尺寸	页 4 共 4	
		V1.0	A4	嘉立创EDA	

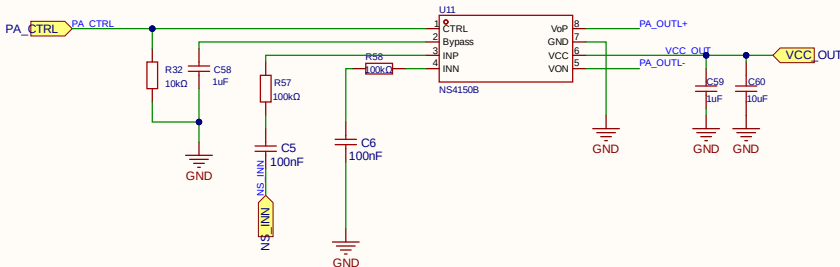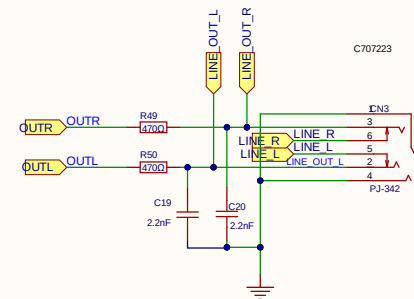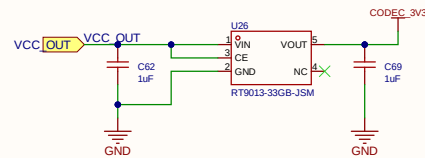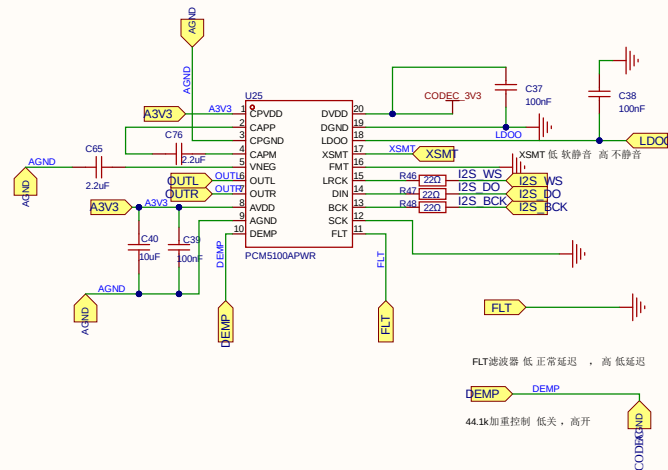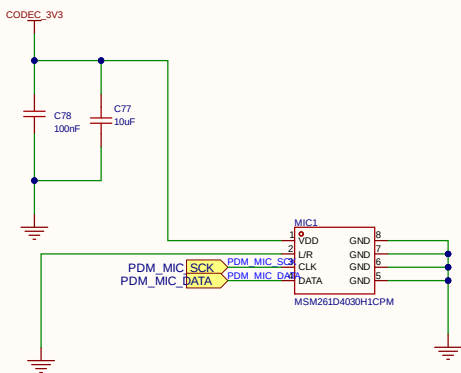

原理图	Schematic5_1			创建日期	2025-10-29
板子	旋钮模组底板_1			更新日期	2025-10-29
绘制				图页	CODEC
审阅				旋钮屏最终版	
		版本	尺寸	页 1 共 3	
		V1.0	A4	嘉立创EDA	

Comment	Description	Designator	Footprint	LibRef	Quantity
1uF	容值:1uF;精度:±10%; 额定电压:10V;温度 系数X5R;	C61	C0402	CL05A105KP5NNNC	1
10uF	容值:10uF;精度:± 10%;额定电压:10V;材 质(温度系数)X5R;	C71	C0603	CL10A106KP8NNNC	1
22uF	容值:10uF;精度:± 10%;额定电压:25V;温 度系数X5R;	C72	C0805_SPEC	CL21A106KAYNNNE _C15850	1
22uF	容值:22uF;精度:± 20%;额定电压:25V;温 度系数X5R;	C73, C74	C0805	CL21A226MAQNNN E	2
H5VL10B	极性:双向;反向截止 电压(Vrwm):5V;钳位 电压:10V;峰值脉冲 电流(ipp):5A;峰值脉 冲功率(Ppp):50W;击 穿电压:5.6V;	D5, D6, D7	SOD-882_L1.0- W0.6-BI	H5VL10B	3
2.2uH	电感值:2.2uH;精度:± 20%;额定电流:3A;饱 和电流(Isat):3.8A;类 型:一体成型电感;	L6	IND-SMD_L2.5- W2.0_MHCHL2520	FTC252012S2R2MB CA	1
KT-0603W	发光颜色:白色;正向 压降(Vf):2.6V~3.1V; 功率:100mW;正向电 流:5mA;发光强 度:360mcd;发光角 度:120°;	LED1	LED0603-R- RD_WHITE	KT-0603W	1
5.1kΩ	电阻类型:厚膜电阻; 阻值:5.1kΩ;精度:± 1%;功率:62.5mW;工 作电压:50V;温度系 数:±100ppm/°C;	R6, R7	R0402-MY	0402WGF5101TCE	2
10kΩ	电阻类型:厚膜电阻; 阻值:10kΩ;精度:±1%; 功率:62.5mW;工 作电压:50V;温度系数:± 100ppm/°C;	R18, R21	R0402-MY	0402WGF1002TCE	2
5.1kΩ	电阻类型:厚膜电阻; 阻值:5.1kΩ;精度:± 1%;功率:62.5mW;工 作电压:50V;温度系 数:±100ppm/°C;	R35	R0402	0402WGF5101TCE	1
2.2kΩ	电阻类型:厚膜电阻; 阻值:2.2kΩ;精度:± 1%;功率:62.5mW;工 作电压:50V;温度系 数:±100ppm/°C;	R40	R0402	0402WGF2201TCE	1
SSSS810701	电路结构:单刀双掷; 安装方式:卧贴;额定 电流(DC):300mA;额 定电压(DC):5V;额定 电流(AC):-;额定电压 (AC):-;机械寿命:1万 次;	SW2	SW- SMD_SSSS810701	SSSS810701	1
ETA6003Q3Q	工作电压:4.4V~5.5V; 最大充电电流:2A;电 池类型:锂离子;电池 节数:1;	U1	QFN-16_L3.0-W3.0- P0.50-TL-EP1.7-2	ETA6003Q3Q_C545 5585	1
HX 1.25-2PIN LTJS	插针结构:1x2P;间 距:1.25mm;安装方 式:立贴;总PIN数:2P; 排数:1;每排PIN数:2; 额定电流:1A;触头材 质:磷青铜;触头镀层: 锡;工作温度范围:- 25°C~+85°C;	U23	CONN-SMD_2P- P1.25_HX-1.25- 2PIN-LTJS	HX 1.25-2PIN LTJS	1
TYPEC-304-BCP16	连接器类型:Type-C; 标准:USB 3.1;公母:母 座;触点数量:16;端口 数量:1;安装方式:卧 贴;额定电流 - 电 源:3A;工作温度范 围:-25°C~+85°C;焊 接温度(最大值):260 °C;	USB3	USB-C- SMD_TYPEC-304- BCP16	TYPEC-304- BCP16_C720629	1