# Simple Pendulum

---


# Project Objective

The objective is to:

1. Design a simple pendulum mechanism in **SolidWorks**
2. Derive its mathematical model using physics principles
3. Develop a simulation model in **MATLAB**
4. Analyze:
    - Angular displacement
    - Velocity
    - Acceleration
    - Natural frequency
    - Period of oscillation
5. Compare theoretical and simulation results

---

# Mathematical Modelling

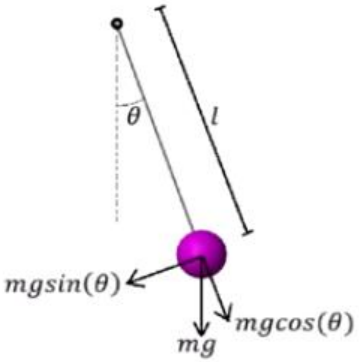


## Lagrange Method

Instead of analysing forces, only need:

1. Kinetic Energy (K)
2. Potential Energy (P)

Then use the **Lagrange equation**:

$$\frac{d}{dt}\left(\frac{\partial L}{\partial \dot{\theta}}\right) - \frac{\partial L}{\partial \theta} = Q$$

Where,

- $L = K - P$ (The Lagrangian)
- Q = generalized non-conservative force (e.g., damping)

## Write the Kinetic Energy

$$K = \frac{1}{2} ml^2 \dot{\theta}^2$$

## Write the Potential Energy

$$P = mgl(1 - cos\theta)$$

## Form the Lagrangian

$$L = K - P$$

$$L = \frac{1}{2} ml^2 \dot{\theta}^2 - \ mgl(1 - cos\theta)$$

## Compute the Partial Derivatives

Differentiate with respect to angular velocity:

$$\frac{\partial L}{\partial \dot{\theta}} = ml^2 \dot{\theta}$$

Take the time derivative:

$$\frac{d}{dt}(ml^2 \dot{\theta}) = ml^2 \ddot{\theta}$$

Differentiate with respect to angle:

$$\frac{\partial L}{\partial \theta} = -mglsin\theta$$

## Add Damping

The generalized damping force is

$$Q = -b\dot{\theta}$$

### Substitute into Lagrange's Equation

$$ml^2\ddot{\theta} - (-mglsin\theta) = -b\dot{\theta}$$

Rearrange:

$$ml^2\ddot{\theta} + b\dot{\theta} + mglsin\theta = 0$$

---

# State Space Model

Define states:

$$x_1 = \theta$$
$$x_2 = \dot{\theta}$$

Therefore:

$$\dot{x_1} = x_2$$
$$\dot{x_2} = -\frac{g}{L}x_1$$

Matrix form:

$$\begin{bmatrix}\dot{x_1}\\ \dot{x_2}\end{bmatrix} = \begin{bmatrix}0 & 1\\ -\frac{g}{L} & 0\end{bmatrix}\begin{bmatrix}x_1\\ x_2\end{bmatrix}$$

---

# simulation parameters

| Parameter | Value |
|---|---|
| Mass (m) | 2 kg |
| Length (L) | 0.5 m |
| Damping (b) | 0.05 N·m·s/rad |
| Gravity (g) | 9.81 m/s² |
| Initial angle | 30° (0.5236 rad) |
| Initial angular velocity | 0 rad/s |
| Simulation time | 30 seconds |