

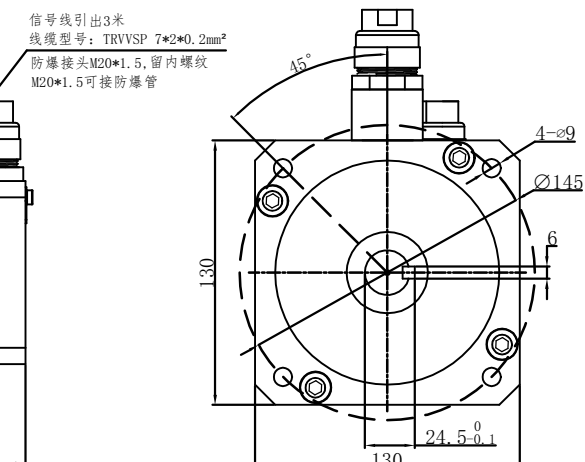
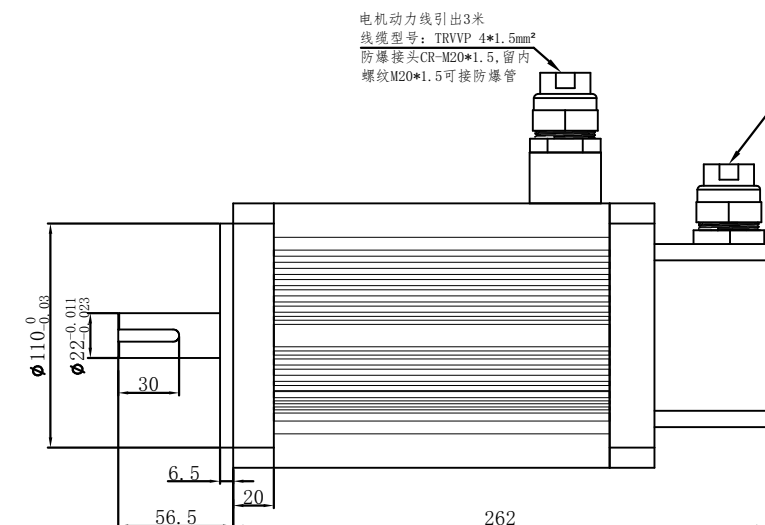


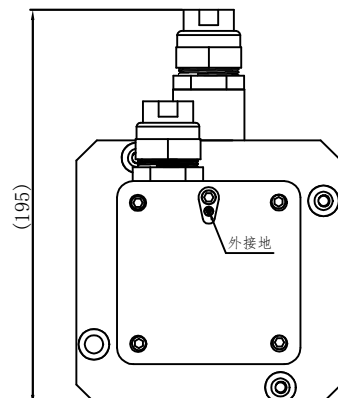

motor phase sequence

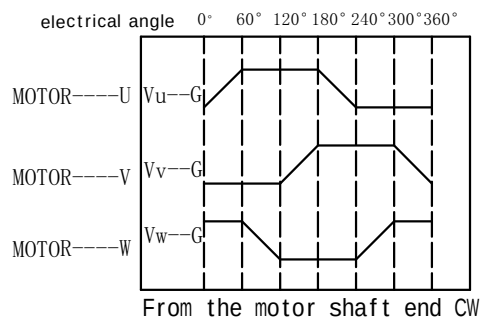

cable definition

power connection definition	
definition	color
U	Blue
V	Yellow
W	Red
PE	Yellow green

Encoder connection definition	
definition	cable color
5V	Red
0V	Black
A+	Blue
A-	Blue black
B+	Green
B-	Green black
Z+	Yellow
Z-	Yellow black
U+	Brown
U-	Brown black
V+	Purple
V-	Purple black
W+	Orange
W-	Orange black

Parameter

Model	130ST-M06030-EX
Power(KW)	1.8
Rated voltage(V)	220(AC)
Rated current(A)	7.2
Rated speed(rpm)	3000
Rated torque (Nm)	6
Rotor inertia(Kgcm ²)	12.6
level of protection	IP65
Motor insulation class	F
operating environment	ambient temperature: 0-50°C ambient humidity: (<90%no condensation)
weight(Kg)	---



设计		比例	1:1	图号	材料	名称
日期		重量				规格书
审核		配合			防爆交流伺服电机	
日期		图号	2020.12.26			