
START SERIES

S-2013

Basic 2G Tracker
with BLE and RS-485

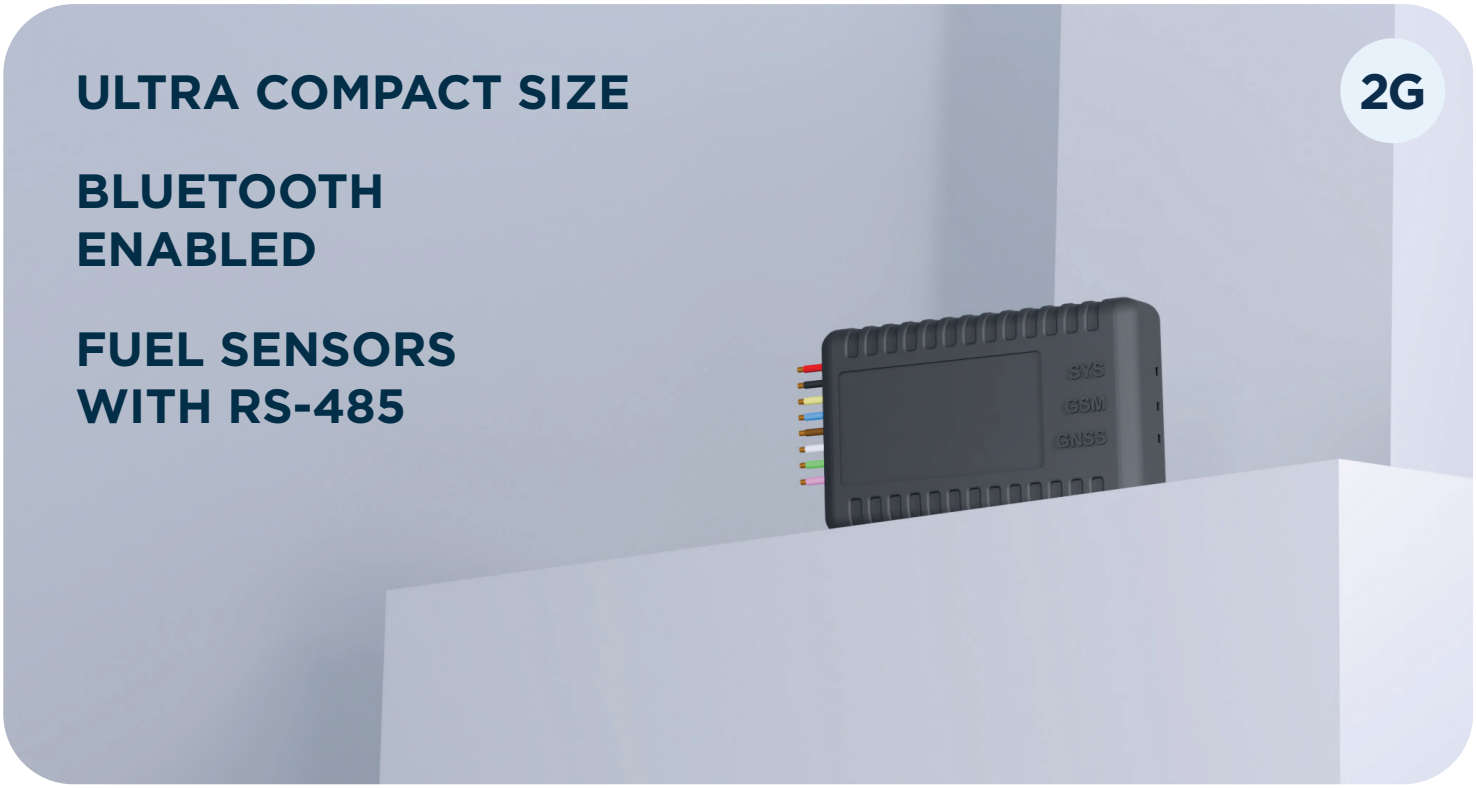

BASIC FUNCTIONALITY

Ultra-Compact Design
You can install tracker even where you did not expect to see it

Fast Data Transmission
Real-time data streaming

AES 128
Data encryption

Three-Axis Accelerometer
Accurately measure and detect acceleration, movement and vibrations

Engine Hours Calculation
According to device algorithm

USB Type-C
Configuration or operating mode

Up to 4 BLE Sensors
With custom parameters

Up to 3 Servers
Simultaneous data transfer

Black BOX
25 000 records

Flexible Power Saving Mode
Custom setting of operating modes to optimize energy

Bluetooth 4.0
For sensors connection and remote device set-up

RS-485
Up to 6 fuel level sensors

130 mAh
Back-up battery

Unplug Detection

200 V
Overvoltage protection

3 IN
1 OUT

SOFTWARE AND SERVICE SUPPORT

Motorbikes

Light Vehicles

Cargo Transportation

Fuel Management

TECHNOLOGY

GNSS/GSM/GPRS/BLUETOOTH

GNSS RECEIVER

GNSS	GPS, GLONASS, BEIDOU
Hot Start	< 1 s
Warm Start	< 22 s
Cold Start	< 29 s

CELLULAR RECEIVER GSM/GPRS/LTE

2G Bands	Class 4 (2W) in GSM 850 and EGSM 900
	Class 1 (1W) in DCS 1800 and PCS 1900
Data Support	SMS (Text/Data)
Number of SIM	1
SIM Type	Nano-SIM

BLUETOOTH 4.0 + LE (UP TO 4 BLE SENSORS SUPPORT)

Supported Peripherals	Fuel Level, Temperature and Humidity, Axle Load,
	Tilt Angle, Universal BLE , BLE by User Parameters,
	Headset
All Sensor Parameters	Battery Charge, Signal Strength, etc.

POWER

Input Voltage Range	9,5 – 47 V DC with Overvoltage Protection up to 200 V
Back-up Battery	130 mAh Li-Po Battery (3,7 V)

PHYSICAL SPECIFICATION

Dimensions	65,5 x 38,4 x 14,3 mm (L x W x H)
Weight	35 g

INTERFACES

Digital Inputs	2
Analog Inputs (Configured as Digital)	1
Digital Outputs	1
RS-485 LLS	Compatible (Extended Range)
GNSS/Cellular Antennas	Internal
USB Interface	Type-C
Indication	3 Status LED Lights
Internal Flash Memory	25 000 Records

FULL SPECIFICATIONS