


ESTABLISHMENT OF LAN NETWORK BETWEEN TWO COMPUTERS

Ping Response from Sys 1 :-

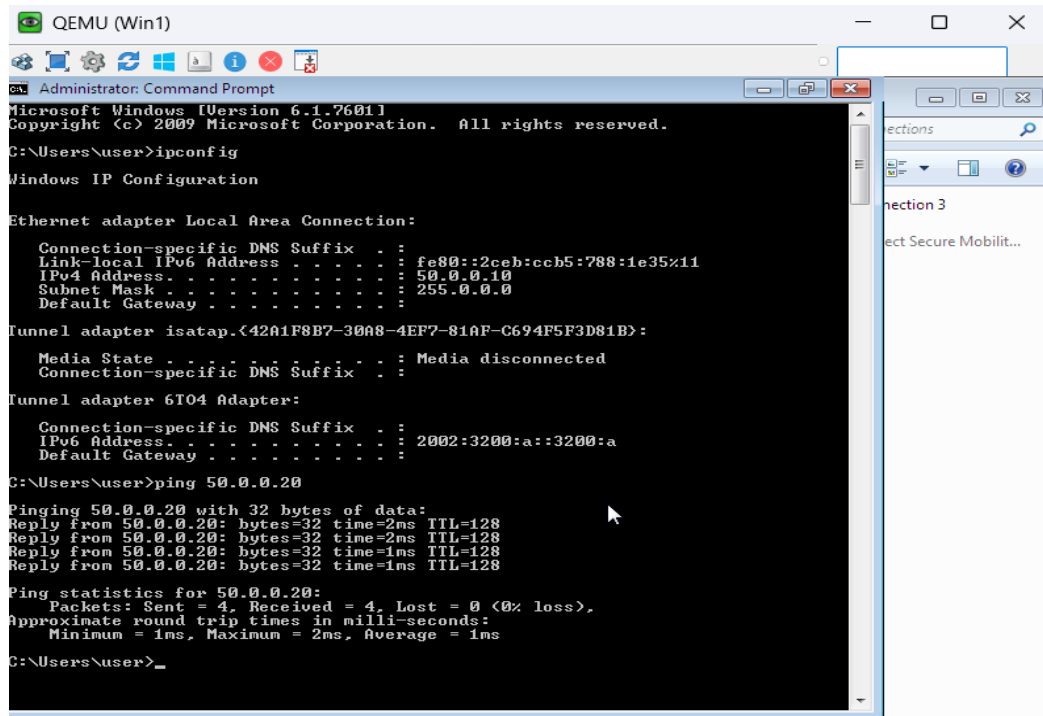

```
QEMU (Win1)
Administrator: Command Prompt
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::2ceb:ccb5:788:1e35%11
    IPv4 Address. . . . . : 50.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

Tunnel adapter isatap.{42A1F8B7-30A8-4EF7-81AF-C694F5F3D81B}:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

Tunnel adapter 6T04 Adapter:

    Connection-specific DNS Suffix  . : 
    IPv6 Address. . . . . : 2002:3200:a::3200:a
    Default Gateway . . . . . : 


C:\Users\user>ping 50.0.0.20

Pinging 50.0.0.20 with 32 bytes of data:
Reply from 50.0.0.20: bytes=32 time=2ms TTL=128
Reply from 50.0.0.20: bytes=32 time=2ms TTL=128
Reply from 50.0.0.20: bytes=32 time=1ms TTL=128
Reply from 50.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 50.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\user>_
```

Ping Response from Sys 2 :-

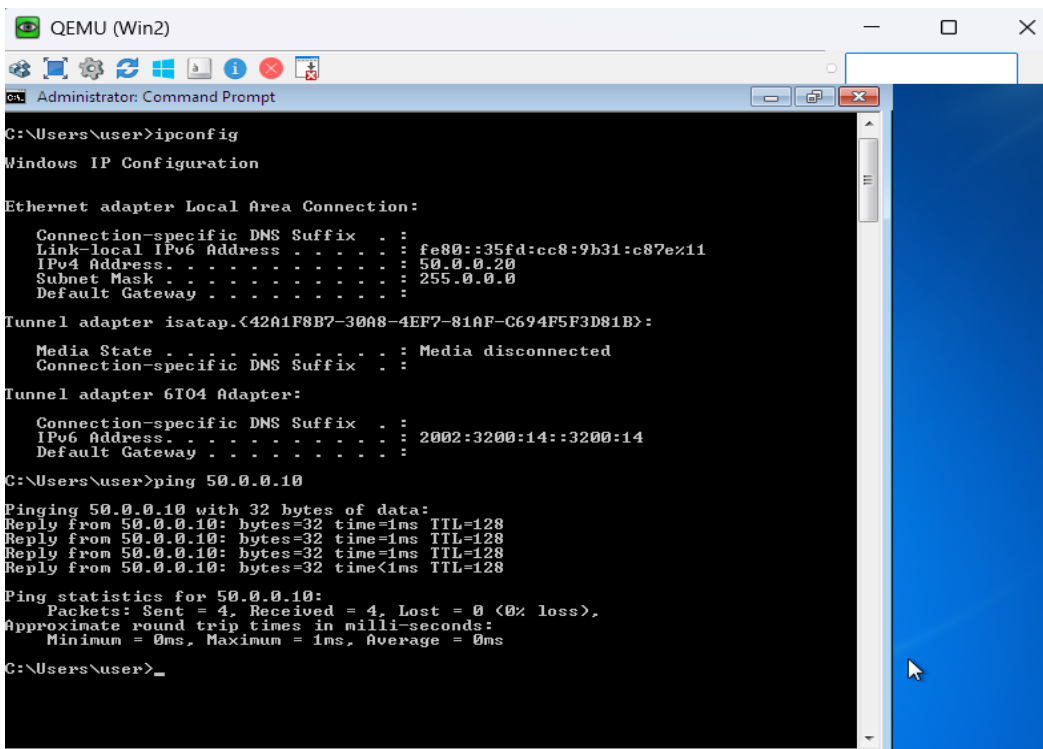

```
QEMU (Win2)
Administrator: Command Prompt
C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::35fd:cc8:9b31:c87e%11
    IPv4 Address. . . . . : 50.0.0.20
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

Tunnel adapter isatap.{42A1F8B7-30A8-4EF7-81AF-C694F5F3D81B}:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

Tunnel adapter 6T04 Adapter:

    Connection-specific DNS Suffix  . : 
    IPv6 Address. . . . . : 2002:3200:14::3200:14
    Default Gateway . . . . . : 


C:\Users\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time=1ms TTL=128
Reply from 50.0.0.10: bytes=32 time=1ms TTL=128
Reply from 50.0.0.10: bytes=32 time=1ms TTL=128
Reply from 50.0.0.10: bytes=32 time=1ms TTL=128

Ping statistics for 50.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\user>_
```

Ping Response using Windows Name

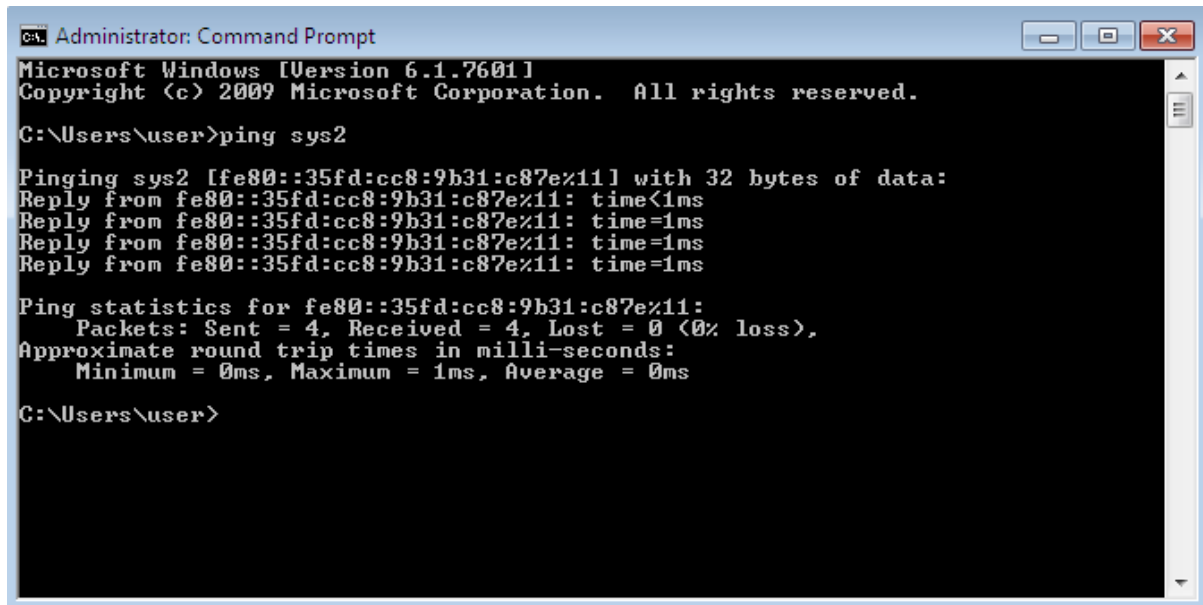


```
C:\Users\user>ping sys2

Pinging sys2 [fe80::35fd:cc8:9b31:c87e%11] with 32 bytes of data:
Reply from fe80::35fd:cc8:9b31:c87e%11: time<1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms

Ping statistics for fe80::35fd:cc8:9b31:c87e%11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\user>
```

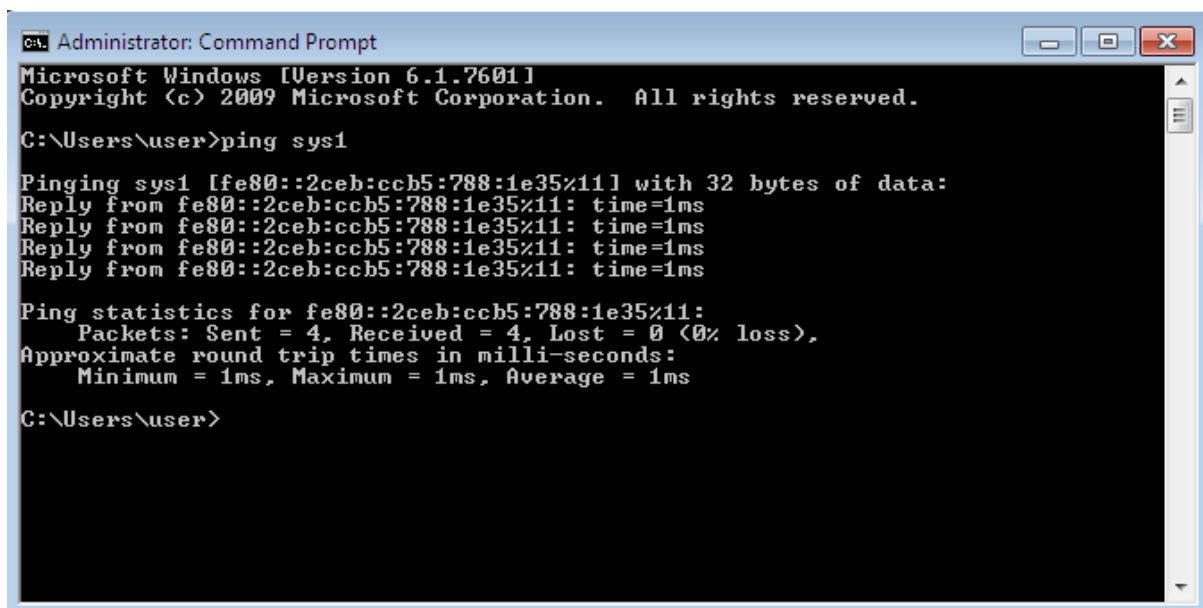


```
C:\Users\user>ping sys1

Pinging sys1 [fe80::2ceb:ccb5:788:1e35%11] with 32 bytes of data:
Reply from fe80::2ceb:ccb5:788:1e35%11: time=1ms
Reply from fe80::2ceb:ccb5:788:1e35%11: time=1ms
Reply from fe80::2ceb:ccb5:788:1e35%11: time=1ms
Reply from fe80::2ceb:ccb5:788:1e35%11: time=1ms

Ping statistics for fe80::2ceb:ccb5:788:1e35%11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\user>
```

File Sharing from Sys1 to Sys 2

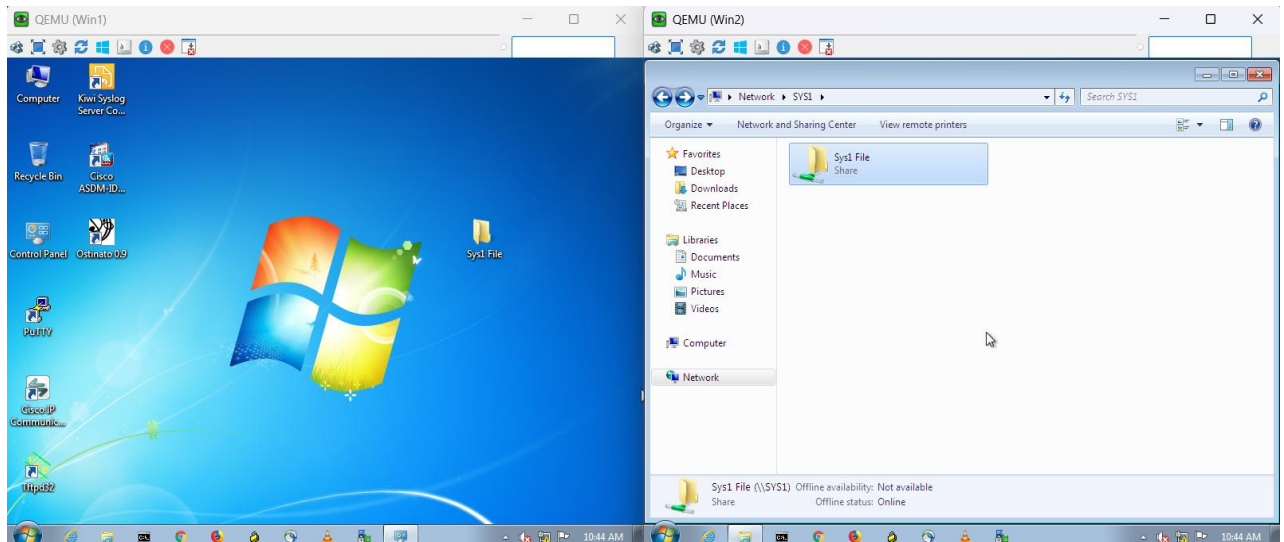

Remote Access from Sys2 to Sys 1

