

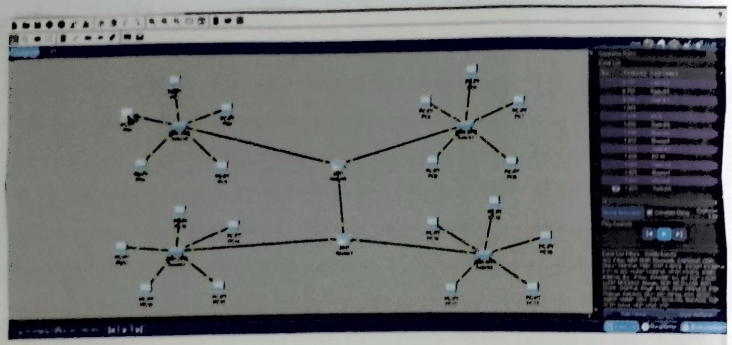


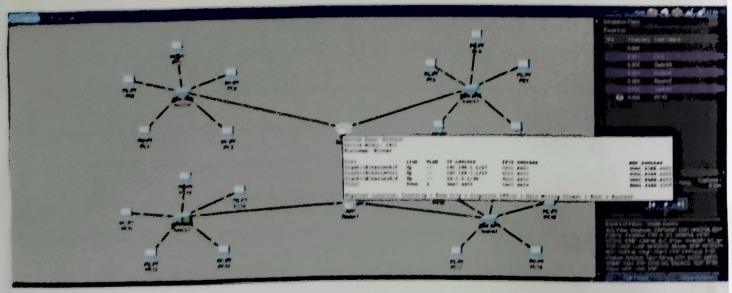

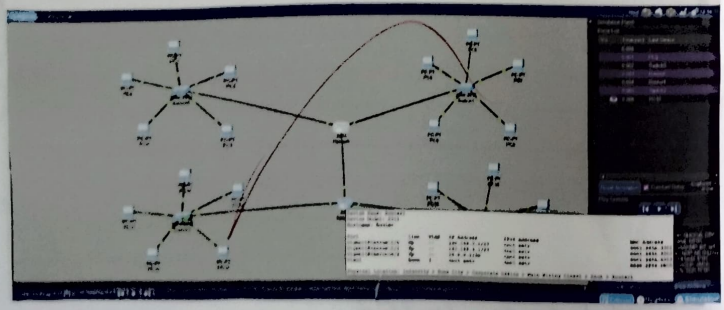

Expno:09

Design a simple network Topology using Cisco Packet Tracer

Aim:

To design and configure a network using one router, two switches, and four PCs in Cisco Packet Tracer and verify communication between the devices.

Procedure:

1. Open Cisco Packet Tracer.
2. Add one router, two switches, four PCs
3. Connect the devices using copper straight-through cables.
4. Configure the router interfaces with IP addresses 192.168.1.1 and 192.168.2.1.
5. Assign IP addresses, Subnet masks, and default gateways of all four PCs.
6. Enable the router interfaces using the no shutdown command.
7. Open the PC command prompt and use the ping command to test connectivity between PCs.
8. Check the ping output to verify successful communication.

Result:

Thus, a simple network topology was designed and configured successfully using cisco Packet tracer, and communication between the devices was verified using the ping command.