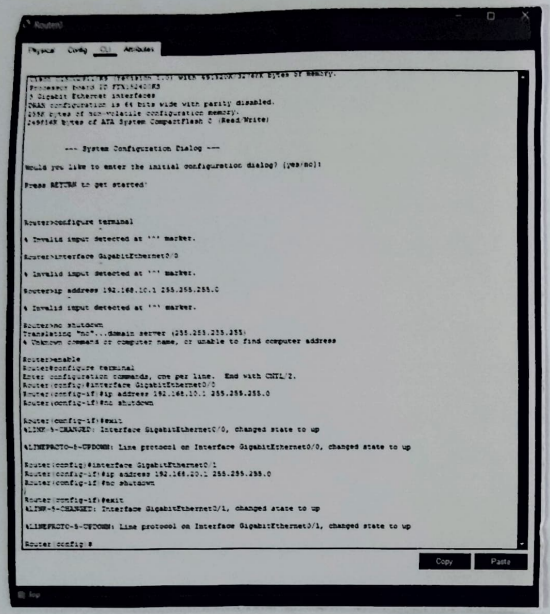
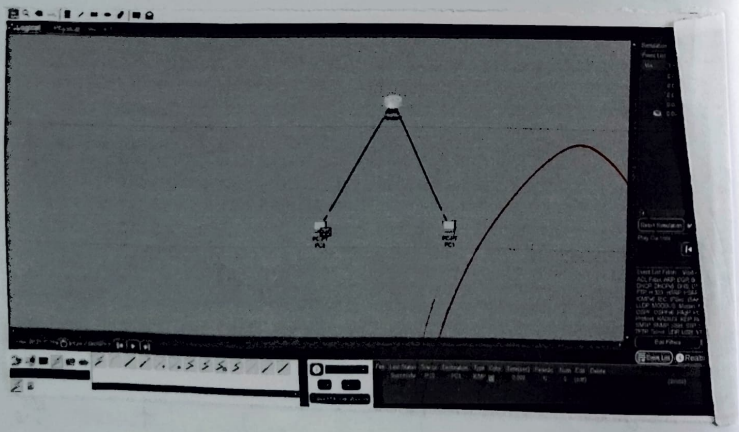


Expno:10


# Customer switch with network modules using cisco packet tracer


Aim:


To customize a cisco switch by adding or removing network modules using cisco Tracer and verify the changes in the switch interfaces.

Procedure:

1. open cisco Packet Tracer.
2. Add a modular switch to the workshop.
3. open the physical tab and turn off the switch.
4. Remove the existing module, if required and insert a compatible network module.
5. Turn on the switch and verify the new interfaces.
6. Connect two PCs to the switch using Copper-Straight-Through cables.
7. configure the IP addresses of the PCs eg 192.168.10.2 and 192.168.10.3, with Subnet mask.
8. open PC0's Command prompt and type Ping 192.168.10.3 to test connectivity.
9. Save the packet Tracer file.

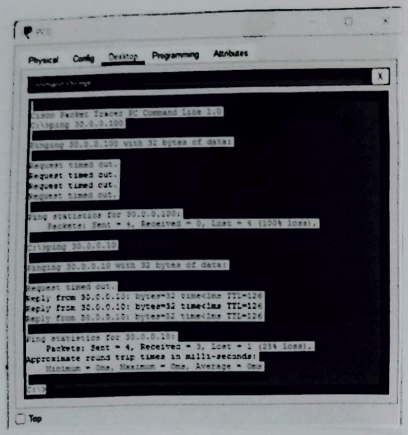

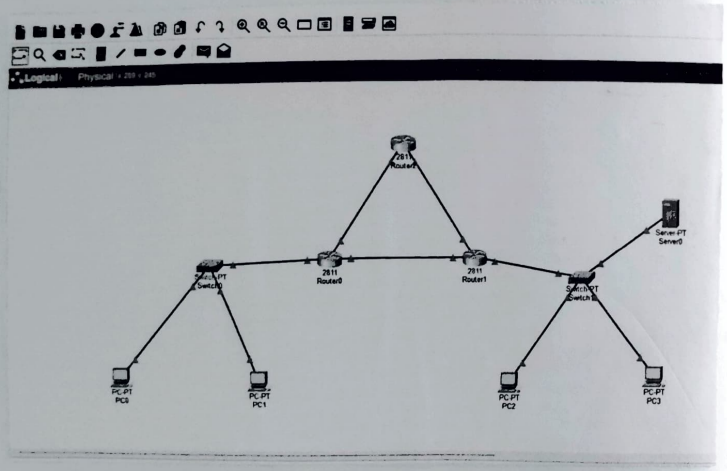
Exp No: 11

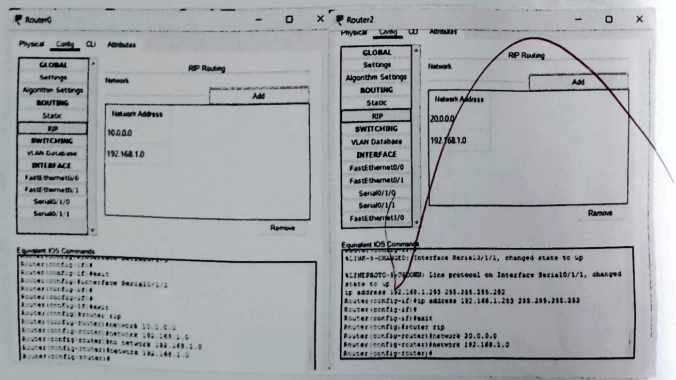
# Examine Network address Translation (NAT) using Cisco Packet Tracer.

**Aim:**

To configure and examine Network address translation (NAT) using Cisco packet tracker and verify communication between a private network and a public network.

**Procedure**

1. open Cisco Packet Tracer
2. Add one router, one switch, one PC and one Server.
3. connect the devices using copper Straight-Through cables.
4. Configure the router's inside interface with IP address 192.168.1.1 and outside interface with IP address 192.168.2.1
5. Configure Static NAT to map private 192.168.1.2 to public IP 200.1.1.100,
6. Assign IP addresses and default gateways to the PC and Server
7. From the PC's Command prompt, execute ping 200.1.1.2 to test connectivity.
8. On the router CLI, execute show ip nat translations to verify the NAT translation.

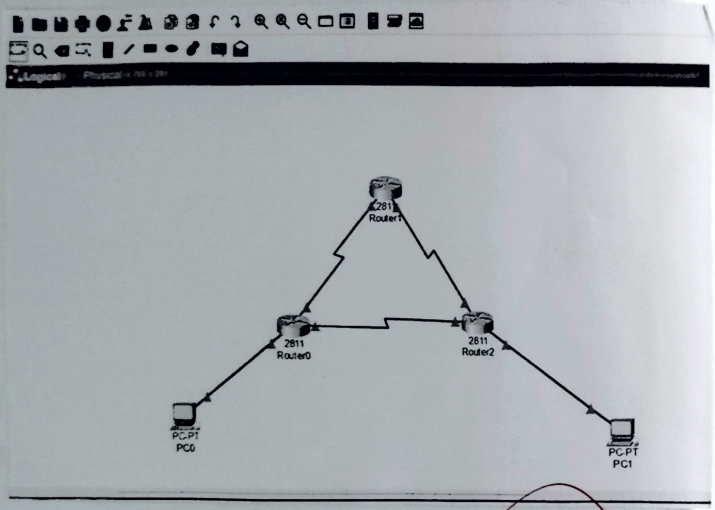


Result:

Thus, Network address Translation (NAT) was configured successfully using cisco Packet Tracer, and communication between the Private and public networks was tested.