Customize Switch with Network modules using Cisco Packet tracer.

Aim:

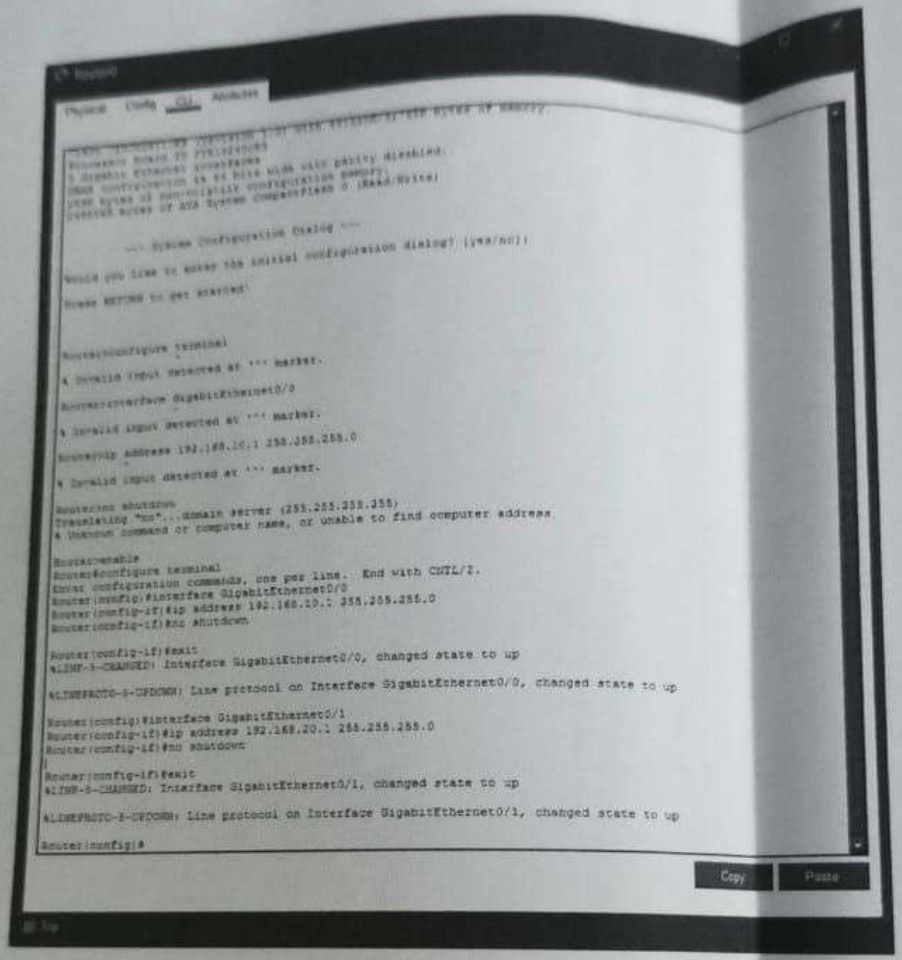
To customize a Cisco switch by adding or removing network modules using Cisco Packet Tracer and verify the changes in the switch interfaces.

Procedure:

* Open Cisco packet tracer.
* Add the modular switch to the workspace.
* Open the Physical tab and turn off the switch.
* Remove the existing module, if required, and insert a compatible network module.
* Turn on the switch and verify the new interfaces.
* Configure the IP address of the PCs as 192.168.10.2 and 192.168.10.3 with subnet mask 255.255.255.0
* Open PC0's command Prompt and type ping 192.168.10.3 to test connectivity.
* Save the Packet tracer file.

Result:

Thus, the switch was customized successfully by adding a network module, and connectivity between the two PCs was verified using the ping command.


Physical Config CLI Attributes
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]:
Press RETURN to get started!
Router>configure terminal
% Invalid input detected at '^' marker.
Router>interface GigabitEthernet0/0
% Invalid input detected at '^' marker.
Router#ip address 192.168.10.1 255.255.255.0
% Invalid input detected at '^' marker.
Router#no shutdown
Translating "no"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config)#interface GigabitEthernet0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config)#
Copy
Paste

