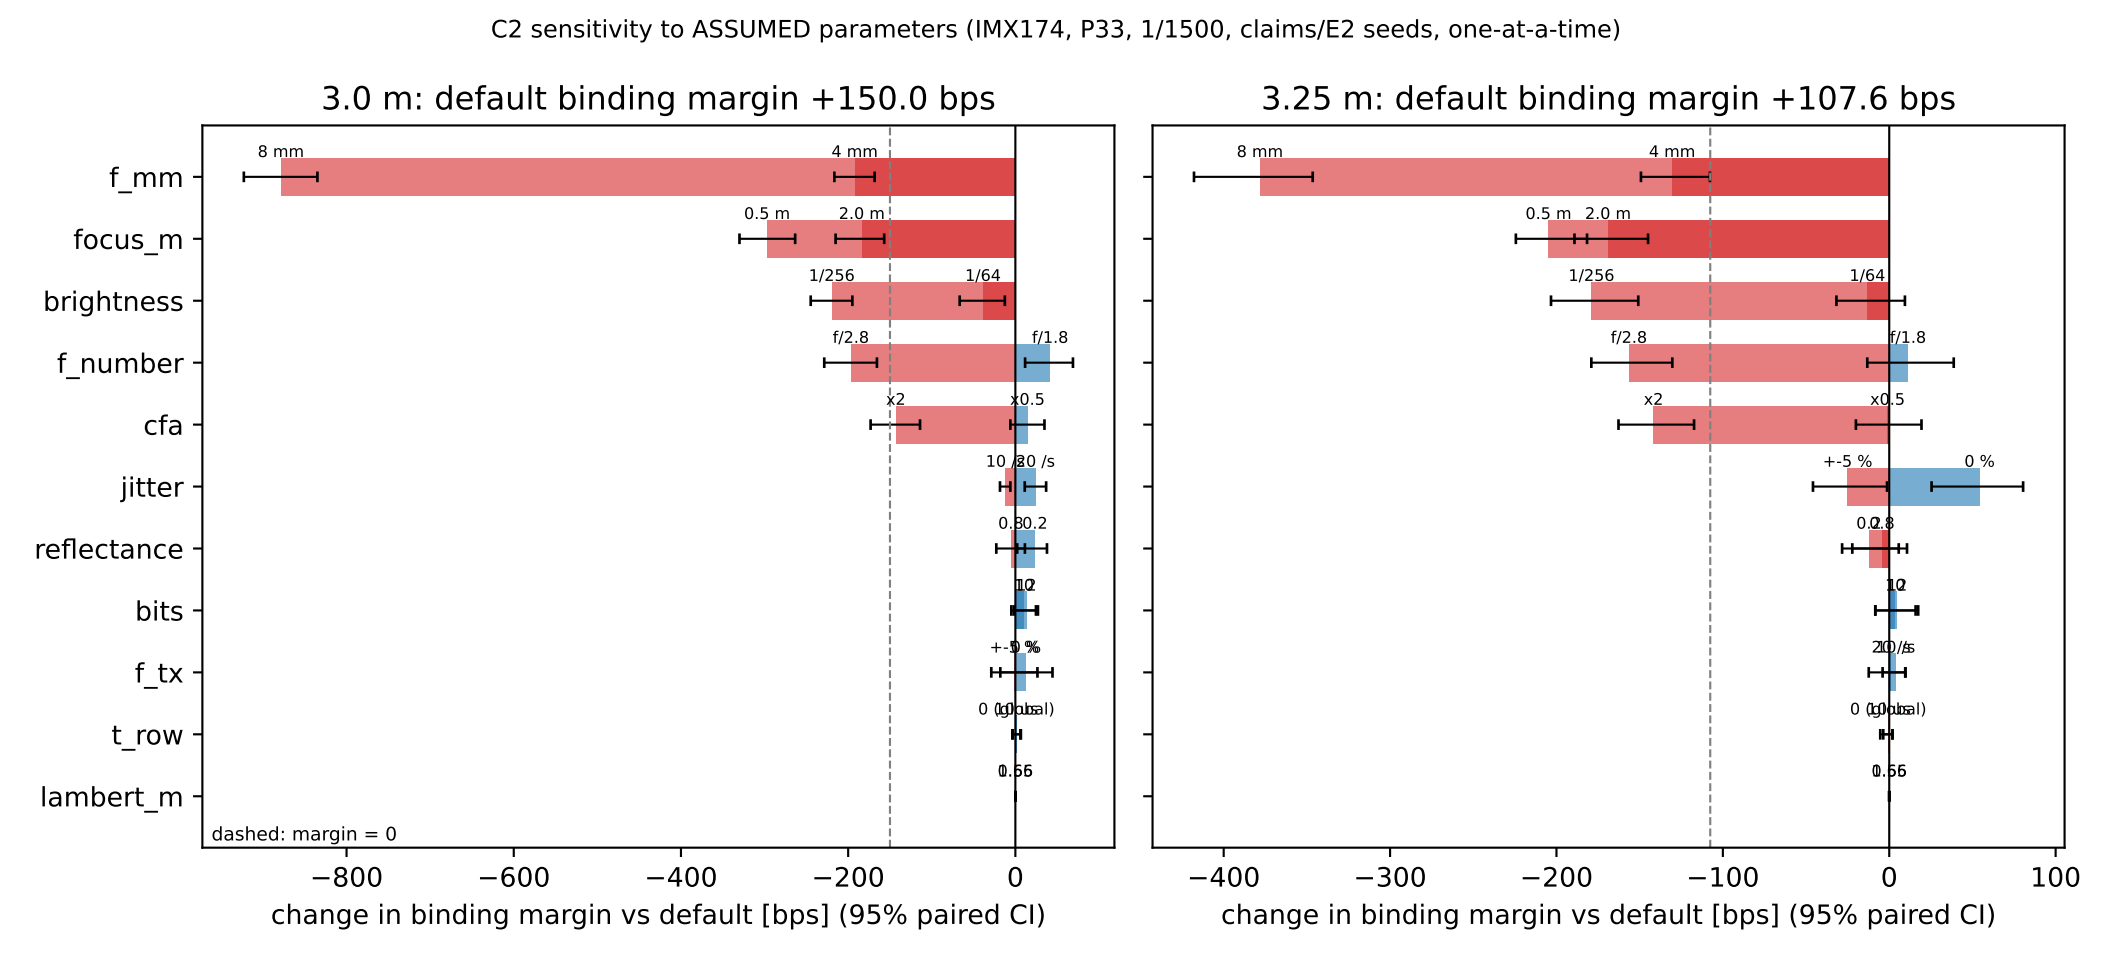
C2 sensitivity to ASSUMED parameters (IMX174, P33, 1/1500, claims/E2 seeds, one-at-a-time)
3.0 m: default binding margin +150.0 bps
3.25 m: default binding margin +107.6 bps
f_mm
focus_m
brightness
f_number
cfa
jitter
reflectance
bits
f_tx
t_row
lambert_m
8 mm
4 mm
0.5 m
2.0 m
1/256
1/64
f/2.8
f/1.8
x2
x0.5
+-5 %
0 %
dashed: margin = 0
−800
−600
−400
−200
0
−400
−300
−200
−100
0
100
change in binding margin vs default [bps] (95% paired CI)
change in binding margin vs default [bps] (95% paired CI)