



An abstract graphic on the left side of the image, consisting of a network of thin, light-blue lines and small circles, resembling a circuit board or a neural network. The lines are vertical and horizontal, with some diagonal connections, and the circles are placed at various points along these lines.

ROWBOATICS

Circuit Diagram of boat

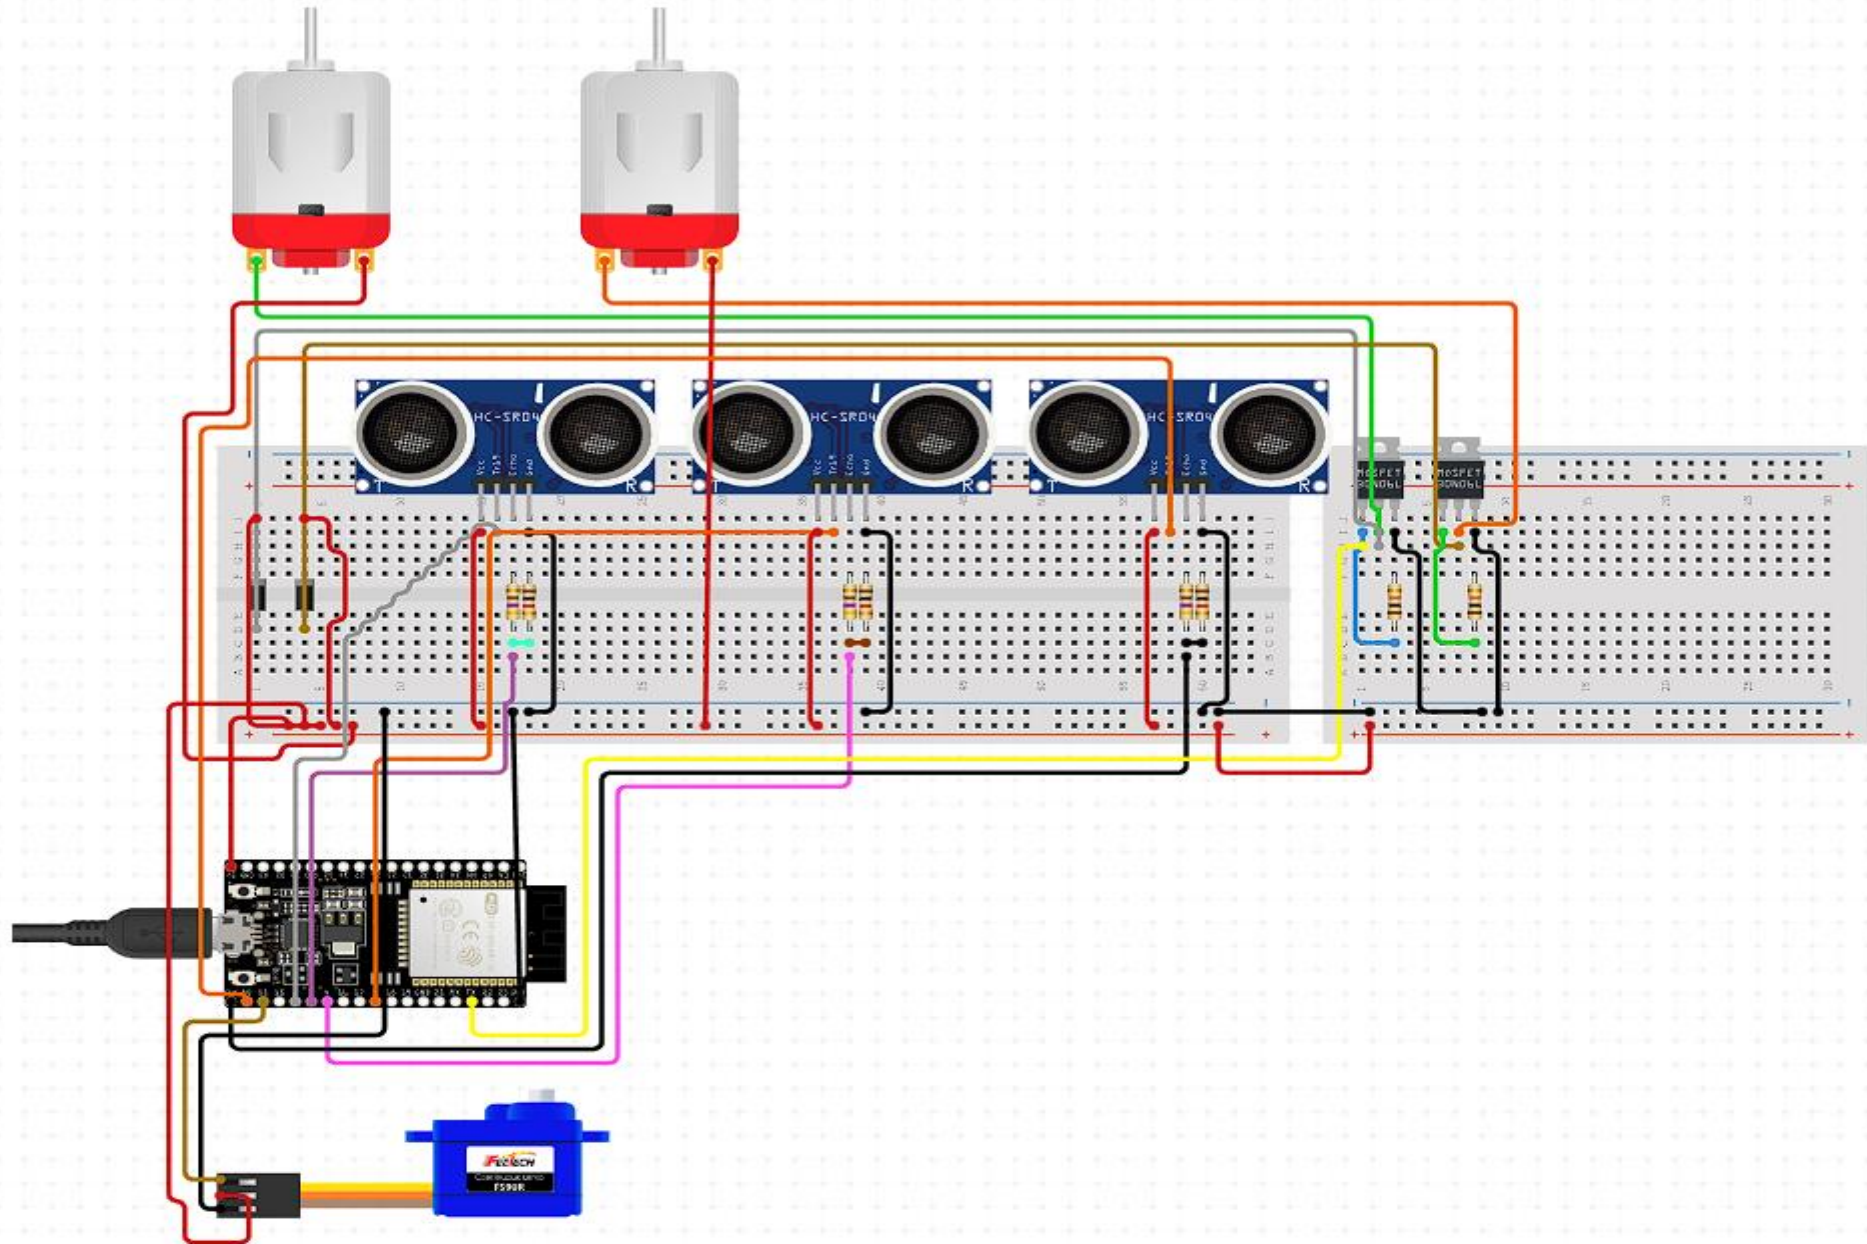

Circuit Diagram of remote

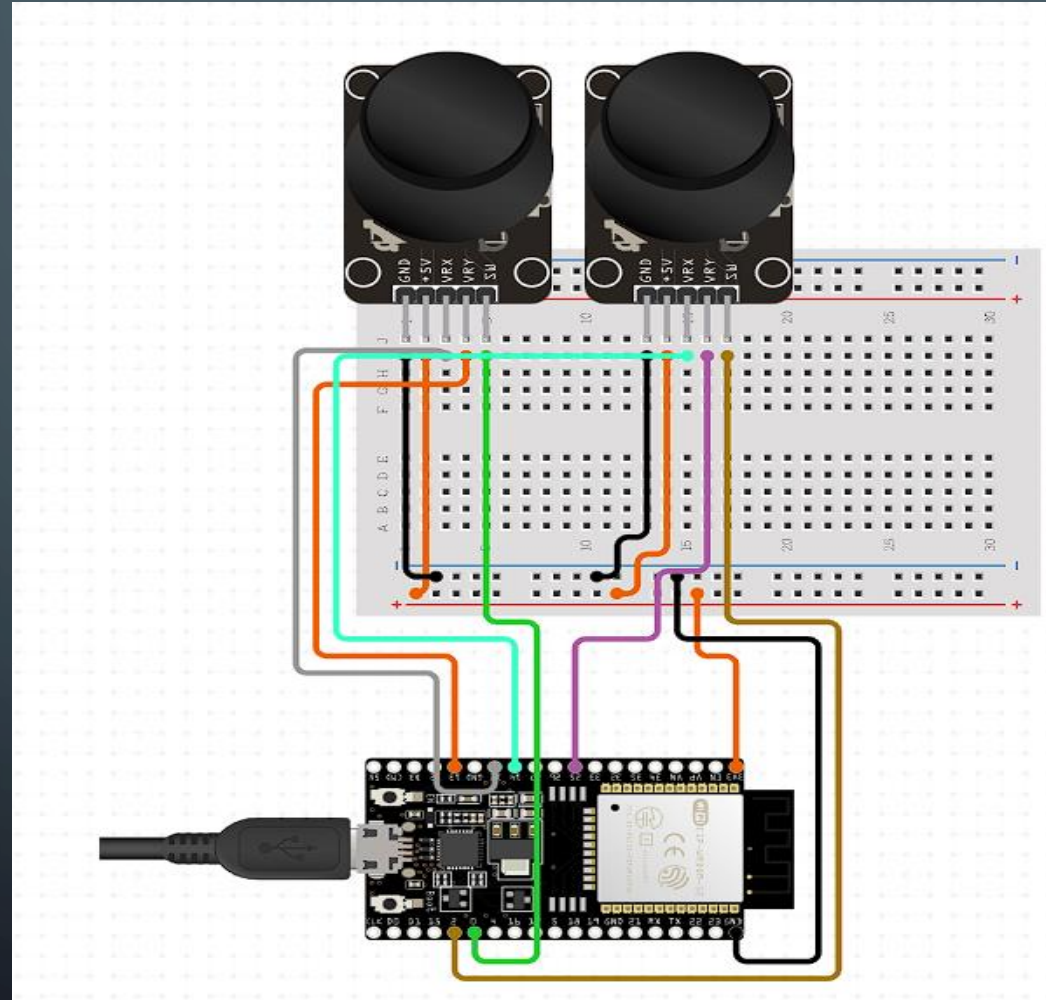

Component list

Sr. No	Component	Quantity
1	ESP32 - DevKitC	2
2	Standard Gearmotor - 107 RPM (12V)	2
3	Continuous Rotation Micro Servo - FS90R	1
4	1K Ohm Resistor	5
5	N-Channel MOSFET 60V 30A	2
6	10K Ohm Resistor	5
7	Jumper Wires Pack - M/M	-
8	Jumper Wires Pack - M/F	-
9	3 D printed boat	1
10	Radio Transmitter	1
11	Radio reciver	1
12	Joy stick	2

Total cost ₹8000

COMPONENTS DETAILS


- ❑ Two High Powered motors are used to achieve more speed
- ❑ A servo motor is used to change the direction of the boat
- ❑ The ultrasonic sensors will be attached on three sides (Front , Left Side and Right Side) to avoid the boat to collide with the hurdles
- ❑ A ESP32 will be used as the brain.
- ❑ N-Channel MOSFET will be used to amplify the electronic signal
- ❑ A radio transmitter will de connecter to the remote to control it



Boat from back



Boat riding

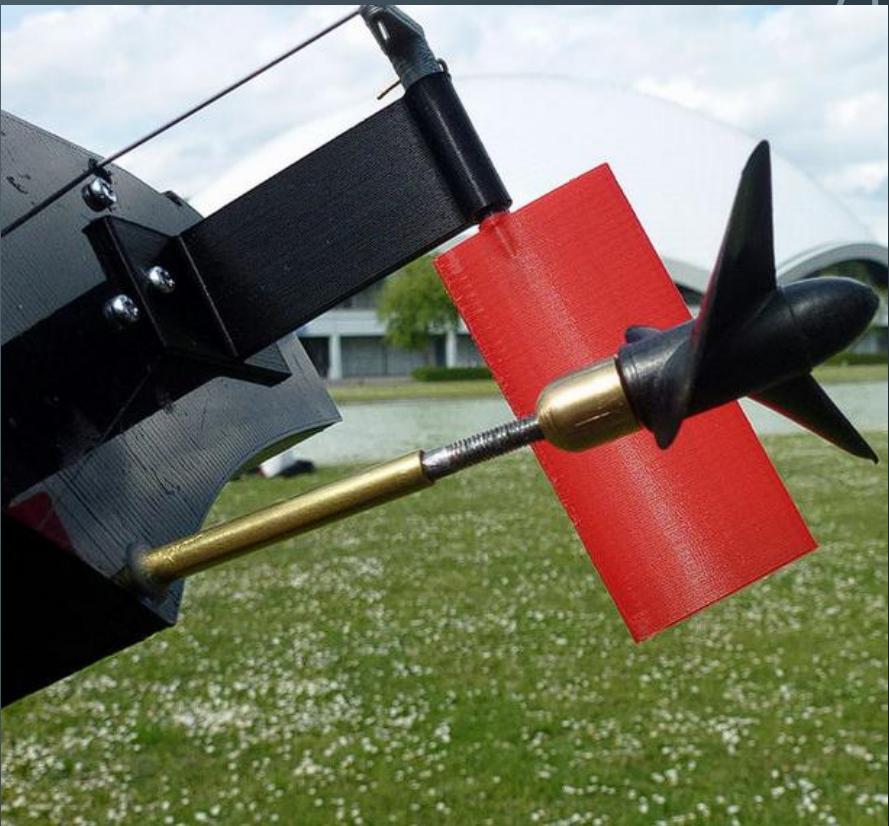

Boat Motor