





VENTILADOR

CENTRÍFUGO MULTIPALA - TDA

de doble aspiración




Inyección de aire limpio dentro de equipos HVAC

Es ideal para extracción localizada en procesos de industria. Componente de equipos Tempomatic



> REFERENCIAS DE TAMAÑO

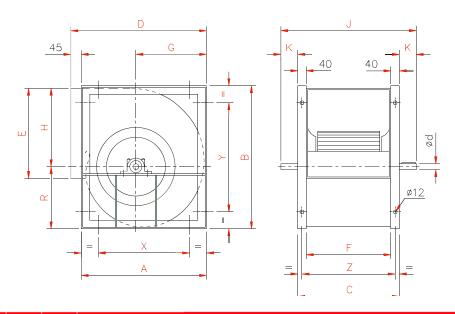

TAMAÑO	Α	В	С	D	E	F	G	Н		J	K	L	М	пхр	Ød	peso (kg.)
7/7	307	321	232	209	179	146	28	227	58	392	80	296	276	10x15	19.05	4,9
10/8	427	441	274	289	246	207	38	317	85	442	84	338	318	10x15	19.5	9.4
12/9	497	522	309	341	291	236	38	400	82	493	92	373	353	10x15	25.4	13.7
12/12	497	522	386	341	291	236	38	400	82	570	92	450	430	10x15	25.4	15.7
15/15	580	616	473	402	344	272	39	460	93	665	96	543	517	12x20	25.4	24.2
18 / 13	688	743	428	480	416.5	320	41	580	88	638	105	498	472	12x20	30	28.3
18/18	688	743	556	480	416.5	320	41	580	88	766	105	626	600	12x20	30	34

TAMAÑO	Α	В	С	D	E	F	G	Н		K	R	Х	Υ	Z	Ød	peso (kg.)
22/22	863	1019	735	908	694	655	509	575	925	95	436.2	663	819	699	35	94
25/25	953	1142	845	998	794	765	571	644	1035	95	490.5	753	942	809	35	113
30 / 28	1159	1374	968	1204	932	888	687	778	1230	131	588	959	1174	932	40	145

MEDIDAS EN MILÍMETROS

