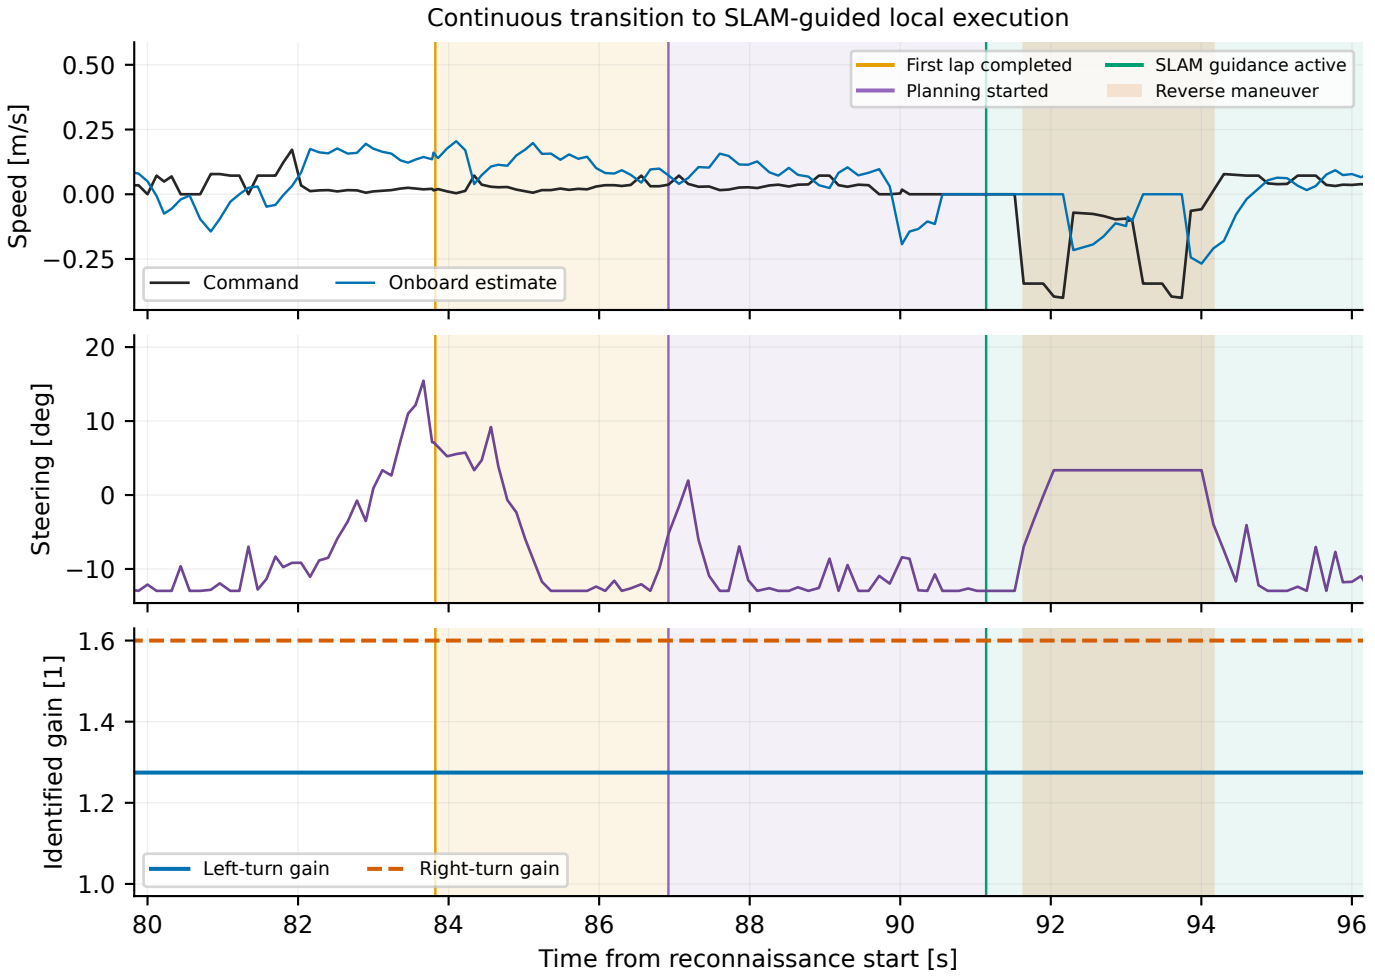
Continuous transition to SLAM-guided local execution
First lap completed
Planning started
SLAM guidance active
Reverse maneuver
Speed [m/s]
0.50
0.25
0.00
−0.25
Command
Onboard estimate
Steering [deg]
20
10
0
−10
Identified gain [1]
1.6
1.4
1.2
1.0
Left-turn gain
Right-turn gain
80
82
84
86
88
90
92
94
96
Time from reconnaissance start [s]