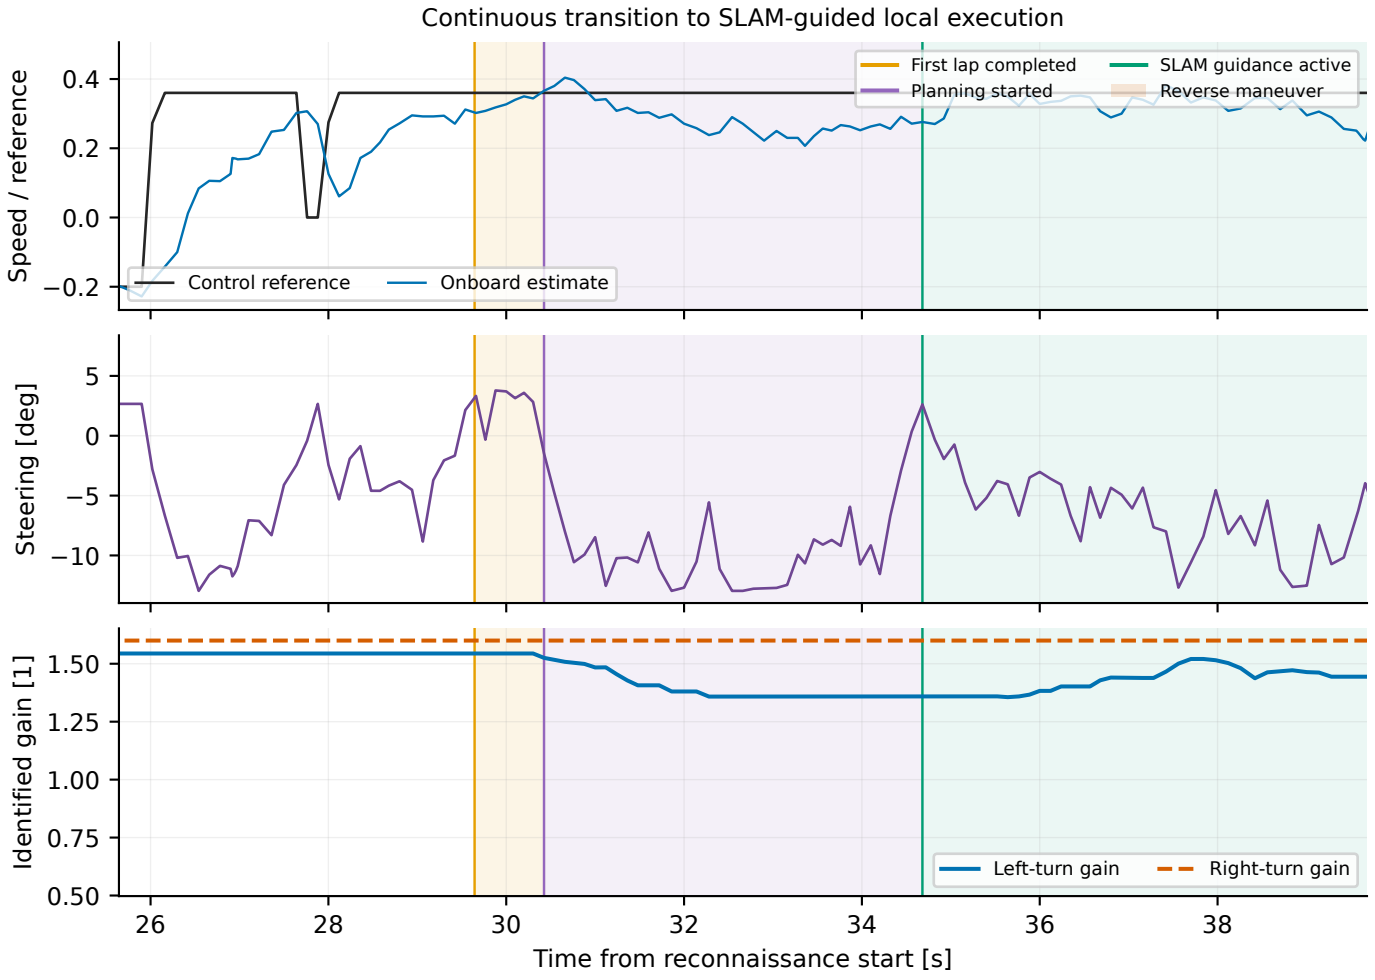
Continuous transition to SLAM-guided local execution
First lap completed
Planning started
SLAM guidance active
Reverse maneuver
Speed / reference
0.4
0.2
0.0
−0.2
Control reference
Onboard estimate
Steering [deg]
5
0
−5
−10
Identified gain [1]
1.50
1.25
1.00
0.75
0.50
Left-turn gain
Right-turn gain
26
28
30
32
34
36
38
Time from reconnaissance start [s]