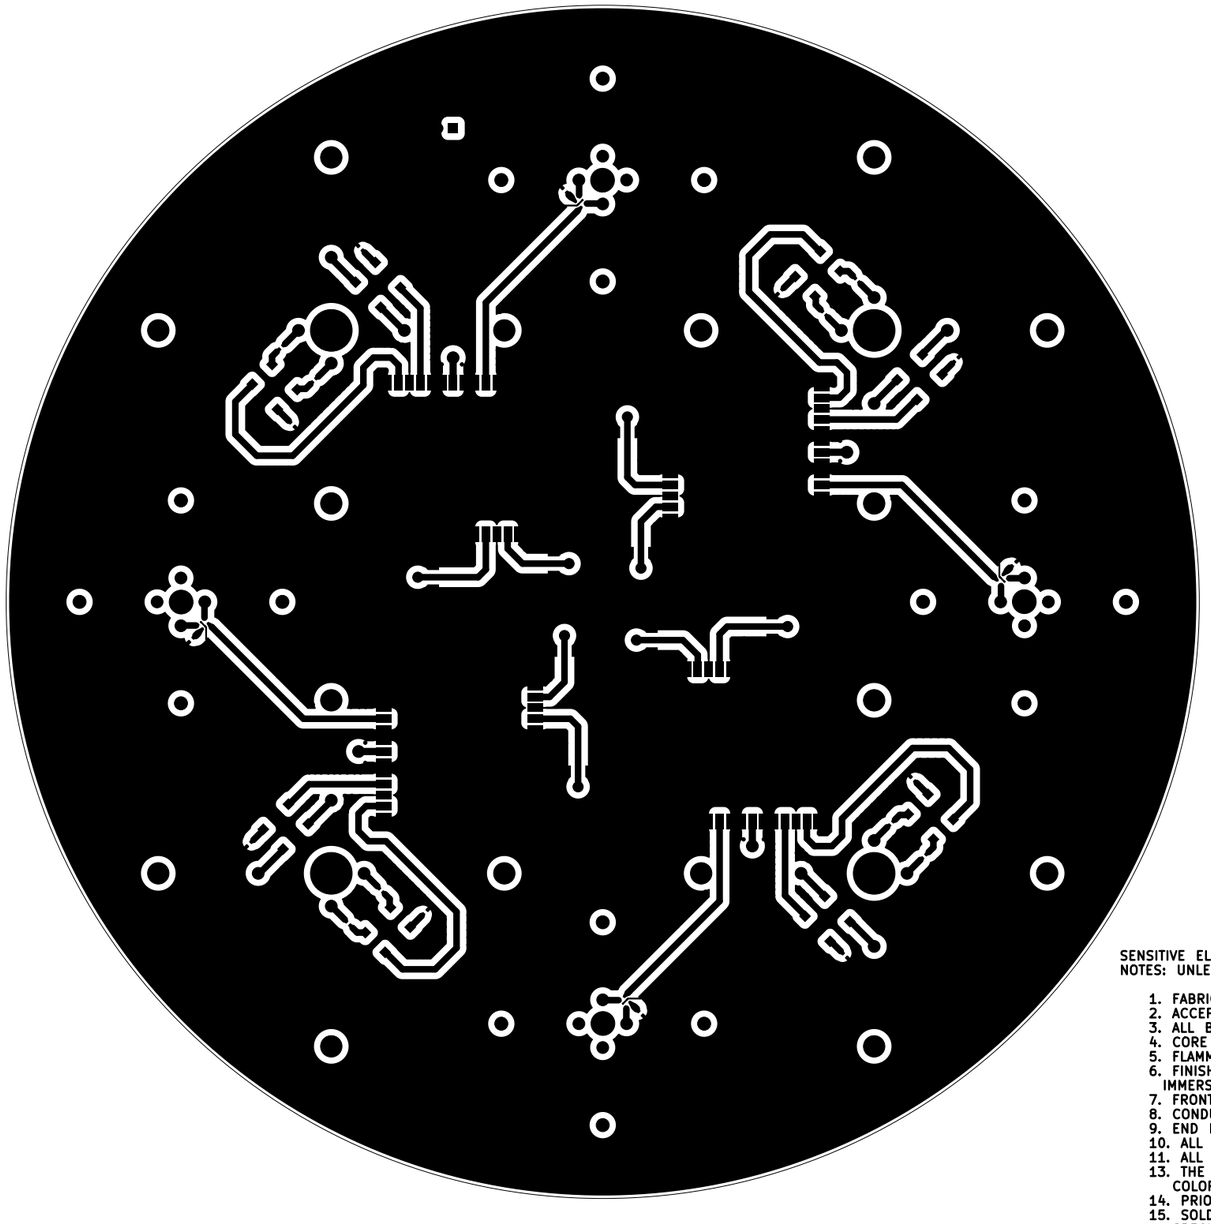


BOARD CHARACTERISTICS

Copper layer count:	6	Board thickness:	1.7510 mm
Board overall dimensions:	199.9975 mm x 200.0050 mm		
Min track/spacing:	0.3000 mm / 0.2000 mm	Min hole diameter:	0.5000 mm
Copper finish:	None	Impedance control:	Yes
Castellated pads:	No	Press-fit pads:	No
Plated board edge:	No	Edge card connectors:	No

Layer Name	Type	Material	Thickness	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top silk screen	Not specified	Not specified	Not specified	1	0
F.Paste	Top solder paste		Not specified		1	0
F.Mask	Top solder mask	Not specified	0.01 mm	Not specified	3.3	0
F.Cu	Copper		0.018 mm		1	0
Dielectric 1	Core	FR4	0.508 mm	Not specified	4.5	0.02
In1.Cu	Copper		0.018 mm		1	0
Dielectric 2	Prepreg	FR4	0.2 mm	FR4 natural	4.5	0.02
In2.Cu	Copper		0.025 mm		1	0
Dielectric 3	Core	FR4	0.2 mm	FR4 natural	4.5	0.02
In3.Cu	Copper		0.018 mm		1	0
Dielectric 4	Prepreg	FR4	0.2 mm	FR4 natural	4.5	0.02
In4.Cu	Copper		0.018 mm		1	0
Dielectric 5	Core	RO4350B	0.508 mm	Not specified	3.66	0.004
B.Cu	Copper		0.018 mm		1	0
B.Mask	Bottom solder mask	Not specified	0.01 mm	Not specified	3.3	0
B.Paste	Bottom solder paste		Not specified		1	0
B.Silkscreen	Bottom silk screen	Not specified	Not specified	Not specified	1	0

SENSITIVE ELECTRONIC DEVICES-CLASS 1
NOTES: UNLESS OTHERWISE SPECIFIED.

1. FABRICATE IN ACCORDANCE WITH LATEST IPC-6012 SPECIFICATIONS, CLASS 2.
2. ACCEPTABILITY SHALL BE BASED ON LATEST IPC-A-600 SPECIFICATIONS, CLASS 2.
3. ALL BASE MATERIAL SHALL BE IN ACCORDANCE WITH LATEST IPC-4101/126 SPECIFICATIONS.
4. CORE MATERIALS ARE REGISTERED LAMINATES PER LATEST IPC-4121 SPECIFICATIONS.
5. FLAMMABILITY RATINGS SHALL BE IN ACCORDANCE WITH UL 64V-0 (OR 64V-1 IF 64V-0 IS UNAVAILABLE). AS MANDATED BY STANDARDS UL61010A-1, IEC61010-1
6. FINISH: ELECTROLESS NICKEL IMMERSION GOLD (ENIG) WITH A NORMAL 3-7 MICRO-INCH IMMERSION GOLD OVER 150-200 MICRO-INCH IMMERSION NICKEL ON ALL EXPOSED TRACES AND FEATURES.
7. FRONT AND BACK PATTERN SHALL REGISTER WITHIN .003" RTP.
8. CONDUCTOR EDGES TO BE FREE OF LOOSE SLIVERS AND ROUGH EDGES.
9. END PRODUCT CONDUCTOR WIDTHS AND CIRCUIT FEATURES SHALL NOT VARY MORE THAN 0.002" FROM THE 1:1 DIMENSIONS OF THE MASTER PATTERN.
10. ALL TOOLING HOLES MUST BE DRILLED DURING PRIMARY DRILL STAGE, SECONDARY DRILL STAGE SHALL NOT BE PERMITTED.
11. ALL PLATED THRU HOLES AND CONDUCTIVE SURFACES SHALL BE PLATED WITH A MINIMUM THICKNESS OF .001" COPPER.
13. THE LEGEND SHALL BE PRINTED USING NON-CONDUCTIVE PERMANENT EPOXY INK. COLOR: WHITE.
14. PRIOR TO SOLDERMASK, THE BOARD SHALL BE CLEANED AND FREE OF CONTAMINANTS OR RESIDUES.
15. SOLDERMASK: SHALL BE GREEN LIQUID PHOTO-IMAGEABLE (LPI) PER LATEST IPC-SM-840 SPECIFICATIONS, TYPE-B, CLASS2, REGISTRATION ALLOWANCE .003" RTP.
16. PRINTING REGISTRATION ALLOWANCE IS 0.005". THERE SHALL BE NO INK ON. ANY SOLDER PAD OR LAND.
17. ALL THE BOARD SHALL BE ELECTRICALLY TESTED TO THE NET LIST USING IPC-D-356 FOR CONTINUITY OPEN AND SHORTS. CONTINUITY OPENS AND SHORTS.
18. ALL PROCESSES ARE TO MAINTAIN COMPLIANCE WITH ROHS DIRECTIVE 2002/95/EC.